



Local Public Agency
Formal Contract Proposal



COVER SHEET

Proposal Submitted By:

Contractor's Name

Contractor's Address

City

State

Zip Code

STATE OF ILLINOIS

Local Public Agency

McHenry County D.O.T.

County

McHenry

Section Number

21-00530-00-PP

Route(s) (Street/Road Name)

16111 Nelson Road

Type of Funds

MFT

Proposal Only Proposal and Plans Proposal only, plans are separate

Submitted/Approved

For Local Public Agency:

For a County and Road District Project

Submitted/Approved

Highway Commissioner Signature

Date

Submitted/Approved

County Engineer/Superintendent of Highways

Date

For a Municipal Project

Submitted/Approved/Passed

Signature

Date

Official Title

Department of Transportation

Released for bid based on limited review

Regional Engineer Signature

Date

Jos. Z. Kopaleski Jr.

03.23.21

Note: All proposal documents, including Proposal Guaranty Checks or Proposal Bid Bonds, should be stapled together to prevent loss when bids are processed.

County Engineer
On behalf of IDOT pursuant to Agreement
of Understanding dated March 4, 2005

Local Public Agency	County	Section Number	Route(s) (Street/Road Name)
McHenry County D.O.T.	McHenry	21-00530-00-PP	16111 Nelson Road

NOTICE TO BIDDERS

Sealed proposals for the project described below will be received at the office of McHenry County Division of Transportation
 16111 Nelson Rd. Woodstock, IL 60098 until 9:00 AM on 04/07/21
Address Time Date

Sealed proposals will be opened and read publicly at the office of McHenry County Division of Transportation
 16111 Nelson Road, Woodstock, IL 60098 at 9:00 AM on 04/07/21
Address Time Date


DESCRIPTION OF WORK

Location	Project Length
Ramer & Oak Grove roads	1.7 mi

Proposed Improvement
 Construction of HMA IL 9.5 Surface Cse. FG N50 - TLO 3/4", HMA Butt Joints, Agg. shoulders, HMA patching, Grooved Thermo Striping, ADA work w/other necessary and related work

1. Plans and proposal forms will be available in the office of
 Proposal Available: <https://www.co.mchenry.il.us/county-government/departments-j-z/transportation/doing-business/bid-documents>

2. Prequalification
 If checked, the 2 apparent as read low bidders must file within 24 hours after the letting an "Affidavit of Availability" (Form BC 57) in triplicate, showing all uncompleted contracts awarded to them and all low bids pending award for Federal, State, County, Municipal and private work. One original shall be filed with the Awarding Authority and two originals with the IDOT District Office.
3. The Awarding Authority reserves the right to waive technicalities and to reject any or all proposals as provided in BLRS Special Provision for Bidding Requirements and Conditions for Contract Proposals.
4. The following BLR Forms shall be returned by the bidder to the Awarding Authority:
 - a. Local Public Agency Formal Contract Proposal (BLR 12200)
 - b. Schedule of Prices (BLR 12201)
 - c. Proposal Bid Bond (BLR 12230) (if applicable)
 - d. Apprenticeship or Training Program Certification (BLR 12325) (do not use for project with Federal funds.)
 - e. Affidavit of Illinois Business Office (BLR 12326) (do not use for project with Federal funds)
5. The quantities appearing in the bid schedule are approximate and are prepared for the comparison of bids. Payment to the Contractor will be made only for the actual quantities of work performed and accepted or materials furnished according to the contract. The scheduled quantities of work to be done and materials to be furnished may be increased, decreased or omitted as hereinafter provided.
6. Submission of a bid shall be conclusive assurance and warranty the bidder has examined the plans and understands all requirements for the performance of work. The bidder will be responsible for all errors in the proposal resulting from failure or neglect to conduct an in depth examination. The Awarding Authority will, in no case, be responsible for any costs, expenses, losses or changes in anticipated profits resulting from such failure or neglect of the bidder.
7. The bidder shall take no advantage of any error or omission in the proposal and advertised contract.
8. If a special envelope is supplied by the Awarding Authority, each proposal should be submitted in that envelope furnished by the Awarding Agency and the blank spaces on the envelope shall be filled in correctly to clearly indicate its contents. When an envelope other than the special one furnished by the Awarding Authority is used, it shall be marked to clearly indicate its contents. When sent by mail, the sealed proposal shall be addressed to the Awarding Authority at the address and in care of the official in whose office the bids are to be received. All proposals shall be filed prior to the time and at the place specified in the Notice to Bidders. Proposals received after the time specified will be returned to the bidder unopened.
9. Permission will be given to a bidder to withdraw a proposal if the bidder makes the request in writing or in person before the time for opening proposals.

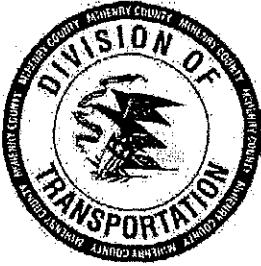

McHenry County Division of Transportation

16111 Nelson Road
Woodstock, IL 60098

Request for Authorization to Bid

IDOT Contractor Number: _____
Letting Date: _____

TYPE OR USE BLACK INK

SPECIAL NOTICE

Companies wishing to bid **MUST** request Authorization to Bid.

TO EXPEDITE THIS REQUEST, PLEASE PRINT LEGIBLY AND FOLLOW THE INSTRUCTIONS ON PAGE TWO.

Part A:

Companies that wish to bid on McHenry County Division of Transportation (MCDOT) projects, as the prime contractor, **must** submit a **Request for Authorization to Bid** form to MCDOT, filling in Part A. MCDOT will email an **Authorization to Bid** letter to the company within three (3) working days.

We request **Authorization to Bid** on the following projects.

Please list our Company on the **For Bid List** for the following projects (check all that apply):

<input type="checkbox"/>	_____	<input type="checkbox"/>	_____	<input type="checkbox"/>	_____	<input type="checkbox"/>	_____
<input type="checkbox"/>	_____	<input type="checkbox"/>	_____	<input type="checkbox"/>	_____	<input type="checkbox"/>	_____
<input type="checkbox"/>	_____	<input type="checkbox"/>	_____	<input type="checkbox"/>	_____	<input type="checkbox"/>	_____

MCDOT will review the request and issue an **Authorization to Bid** only on the projects checked and listed in Part A.

Part B:

Companies downloading plans and/or specifications that wish to be placed on the **Not for Bid List**, **must** submit a **Request for Authorization to Bid** form to MCDOT, filling in Part B.

Please list our Company on the **Not For Bid List** for the following items (check all that apply):

<input type="checkbox"/>	_____	<input type="checkbox"/>	_____	<input type="checkbox"/>	_____	<input type="checkbox"/>	_____
<input type="checkbox"/>	_____	<input type="checkbox"/>	_____	<input type="checkbox"/>	_____	<input type="checkbox"/>	_____
<input type="checkbox"/>	_____	<input type="checkbox"/>	_____	<input type="checkbox"/>	_____	<input type="checkbox"/>	_____

Part C:

Company Name: _____
 Contact Person: _____
 Company Address (*): _____
For United Parcel Delivery

City _____ State _____ Zip Code _____

Post Office Box No. (*): _____
 Box No. _____ *For First Class Delivery*

City _____ State _____ Zip Code _____

E-Mail: _____
 Phone No.: _____ Fax No.: _____

(*) Complete street address and post office box information are required.

E-mail to: MCDOTBidDocs@co.mchenry.il.us or Fax to: MCDOT at (815) 334-4989, Attn: MCDOT Bid Docs

Instructions

1. Using a computer or **Black Ink (PLEASE PRINT)** complete the MCDOT Request for Authorization to Bid form (Page 1).
2. To be placed on the **For Bid List** and request **Authorization to Bid** on specific MCDOT projects, check and include the section number(s) (XX-XXXXX-XX-XX) in Part A, that apply.
3. To be placed on the **Not For Bid List**, check and include the section number(s) (XX-XXXXX-XX-XX) in Part B, that apply.
4. Fill in all information in Part C.
5. **E-mail** the completed Request for Authorization to Bid form (Page 1) along with a copy of your current IDOT prequalification **Certificate of Eligibility** and **Affidavit of Availability** to MCDOTBidDocs@co.mchenry.il.us or Fax the completed Request for Authorization to Bid form (Page 1) along with a copy of your current IDOT prequalification **Certificate of Eligibility** and **Affidavit of Availability** to MCDOT at (815) 334-4989, attention MCDOT Bid Docs. Certificate not required for materials letting.
6. Requests for **Authorization to Bid** will not be processed after 4:00 p.m., three (3) calendar days preceding the published letting date as specified on form BLR 12200, Notice to Bidders, in the various project specifications.

Companies that have not received an Authorization to Bid letter within three (3) working days of submitting their request should contact MCDOT at (815) 334-4960 to check on their status.

ELECTRONIC PLANS & SPECIFICATIONS

HOW TO OBTAIN ELECTRONIC PLANS & SPECIFICATIONS?: Project plans and/or specifications may be downloaded from MCDOT's website at <http://www.co.mchenry.il.us/county-government/departments-i-z/transportation/doing-business/bid-documents>. A CD containing the plans and specifications for the project(s) may be purchased from MCDOT at a cost of \$20. Contact MCDOT at (815) 334-4960 to request a CD. Hard copies of the plans and/or specifications will be available by request for a fee. **Three (3) days advance notice is required for both requests.**

ADDENDA: Companies downloading plans and/or specifications from the internet are responsible for checking the McHenry County Division of Transportation web site (<http://www.co.mchenry.il.us/county-government/departments-i-z/transportation/doing-business/bid-documents>) for any project ADDENDA. Companies that sign up for the electronic notification will be alerted to addenda when they are published. **It is each Company's responsibility to download any addenda and include them with their proposal(s).**

WHO CAN BID?: Bids will be accepted from only those companies that request and receive written **Authorization to Bid** letter from MCDOT.

WHAT IS AUTHORIZATION TO BID?: A Company that wishes to bid on a MCDOT project, as the prime contractor, **must** submit a **Request for Authorization to Bid** form, filling in Part A and select which project(s) they wish to bid on, to MCDOT along with a copy of their IDOT prequalification **Certificate of Eligibility** and **Affidavit of Availability**. Certificate not required for Materials Lettings. MCDOT will review the request and issue an **Authorization to Bid** letter indicating which projects the Company is authorized to bid on. If a Company is not authorized to bid on a project, the **Authorization to Bid** letter will indicate the reason for denial.

WHAT MUST BE INCLUDED IN THE BID PROPOSAL: Companies do not need to return the entire bid package when submitting a bid proposal. The following documents must be included in the bid proposal:

FOR CONTRACT PROPOSAL:

- Local Public Agency Formal Contract Proposal (BLR 12200)
- Schedule of Prices (BLR 12200a) (**Note: Written bid will not be accepted and will be subject to rejection of bid.**)
- Local Agency Proposal Bid Bond (BLR 12230)
- Apprenticeship or Training Program Certification (BLR 12325) [If included in the bid package]
- Affidavit of Illinois Business Office (BLR 12326)
- Affidavit of Availability (BC 57)

FOR MATERIAL PROPOSAL:

- Local Public Agency Material Proposal or Deliver & Install Proposal (BLR 12240)
- Material Proposal Schedule of Prices (BLR 12241)

All proposal documents, including the Proposal Guaranty Checks or Proposal Bid Bonds, should be stapled together to prevent loss.

MCDOT does not accept electronic bids. Signed and sealed paper copy proposals **must** be submitted.

MCDOT recommends that Companies deliver their proposals in person to insure they arrive at 16111 Nelson Road, Woodstock, Illinois 60098, prior to the time specified on form BLR 12200, under Notice to Bidders. **Any bid(s) received after the time specified on form BLR 12200 will not be accepted.**

For Assistance Contact MCDOT at 815-334-4960

Local Public Agency	County	Section Number	Route(s) (Street/Road Name)
McHenry County D.O.T.	McHenry	21-00530-00-PP	16111 Nelson Road

PROPOSAL

1. Proposal of _____ Contractor's Name _____

_____ Contractor's Address _____

2. The plans for the proposed work are those prepared by _____ and approved by the Department of Transportation on _____

3. The specifications referred to herein are those prepared by the Department of Transportation and designated as "Standard Specifications for Road and Bridge Construction" and the " Supplemental Specifications and Recurring Special Provisions" thereto, adopted and in effect on the date of invitation for bids.

4. The undersigned agrees to accept, as part of the contract, the applicable Special Provisions indicated on the "Check Sheet for Recurring Special Provisions" contained in this proposal.

5. The undersigned agrees to complete the work within _____ working days or by 07/09/21 unless additional time is granted in accordance with the specifications.

6. The successful bidder at the time of execution of the contract will be required to deposit a contract bond for the full amount of the award. When a contract bond is not required, the proposal guaranty check will be held in lieu thereof. If this proposal is accepted and the undersigned fails to execute a contract and contract bond as required, it is hereby agreed that the Bid Bond of check shall be forfeited to the Awarding Authority.

7. Each pay item should have a unit price and a total price. If no total price is shown or if there is a discrepancy between the products of the unit price multiplied by the quantity, the unit price shall govern. If a unit price is omitted, the total price will be divided by the quantity in order to establish a unit price. A bid may be declared unacceptable if neither a unit price nor a total price is shown.

8. The undersigned submits herewith the schedule of prices on BLR 12201 covering the work to be performed under this contract.

9. The undersigned further agrees that if awarded the contract for the sections contained in the combinations on BLR 12201, the work shall be in accordance with the requirements of each individual proposal for the multiple bid specified in the Schedule for Multiple Bids below.

10. A proposal guaranty in the proper amount, as specified in BLRS Special Provision for Bidding Requirements and Conditions for Contract Proposals, will be required. Bid Bonds will be allowed as a proposal guaranty. Accompanying this proposal is either a bid bond, if allowed, on Department form BLR 12230 or a proposal guaranty check, complying with the specifications, made payable to: Glenda L. Miller Treasurer of McHenry County

The amount of the check is 5 % Bid Bond (_____).

Attach Cashier's Check or Certified Check Here

In the event that one proposal guaranty check is intended to cover two or more bid proposals, the amount must be equal to the sum of the proposal guaranties which would be required for each individual bid proposal. If the proposal guaranty check is placed in another bid proposal, state below where it may be found.

The proposal guaranty check will be found in the bid proposal for: Section Number 21-00530-00-PP



SCHEDULE OF PRICES

County McHenry
 Local Public Agency _____
 Section 21-00530-00-PP
 Route Ramer/Oak Grove Rd.

Schedule for Multiple Bids

Combination Letter	Sections Included in Combinations	Total

Schedule for Single Bid

(For complete information covering these items, see plans and specifications)

Bidder's Proposal for making Entire Improvements

Item No.	Items	Unit	Quantity	Unit Price	Total
1	BITUMINOUS MATERIALS - THIN LIFT (TACK COAT)	POUND	32,000.0		
2	HMA IL 9.5 SURFACE COURSE FG - TLO 3/4"	TON	1,600.0		
3	CLASS D PATCHES, TYPE IV, 6 INCH	SQ YD	100.0		
4	AGGREGATE SHOULDERS, TYPE B (SPECIAL)	TON	500.0		
5	TRAFFIC CONTROL AND PROTECTION, (SPECIAL)	L SUM	1.0		
6	CONSTRUCTING TEST STRIP - THIN LIFT	EACH	1.0		
7	SHORT TERM PAVEMENT MARKING (SPECIAL)	FOOT	3,200.0		
8	GROOVED THERMOPLASTIC PAVT MARK - L&S	SQ FT	158.8		
9	GROOVED THERMOPLASTIC PAVT MARK - LINE 4"	FOOT	28,950.0		
10	GROOVED THERMOPLASTIC PAVT MARK - LINE 6"	FOOT	300.0		
11	GROOVED THERMOPLASTIC PAVT MARK - LINE 8"	FOOT	100.0		
12	GROOVED THERMOPLASTIC PAVT MARK - LINE 12"	FOOT	250.0		
13	GROOVED THERMOPLASTIC PAVT MARK - LINE 24"	FOOT	82.0		
14	RECESSED REFLECTIVE PAVMENT MARKER	EACH	250.0		
15	RECESSED PAVEMENT MARKER REMOVAL	EACH	250.0		
16	HOT-MIX ASPHALT SURFACE REMOVAL - BUTT JOINT	SQ YD	1,600.0		
17	MIX DESIGN - HMA MIXTURE IL 9.5 FG - TLO	L SUM	1.0		
18	HMA CORING	EACH	8.0		
19	PORTLAND CEMENT CONCRETE SIDEWALK - 4"	CU YD	2.0		
20	DETECTABLE WARNINGS	SQ FT	40.0		
21	AGGREGATE BASE COURSE, TYPE A 6"	SQ YD	15.0		
22	EARTH EXCAVATION	CU YD	3.0		

Local Public Agency	County	Section Number	Route(s) (Street/Road Name)
McHenry County D.O.T.	McHenry	21-00530-00-PP	16111 Nelson Road

CONTRACTOR CERTIFICATIONS

The certifications hereinafter made by the bidder are each a material representation of fact upon which reliance is placed should the Department enter into the contract with the bidder.

1. **Debt Delinquency.** The bidder or contractor or subcontractor, respectively, certifies that it is not delinquent in the payment of any tax administered by the Department of Revenue unless the individual or other entity is contesting, in accordance with the procedure established by the appropriate Revenue Act, its liability for the tax or the amount of the tax. Making a false statement voids the contract and allows the Department to recover all amounts paid to the individual or entity under the contract in a civil action.
2. **Bid-Rigging or Bid Rotating.** The bidder or contractor or subcontractor, respectively, certifies that it is not barred from contracting with the Department by reason of a violation of either 720 ILCS 5/33E-3 or 720 ILCS 5/33E-4.

A violation of section 33E-3 would be represented by a conviction of the crime of bid-rigging which, in addition to Class 3 felony sentencing, provides that any person convicted of this offense, or any similar offense of any state or the United States which contains the same elements as this offense shall be barred for 5 years from the date of conviction from contracting with any unit of State or local government. No corporation shall be barred from contracting with any unit of State or local government as a result of a conviction under this Section of any employee or agent of such corporation if the employee so convicted is no longer employed by the corporation: (1) it has been finally adjudicated not guilty or (2) if it demonstrates to the governmental entity with which it seeks to contract that entity finds that the commission of the offense was neither authorized, requested, commanded, nor performed by a director, officer or a high managerial agent on behalf of the corporation.

A violation of Section 33E-4 would be represented by a conviction of the crime of bid-rotating which, in addition to Class 2 felony sentencing, provides that any person convicted of this offense or any similar offense of any state or the United States which contains the same elements as this offense shall be permanently barred from contracting with any unit of State of Local government. No corporation shall be barred from contracting with any unit of State or Local government as a result of a conviction under this Section of any employee or agent of such corporation if the employee so convicted is no longer employed by the corporation and: (1) it has been finally adjudicated not guilty or (2) if it demonstrates to the governmental entity with which it seeks to contract and that entity finds that the commission of the offense was neither authorized, requested, commanded, nor performed by a director, officer or a high managerial agent on behalf of the corporation.

3. **Bribery.** The bidder or contractor or subcontractor, respectively, certifies that, it has not been convicted of bribery or attempting to bribe an officer or employee of the State of Illinois or any unit of local government, nor has the firm made an admission of guilt of such conduct which is a matter of record, nor has an official, agent, or employee of the firm committed bribery or attempted bribery on behalf of the firm and pursuant to the direction or authorization of a responsible official of the firm.
4. **Interim Suspension or Suspension.** The bidder or contractor or subcontractor, respectively, certifies that it is not currently under a suspension as defined in Subpart I of Title 44 Subtitle A Chapter III Part 6 of the Illinois Administrative code. Furthermore, if suspended prior to completion of this work, the contract or contracts executed for the completion of this work may be canceled.

Local Public Agency	County	Section Number	Route(s) (Street/Road Name)
McHenry County D.O.T.	McHenry	21-00530-00-PP	16111 Nelson Road

SIGNATURES

(If an individual)

Signature of Bidder	Date	
Business Address		
City	State	Zip Code

(If a partnership)

Firm Name		
Signature	Date	
Title		
Business Address		
City	State	Zip Code

Insert the Names and Addresses of all Partners

(If a corporation)

Corporate Name		
Signature	Date	
Title		
Business Address		
City	State	Zip Code

Insert Names of Officers

President

Attest:

Secretary

Secretary

Treasurer



Local Public Agency	County	Section Number
McHenry County D.O.T.	McHenry	21-00530-00-PP

WE, _____ as PRINCIPAL, and _____ as SURETY, are held jointly,

severally and firmly bound unto the above Local Public Agency (hereafter referred to as "LPA") in the penal sum of 5% of the total bid price, or for the amount specified in the proposal documents in effect on the date of invitation for bids, whichever is the lesser sum. We bind ourselves, our heirs, executors, administrators, successors, and assigns, jointly pay to the LPA this sum under the conditions of this instrument.

WHEREAS THE CONDITION OF THE FOREGOING OBLIGATION IS SUCH that, the said PRINCIPAL is submitting a written proposal to the LPA acting through its awarding authority for the construction of the work designated as the above section.

THEREFORE if the proposal is accepted and a contract awarded to the PRINCIPAL by the LPA for the above designated section and the PRINCIPAL shall within fifteen (15) days after award enter into a formal contract, furnish surety guaranteeing the faithful performance of the work, and furnish evidence of the required insurance coverage, all as provided in the "Standard Specifications for Road and Bridge Construction" and applicable Supplemental Specifications, then this obligation shall become void; otherwise it shall remain in full force and effect.

IN THE EVENT the LPA determines the PRINCIPAL has failed to enter into a formal contract in compliance with any requirements set forth in the preceding paragraph, then the LPA acting through its awarding authority shall immediately be entitled to recover the full penal sum set out above, together with all court costs, all attorney fees, and any other expense of recovery.

IN TESTIMONY WHEREOF, the said PRINCIPAL and the said SURETY have caused this instrument to be signed by their respective officers this _____ Day of _____ Month and Year

Principal

Company Name

 Signature _____ Date _____
 By: _____
 Title

Company Name

 Signature _____ Date _____
 By: _____
 Title

(If Principal is a joint venture of two or more contractors, the company names, and authorized signatures of each contractor must be affixed.)

Surety

Name of Surety

Signature of Attorney-in-Fact _____ Date _____
 By: _____

STATE OF IL
COUNTY OF

I _____, a Notary Public in and for said county do hereby certify that

(Insert names of individuals signing on behalf of PRINCIPAL & SURETY)

who are each personally known to me to be the same persons whose names are subscribed to the foregoing instrument on behalf of PRINCIPAL and SURETY, appeared before me this day in person and acknowledged respectively, that they signed and delivered said instruments as their free and voluntary act for the uses and purposes therein set forth.

Given under my hand and notarial seal this _____ Day of _____ Month and Year

(SEAL)

Notary Public Signature

Date commission expires _____

Local Public Agency

County

Section Number

McHenry County D.O.T.

McHenry

21-00530-00-PP

ELECTRONIC BID BOND

Electronic bid bond is allowed (box must be checked by LPA if electronic bid bond is allowed)

The Principal may submit an electronic bid bond, in lieu of completing the above section of the Proposal Bid Bond Form. By providing an electronic bid bond ID code and signing below, the Principal is ensuring the identified electronic bid bond has been executed and the Principal and Surety are firmly bound unto the LPA under the conditions of the bid bond as shown above. (If PRINCIPAL is a joint venture of two or more contractors, an electronic bid bond ID code, company/Bidder name title and date must be affixed for each contractor in the venture.)

Electronic Bid Bond ID Code

Grid for Electronic Bid Bond ID Code (12 empty cells)

Company/Bidder Name

Empty box for Company/Bidder Name

Signature

Empty box for Signature

Date

Empty box for Date

Title

Empty box for Title



Local Public Agency	County	Street Name/Road Name	Section Number
McHenry County D.O.T.	McHenry	Ramer & Oak Grove Road	21-00530-00-PP

All contractors are required to complete the following certification

- For this contract proposal or for all bidding groups in this deliver and install proposal.
- For the following deliver and install bidding groups in this material proposal.

Illinois Department of Transportation policy, adopted in accordance with the provisions of the Illinois Highway Code, requires this contract to be awarded to the lowest responsive and responsible bidder. The award decision is subject to approval by the Department. In addition to all other responsibility factors, this contract or deliver and install proposal requires all bidders and all bidder's subcontractors to disclose participation in apprenticeship or training programs that are (1) approved by and registered with the United States Department of Labor's Bureau of Apprenticeship and Training, and (2) applicable to the work of the above indicated proposals or groups. Therefore, all bidders are required to complete the following certification:

1. Except as provided in paragraph 4 below, the undersigned bidder certifies that it is a participant, either as an individual or as part of a group program, in an approved apprenticeship or training program applicable to each type of work or craft that the bidder will perform with its own employees.
2. The undersigned bidder further certifies, for work to be performed by subcontract, that each of its subcontractors either (A) is, at the time of such bid, participating in an approved, applicable apprenticeship or training program; or (B) will, prior to commencement of performance of work pursuant to this contract, establish participation in an approved apprenticeship or training program applicable to the work of the subcontract.
3. The undersigned bidder, by inclusion in the list in the space below, certifies the official name of each program sponsor holding the Certificate of Registration for all of the types of work or crafts in which the bidder is a participant and that will be performed with the bidder's employees. Types of work or craft that will be subcontracted shall be included and listed as subcontract work. The list shall also indicate any type of work or craft job category for which there is no applicable apprenticeship or training program available.

4. Except for any work identified above, if any bidder or subcontractor shall perform all or part of the work of the contract or deliver and install proposal solely by individual owners, partners or members and not by employees to whom the payment of prevailing rates of wages would be required, check the following box, and identify the owner/operator workforces and positions of ownership.

The requirements of this certification and disclosure are a material part of the contract, and the contractor shall require this certification provision to be included in all approved subcontracts. The bidder is responsible for making a complete report and shall make certain that each type of work or craft job category that will be utilized on the project is accounted for and listed. The Department at any time before or afterward may require the production of a copy of each applicable Certificate of Registration issued by the United States Department of Labor evidencing such participation by the contractor and any or all of its subcontractors. In order to fulfill the participation requirement, it shall not be necessary that any applicable program sponsor be currently taking or that it will take applications for apprenticeship, training or employment during the performance of the work of this contract or deliver and install proposal.

Bidder	Signature	Date	
Title			
Address	City	State	Zip Code



Local Public Agency	County	Street Name/Road Name	Section Number
McHenry County D.O.T.	McHenry	Ramer & Oak Grove Road	21-00530-00-PP

I, _____ of _____, _____,
Name of Affiant City of Affiant State of Affiant

being first duly sworn upon oath, state as follows:

1. That I am the _____ of _____.
Officer or Position Bidder
2. That I have personal knowledge of the facts herein stated.
3. That, if selected under the proposal described above, _____, will maintain a business office in the
Bidder
 State of Illinois, which will be located in _____ County, Illinois.
County
4. That this business office will serve as the primary place of employment for any persons employed in the construction contemplated by this proposal.
5. That this Affidavit is given as a requirement of state law as provided in Section 30-22(8) of the Illinois Procurement Code.

Signature	Date
Print Name of Affiant	

Notary Public

State of IL
 County _____

Signed (or subscribed or attested) before me on _____ by _____
(date)

_____, authorized agent(s) of _____
(name/s of person/s)

Bidder

Signature of Notary Public

(SEAL)

My commission expires _____



Affidavit of Availability
For the Letting of 04/07/21



Bureau of Construction
2300 South Dirksen Parkway/Room 322
Springfield, IL 62764

Instructions: Complete this form by either typing or using black ink. "Authorization to Bid" will not be issued unless both sides of this form are completed in detail. Use additional forms as needed to list all work.

Part I. Work Under Contract

List below all work you have under contract as either a prime contractor or a subcontractor. It is required to include all pending low bids not yet awarded or rejected. In a joint venture, list only that portion of the work which is the responsibility of your company. The uncompleted dollar value is to be based upon the most recent engineer's or owners estimate, and must include work subcontracted to others. If no work is contracted, show NONE.

	1	2	3	4	Awards Pending	Accumulated Totals
Contract Number						
Contract With						
Estimated Completion Date						
Total Contract Price						
Uncompleted Dollar Value if Firm is the Prime Contractor						
Uncompleted Dollar Value if Firm is the Subcontractor						
Total Value of All Work						

Part II. Awards Pending and Uncompleted Work to be done with your own forces.

List below the uncompleted dollar value of work for each contract and awards pending to be completed with your own forces. All work subcontracted to others will be listed on the reverse of this form. In a joint venture, list only that portion of the work to be done by your company. If no work is contracted, show NONE.

Earthwork						
Portland Cement Concrete Paving						
HMA Plant Mix						
HMA Paving						
Clean & Seal Cracks/Joints						
Aggregate Bases, Surfaces						
Highway, R.R., Waterway Struc.						
Drainage						
Electrical						
Cover and Seal Coats						
Concrete Construction						
Landscaping						
Fencing						
Guardrail						
Painting						
Signing						
Cold Milling, Planning, Rotomilling						
Demolition						
Pavement Markings (Paint)						
Other Construction (List)						
Totals						

Disclosure of this information is REQUIRED to accomplish the statutory purpose as outlined in the "Illinois Procurement Code." Failure to comply will result in non-issuance of an "Authorization To Bid." This form has been approved by the State Forms Management Center.

Part III. Work Subcontracted to Others.

For each contract described in Part I, list all the work you have subcontracted to others.

	1	2	3	4	Awards Pending
Subcontractor					
Type of Work					
Subcontract Price					
Amount Uncompleted					
Subcontractor					
Type of Work					
Subcontract Price					
Amount Uncompleted					
Subcontractor					
Type of Work					
Subcontract Price					
Amount Uncompleted					
Subcontractor					
Type of Work					
Subcontract Price					
Amount Uncompleted					
Subcontractor					
Type of Work					
Subcontract Price					
Amount Uncompleted					
Total Uncompleted					

Notary

I, being duly sworn, do hereby declare this affidavit is a true and correct statement relating to ALL uncompleted contracts of the undersigned for Federal, State, County, City and private work, including ALL subcontract work, ALL pending low bids not yet awarded or rejected and ALL estimated completion dates.

Officer or Director

Title

Signature

Date

Company

Address

City

State

Zip Code

Subscribed and sworn to before me
this ____ day of _____, ____

(Signature of Notary Public)

My commission expires _____

(Notary Seal)

Add pages for additional contracts



Contract Number	District	Letting Date
	1	04/07/21
Route		County
Ramer & Oak Grove Road		McHenry
Project Number	Job Number	
Section Number		
21-00530-00-PP		

The Substance Abuse Prevention on Public Works Act, Public Act 95-0635, prohibits the use of drugs and alcohol, as defined in the Act, by employees of the Contractor and by employees of all approved Subcontractors while performing work on a public works project. The Contractor/Subcontractor herewith certifies that it has a superseding collective bargaining agreement or makes the public filing of its written substance abuse prevention program for the prevention of substance abuse among its employees who are not covered by a collective bargaining agreement dealing with the subject as mandated by the Act.

A. The undersigned representative of the Contractor/Subcontractor certifies that the contracting entity has signed collective bargaining agreements that are in effect for all of its employees, and that deal with the subject matter of Public Act 95-0635.

Contractor/Subcontractor

Name of Authorized Representative (type or print)

Title of Authorized Representative (type or print)

Signature of Authorized Representative

Date

B. The undersigned representative of the Contractor/Subcontractor certifies that the contracting entity has in place for all of its employees not covered by a collective bargaining agreement that deals with the subject of the Act, the attached substance abuse prevention program that meets or exceeds the requirements of Public Act 95-0635.

Contractor/Subcontractor

Name of Authorized Representative (type or print)

Title of Authorized Representative (type or print)

Signature of Authorized Representative

Date



Local Public Agency	County	Section Number
McHenry County D.O.T.	McHenry	21-00530-00-PP

The Following Recurring Special Provisions Indicated By An "X" Are Applicable To This Contract And Are Included By Reference:

Recurring Special Provisions

<u>Check Sheet #</u>		<u>Page No.</u>
1	<input type="checkbox"/> Additional State Requirements for Federal-Aid Construction Contracts	97
2	<input type="checkbox"/> Subletting of Contracts (Federal-Aid Contracts)	100
3	<input type="checkbox"/> EEO	101
4	<input type="checkbox"/> Specific EEO Responsibilities Non Federal-Aid Contracts	111
5	<input type="checkbox"/> Required Provisions - State Contracts	116
6	<input type="checkbox"/> Asbestos Bearing Pad Removal	122
7	<input type="checkbox"/> Asbestos Waterproofing Membrane and Asbestos HMA Surface Removal	123
8	<input type="checkbox"/> Temporary Stream Crossings and In-Stream Work Pads	124
9	<input type="checkbox"/> Construction Layout Stakes Except for Bridges	125
10	<input type="checkbox"/> Construction Layout Stakes	128
11	<input type="checkbox"/> Use of Geotextile Fabric for Railroad Crossing	131
12	<input type="checkbox"/> Subsealing of Concrete Pavements	133
13	<input type="checkbox"/> Hot-Mix Asphalt Surface Correction	137
14	<input type="checkbox"/> Pavement and Shoulder Resurfacing	139
15	<input type="checkbox"/> Patching with Hot-Mix Asphalt Overlay Removal	140
16	<input type="checkbox"/> Polymer Concrete	142
17	<input type="checkbox"/> PVC Pipeliner	144
18	<input type="checkbox"/> Bicycle Racks	145
19	<input type="checkbox"/> Temporary Portable Bridge Traffic Signals	147
20	Reserved	149
21	<input type="checkbox"/> Nighttime Inspection of Roadway Lighting	150
22	<input type="checkbox"/> English Substitution of Metric Bolts	151
23	<input type="checkbox"/> Calcium Chloride Accelerator for Portland Cement Concrete	152
24	<input type="checkbox"/> Quality Control of Concrete Mixtures at the Plant	153
25	<input type="checkbox"/> Quality Control/Quality Assurance of Concrete Mixtures	161
26	<input type="checkbox"/> Digital Terrain Modeling for Earthwork Calculations	177
27	Reserved	179
28	<input type="checkbox"/> Preventive Maintenance - Bituminous Surface Treatment (A-1)	180
29	Reserved	186
30	Reserved	187
31	Reserved	188
32	<input type="checkbox"/> Temporary Raised Pavement Markers	189
33	<input type="checkbox"/> Restoring Bridge Approach Pavements Using High-Density Foam	190
34	<input type="checkbox"/> Portland Cement Concrete Inlay or Overlay	193
35	<input type="checkbox"/> Portland Cement Concrete Partial Depth Hot-Mix Asphalt Patching	197
36	<input type="checkbox"/> Longitudinal Joint and Crack Patching	200
37	<input type="checkbox"/> Concrete Mix Design - Department Provided	202

Local Public Agency	County	Section Number
McHenry County D.O.T.	McHenry	21-00530-00-PP

The Following Local Roads And Streets Recurring Special Provisions Indicated By An "X" Are Applicable To This Contract And Are Included By Reference:

Local Roads And Streets Recurring Special Provisions

<u>Check Sheet #</u>		<u>Page No.</u>
LRS 1	Reserved	204
LRS 2	<input type="checkbox"/> Furnished Excavation	205
LRS 3	<input checked="" type="checkbox"/> Work Zone Traffic Control Surveillance	206
LRS 4	<input checked="" type="checkbox"/> Flaggers in Work Zones	207
LRS 5	<input checked="" type="checkbox"/> Contract Claims	208
LRS 6	<input checked="" type="checkbox"/> Bidding Requirements and Conditions for Contract Proposals	209
LRS 7	<input type="checkbox"/> Bidding Requirements and Conditions for Material Proposals	215
LRS 8	Reserved	221
LRS 9	<input type="checkbox"/> Bituminous Surface Treatments	222
LRS 10	Reserved	223
LRS 11	<input checked="" type="checkbox"/> Employment Practices	224
LRS 12	<input checked="" type="checkbox"/> Wages of Employees on Public Works	226
LRS 13	<input checked="" type="checkbox"/> Selection of Labor	228
LRS 14	<input type="checkbox"/> Paving Brick and Concrete Paver Pavements and Sidewalks	229
LRS 15	<input checked="" type="checkbox"/> Partial Payments	232
LRS 16	<input checked="" type="checkbox"/> Protests on Local Lettings	233
LRS 17	<input checked="" type="checkbox"/> Substance Abuse Prevention Program	234
LRS 18	<input type="checkbox"/> Multigrade Cold Mix Asphalt	235

CHECK SHEET #LRS3

State of Illinois
Department of Transportation
Bureau of Local Roads and Streets

SPECIAL PROVISION
FOR
WORK ZONE TRAFFIC CONTROL SURVEILLANCE

Effective: January 1, 1999
Revised: January 1, 2018

Revise Article 701.10 of the Standard Specifications to read:

"The Contractor shall conduct inspections of the worksite at a frequency that will allow for the timely replacement of any traffic control device that has become displaced, worn, or damaged. A sufficient quantity of replacement devices, based on vulnerability to damage, shall be readily available to meet this requirement."

Delete Article 701.20(g) of the Standard Specifications.

State of Illinois
Department of Transportation
Bureau of Local Roads and Streets

SPECIAL PROVISION
FOR
FLAGGERS IN WORK ZONES

Effective: January 1, 1999
Revised: January 1, 2007

Revise the last paragraph of Article 701.13 of the Standard Specifications to read:

“Flaggers are required only when workers are present.”

CHECK SHEET #LRS5

State of Illinois
Department of Transportation
Bureau of Local Roads and Streets

**SPECIAL PROVISION
FOR
CONTRACT CLAIMS**

Effective: January 1, 2002
Revised: January 1, 2007

Revise the second sentence of subparagraph (a) of Article 109.09 of the Standard Specifications to read:

"All claims shall be submitted to the Engineer."

Revise subparagraph (e) of Article 109.09 of the Standard Specifications to read:

"(e) Procedure. All Claims shall be submitted to the Engineer. The Engineer will consider all information submitted with the claim. Claims not conforming to this Article will be returned without consideration. The Engineer may schedule a claim presentation meeting if, in the Engineer's judgment, such a meeting would aid in resolution of the claim, otherwise a decision will be based on the claim documentation submitted. A final decision will be rendered within 90 days of receipt of the claim.

Full compliance by the Contractor with the provisions specified in this Article is a contractual condition precedent to the Contractor's right to seek relief in the Court of Claims. The Engineer's written decision shall be the final administrative action of the Department. Unless the Contractor files a claim for adjudication by the Court of Claims within 60 days after the date of the written decision, the failure to file shall constitute a release and waiver of the claim."

State of Illinois
Department of Transportation
Bureau of Local Roads and Streets

SPECIAL PROVISION
FOR
BIDDING REQUIREMENTS AND CONDITIONS FOR CONTRACT PROPOSALS

Effective: January 1, 2002
Revised: January 1, 2015

Replace Article 102.01 of the Standard Specifications with the following:

"Prequalification of Bidders. When prequalification is required and the Awarding Authority for contract construction work is the County Board of a County, the Council, the City Council, or the President and Board of Trustees of a city, village, or town, each prospective bidder, in evidence of competence, shall furnish the Awarding Authority as a prerequisite to the release of proposal forms by the Awarding Authority, a certified or photostatic copy of a "Certificate of Eligibility" issued by the Department of Transportation, according to the Department's "Prequalification Manual".

The two low bidders must file, within 24 hours after the letting, a sworn affidavit in triplicate, showing all uncompleted contracts awarded to them and all low bids pending award for Federal, State, County, Municipal and private work, using the blank form made available for this affidavit. One copy shall be filed with the Awarding Authority and two copies with IDOT's District office.

Issuance of Proposal Forms. The Awarding Authority reserves the right to refuse to issue a proposal form for bidding purposes for any of the following reasons:

- (a) Lack of competency and adequate machinery, plant, and other equipment, as revealed by the financial statement and experience questionnaires required in the prequalification procedures.
- (b) Uncompleted work which, in the judgment of the Awarding Authority, might hinder or prevent the prompt completion of additional work awarded.
- (c) False information provided on a bidder's "Affidavit of Availability".
- (d) Failure to pay, or satisfactorily settle, all bills due for labor and material on former contracts in force at the time of issuance of proposal forms.
- (e) Failure to comply with any prequalification regulations of the Department.
- (f) Default under previous contracts.
- (g) Unsatisfactory performance record as shown by past work for the Awarding Authority, judged from the standpoint of workmanship and progress.
- (h) When the Contractor is suspended from eligibility to bid at a public letting where the contract is awarded by, or requires approval of, the Department.

CHECK SHEET #LRS6

- (i) When any agent, servant, or employee of the prospective bidder currently serves as a member, employee, or agent of a governmental body that is financially involved in the proposal work.
- (j) When any agent, servant, or employee of the perspective bidder has participated in the preparation of plans or specifications for the proposed work.

Interpretation of Quantities in the Bid Schedule. The quantities appearing in the bid schedule are approximate and are prepared for the comparison of bids. Payment to the Contractor will be made only for the actual quantities of work performed and accepted or materials furnished according to the contract. The scheduled quantities of work to be done and materials to be furnished may be increased, decreased, or omitted as hereinafter provided.

Examination of Plans, Specifications, Special Provisions, and Site of Work. The bidder shall, before submitting a bid, carefully examine the provisions of the contract. The bidder shall inspect in detail the site of the proposed work, investigate and become familiar with all the local conditions affecting the contract and fully acquaint themselves with the detailed requirements of construction. Submission of a bid shall be a conclusive assurance and warranty the bidder has made these examinations and the bidder understands all requirements for the performance of the work. If his/her bid is accepted, the bidder shall be responsible for all errors in the proposal resulting from his/her failure or neglect to comply with these instructions. The Awarding Authority will, in no case, be responsible for any costs, expenses, losses, or change in anticipated profits resulting from such failure or neglect of the bidder to make these examinations.

The bidder shall take no advantage of any error or omission in the proposal and advertised contract. Any prospective bidder who desires an explanation or interpretation of the plans, specification, or any of the contract documents, shall request such in writing from the Awarding Authority, in sufficient time to allow a written reply by the Awarding Authority that can reach all prospective bidders before the submission of their bids. Any reply given a prospective bidder concerning any of the contract documents, plans, and specifications will be furnished to all prospective bidders in the form determined by the Awarding Authority including, but not limited to, an addendum, if the information is deemed by the Awarding Authority to be necessary in submitting bids or if the Awarding Authority concludes the information would aid competition. Oral explanations, interpretations, or instructions given before the submission of bids unless at a prebid conference will not be binding on the Awarding Authority.

Preparation of the Proposal. Bidders shall submit their proposals on the form furnished by the Awarding Authority. The proposal shall be executed properly, and bids shall be made for all items indicated in the proposal form, except when alternate bids are asked, a bid on more than one alternate for each item is not required, unless otherwise provided. The bidder shall indicate in figures, a unit price for each of the separate items called for in the proposal form; the bidder shall show the products of the respective quantities and unit prices in the column provided for that purpose, and the gross sum shown in the place indicated in the proposal form shall be the

CHECK SHEET #LRS6

summation of said products. All writing shall be with ink or typewriter, except the signature of the bidder which shall be written in ink.

If the proposal is made by an individual, that individual's name and business address shall be shown. If made by a firm or partnership, the name and business address of each member of the firm or partnership shall be shown. If made by a corporation, the proposal shall show the names, titles, and business addresses of the president, corporate secretary and treasurer. The proposal shall be signed by president or someone with authority to execute contracts and attested by the corporate secretary or someone with authority to execute or attest to the execution of contracts.

When prequalification is required, the proposal form shall be submitted by an authorized bidder in the same name and style as shown on the "Contractor's Statement of Experience and Financial Condition" used for prequalification.

Rejection of Proposals. The Awarding Authority reserves the right to reject any proposal for any of the conditions in "Issuance of Proposal Forms" or for any of the following reasons:

- (a) More than one proposal for the same work from an individual, firm, partnership, or corporation under the same name or different names.
- (b) Evidence of collusion among bidders.
- (c) Unbalanced proposals in which the bid prices for some items are, in the judgment of the Awarding Authority, out of proportion to the bid prices for other items.
- (d) If the proposal does not contain a unit price for each pay item listed, except in the case of authorized alternate pay items or lump sum pay items.
- (e) If the proposal form is other than that furnished by the Awarding Authority; or if the form is altered or any part thereof is detached.
- (f) If there are omissions, erasures, alterations, unauthorized additions, conditional or alternate bids, or irregularities of any kind which may tend to make the proposal incomplete, indefinite or ambiguous as to its meaning.
- (g) If the bidder adds any provisions reserving the right to accept or reject an award, or to enter into a contract pursuant to an award.
- (h) If the proposal is not accompanied by the proper proposal guaranty.
- (i) If the proposal is prepared with other than ink or typewriter, or otherwise fails to meet the requirements of the above "Preparation of Proposal" section.

Proposal Guaranty. Each proposal shall be accompanied by a bid bond on the Department form contained in the proposal, executed by a corporate surety company satisfactory to the Awarding Authority, by a bank cashier's check or a properly certified check for not less than five percent of the amount bid, or for the amount specified in the following schedule:

CHECK SHEET #LRS6

	<u>Amount Bid</u>	<u>Proposal Guaranty</u>
Up to	\$5,000	\$150
>\$5,000	\$10,000	\$300
>\$10,000	\$50,000	\$1,000
>\$50,000	\$100,000	\$3,000
>\$100,000	\$150,000	\$5,000
>\$150,000	\$250,000	\$7,500
>\$250,000	\$500,000	\$12,500
>\$500,000	\$1,000,000	\$25,000
>\$1,000,000	\$1,500,000	\$50,000
>\$1,500,000	\$2,000,000	\$75,000
>\$2,000,000	\$3,000,000	\$100,000
>\$3,000,000	\$5,000,000	\$150,000
>\$5,000,000	\$7,500,000	\$250,000
>\$7,500,000	\$10,000,000	\$400,000
>\$10,000,000	\$15,000,000	\$500,000
>\$15,000,000	\$20,000,000	\$600,000
>\$20,000,000	\$25,000,000	\$700,000
>\$25,000,000	\$30,000,000	\$800,000
>\$30,000,000	\$35,000,000	\$900,000
Over	\$35,000,000	\$1,000,000

In the event that one proposal guaranty check is intended to cover two or more proposals, the amount must equal to the sum of the proposal guaranties which would be required for each individual proposal.

Bank cashier's checks or properly certified checks accompanying proposals shall be made payable to the County Treasurer, when a County is the Awarding Authority; or the City, Village, or Town Treasurer, when a city, village, or town is the Awarding Authority.

The proposal guaranty checks of all, except the two lowest responsible, will be returned promptly after the proposals have been checked, tabulated, and the relation of the proposals established. Proposal guaranty checks of the two lowest bidders will be returned as soon as the contract and contract bond of the successful bidder have been properly executed and approved. Bid bonds will not be returned.

After a period of three working days has elapsed after the date of opening proposals, the Awarding Authority may permit the two lowest bidders to substitute for the bank cashier's checks or certified checks submitted with their proposals as proposal guaranties, bid bonds on the Department forms executed by corporate surety companies satisfactory to the Awarding Authority.

Delivery of Proposals. If a special envelope is supplied by the Awarding Authority, each proposal should be submitted in that envelope furnished by the Awarding Authority and the blank spaces on the envelope shall be filled in correctly to clearly indicate its contents. When an envelope other than the special one furnished by the Awarding Authority is used, it shall be marked to clearly indicate its contents. When sent by mail, the sealed proposal shall be addressed to the Awarding Authority at the address and in care of the official in whose office the bids are to be received. All proposals shall be filed prior to the time and at the place specified in the Notice to

CHECK SHEET #LRS6

Bidders. Proposals received after the time specified will be returned to the bidder unopened.

Withdrawal of Proposals. Permission will be given a bidder to withdraw a proposal if the bidder makes the request in writing or in person before the time for opening proposals.

Public Opening of Proposals. Proposals will be opened and read publicly at the time and place specified in the Notice to Bidders. Bidders, their authorized agents, and other interested parties are invited to be present.

Consideration of Proposals. After the proposals are opened and read, they will be compared on the basis of the summation of the products of the quantities shown in the bid schedule by the unit bid prices. In awarding contracts, the Awarding Authority will, in addition to considering the amounts stated in the proposals, take into consideration the responsibility of the various bidders as determined from a study of the data required under "Prequalification of Bidders", and from other investigations which it may elect to make.

The right is reserved to reject any or all proposals, to waive technicalities, or to advertise for new proposals, if in the judgment of the Awarding Authority, the best interests of the Awarding Authority will be promoted thereby.

Award of Contract. The award of contract will be made within 45 calendar days after the opening of proposals to the lowest responsible and qualified bidder whose proposal complies with all the requirements prescribed. The successful bidder will be notified by letter of intent that his/her bid has been accepted, and subject to the following conditions, the bidder will be the Contractor.

An approved contract executed by the Awarding Authority is required before the Awarding Authority is bound. An award may be cancelled any time by the Awarding Authority *prior to execution in order to protect the public interest and integrity of the bidding process* or for any other reason if, in the judgment of the Awarding Authority, the best interests of the Awarding Authority will be promoted thereby.

If a contract is not awarded within 45 days after the opening of proposals, bidders may file a written request with the Awarding Authority for the withdrawal of their bid, and the Awarding Authority will permit such withdrawal.

Requirement of Contract Bond. If the Awarding Authority requires a Contract Bond, the Contractor or Supplier shall furnish the Awarding Authority a performance and payment bond with good and sufficient sureties in the full amount of the contract as the penal sum. The surety shall be acceptable to the Awarding Authority, shall waive notice of any changes and extensions of time, and shall submit its bond on the form furnished by the Awarding Authority.

Execution of Contract. The contract shall be executed by the successful bidder and returned, together with the Contract Bond, within 15 days after the contract has been mailed to the bidder.

If the bidder to whom the award is made is a corporation organized under the laws of a State other than Illinois, the bidder shall furnish the Awarding Authority a

CHECK SHEET #LRS6

copy of the corporation's Certificate of Authority to do business in the State of Illinois with the return of the executed contract and bond. Failure to furnish such evidence of a Certificate of Authority within the time required will be considered as just cause for the annulment of the award and the forfeiture of the proposal guaranty to the Awarding Authority, not as a penalty, but in payment of liquidated damages sustained as a result of such failure.

Failure to Execute Contract. If the contract is not executed by the Awarding Authority within 15 days following receipt from the bidder of the properly executed contracts and bonds, the bidder shall have the right to withdraw his/her bid without penalty.

Failure of the successful bidder to execute the contract and file acceptable bonds within 15 days after the contract has been mailed to the bidder shall be just cause for the cancellation of the award and the forfeiture of the proposal guaranty which shall become the property of the Awarding Authority, not as penalty, but in liquidation of damages sustained. Award may then be made to the next lowest responsible bidder, or the work may be readvertised and constructed under contract, or otherwise, as the Awarding Authority may decide."

CHECK SHEET #LRS11

State of Illinois
Department of Transportation
Bureau of Local Roads and Streets

**SPECIAL PROVISION
FOR
EMPLOYMENT PRACTICES**

Effective: January 1, 1999

In addition to all other labor requirements set forth in this proposal and in the Standard Specifications for Road and Bridge Construction, adopted by the Department of Transportation, during the performance of this contract, the Contractor for itself, its assignees, and successors in interest (hereinafter referred to as the "Contractor") agrees as follows:

Selection of Labor. The Contractor shall comply with all Illinois statutes pertaining to the selection of labor.

Equal Employment Opportunity. During the performance of this contract, the Contractor agrees as follows:

- (a) That it will not discriminate against any employee or applicant for employment because of race, color, religion, sex, national origin, ancestry, age, marital status, physical or mental handicap or unfavorable discharge from military service, and further that it will examine all job classifications to determine if minority persons or women are underutilized and will take appropriate affirmative action to rectify any such underutilization.
- (b) That, if it hires additional employees in order to perform this contract or any portion hereof, it will determine the availability of minorities and women in the area(s) from which it may reasonably recruit and it will hire for each job classification for which employees are hired in such a way that minorities and women are not underutilized.
- (c) That, in all solicitations or advertisements for employees placed by it or on its behalf, it will state that all applicants will be afforded equal opportunity without discrimination because of race, color, religion, sex, national origin, ancestry, age, marital status, physical or mental handicap or unfavorable discharge from military service.

That it will send to each labor organization or representative of workers with which it has or is bound by collective bargaining or other agreement or understanding, a notice advising such labor organization or representative of the Contractor's obligations under the Illinois Human Rights Act and the Department's Rules and Regulations. If any such labor organization or representative fails or refuses to cooperate with the Contractor in its efforts to comply with so such Act and Rules and Regulations, the Contractor will promptly so notify the Illinois Department of Human Rights and the contracting agency and will recruit employees from other sources when necessary to fulfill its obligations thereunder.

CHECK SHEET #LRS11

- (e) That it will submit reports as required by the Department of Human Rights Rules and Regulations, furnish all relevant information as may from time to time be requested by the Department or the contracting agency, and in all respects comply with the Illinois Human Rights Act and the Department's Rules and Regulations.
- (f) That it will permit access to all relevant books, records, accounts and work sites by personnel of the contracting agency Illinois Department of Human Rights for purposes of investigation to ascertain compliance with the Illinois Human Rights Act and the Department's Rules and Regulations.
- (g) That it will include verbatim or by reference the provisions of this clause in every subcontract so that such provisions will be binding upon every such subcontractor. In the same manner as with other provisions of this contract, the Contractor will be liable for compliance with applicable provisions of this clause by all its subcontractors; and further it will promptly notify the contracting agency and the Illinois Department of Human Rights in the event any subcontractor fails or refuses to comply therewith. In addition, the Contractor will not utilize any subcontractor declared by the subcontracts with the State of Illinois or any of its political subdivisions or municipal corporations.

CHECK SHEET #LRS12

State of Illinois
Department of Transportation
Bureau of Local Roads and Streets

SPECIAL PROVISION FOR WAGES OF EMPLOYEES ON PUBLIC WORKS


Effective: January 1, 1999
Revised: January 1, 2015

1. **Prevailing Wages.** All wages paid by the Contractor and each subcontractor shall be in compliance with The Prevailing Wage Act (820 ILCS 130), as amended, except where a prevailing wage violates a federal law, order, or ruling, the rate conforming to the federal law, order, or ruling shall govern. The Illinois Department of Labor publishes the prevailing wage rates on its website. If the Illinois Department of Labor revises the prevailing wage rates, the revised prevailing wage rates on the Illinois Department of Labor's website shall apply to this contract and the Contractor will not be allowed additional compensation on account of said revisions. The Contractor shall review the wage rates applicable to the work of the contract at regular intervals in order to ensure the timely payment of current wage rates. The Contractor agrees that no additional notice is required. The Contractor shall be responsible to notify each subcontractor of the wage rates set forth in this contract and any revisions thereto.
2. **Payroll Records.** The Contractor and each subcontractor shall make and keep, for a period of not less than five years from the date of the last payment on a contract or subcontract, records of all laborers, mechanics, and other workers employed by them on the project; the records shall include information required by 820 ILCS 130/5 for each worker. Upon seven business days' notice, the Contractor and each subcontractor shall make available for inspection and copying at a location within this State during reasonable hours, the payroll records to the public body in charge of the project, its officers and agents, the Director of Labor and his deputies and agents, and to federal, State, or local law enforcement agencies and prosecutors.
3. **Submission of Payroll Records.** The Contractor and each subcontractor shall, no later than the 15th day of each calendar month, file a certified payroll for the immediately preceding month with the public body in charge of the project, except that the full social security number and home address shall not be included on weekly transmittals. Instead the payrolls shall include an identification number for each employee (e.g., the last four digits of the employee's social security number). The certified payroll shall consist of a complete copy of the payroll records, except starting and ending times of work each day may be omitted.

The certified payroll shall be accompanied by a statement signed by the Contractor or subcontractor or an officer, employee, or agent of the Contractor or subcontractor which avers that: (i) he or she has examined the certified payroll records required to be submitted by the Act and such records are true and accurate; (ii) the hourly rate paid to each worker is not less than the general

CHECK SHEET #LRS12

- prevailing rate of hourly wages required; and (iii) the Contractor or subcontractor is aware that filing a certified payroll that he or she knows to be false is a Class A misdemeanor.
4. *Employee Interviews.* The Contractor and each subcontractor shall permit his/her employees to be interviewed on the job, during working hours, by compliance investigators of the Department or the Department of Labor.

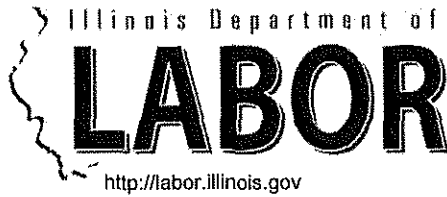

NEWS

JB Pritzker, Governor

Michael D. Kleinik, Director

FOR IMMEDIATE RELEASE

July 1, 2020

Contact:

Mike Matulis 217-785-1719

Michael.Matulis@illinois.gov

IDOL Alerts Local Officials on Hiring for Public Works Projects *State Law requires hiring Illinois workers during times of high unemployment*

SPRINGFIELD – Due to the high unemployment rate caused by the ongoing COVID-19 pandemic, the Employment of Illinois Workers on Public Works Act will take effect beginning July 1st. The state law requires the workforce on all public works projects to be comprised of a minimum of 90% Illinois residents.

The Illinois Department of Labor (IDOL) administers the Employment of Illinois Workers on Public Works Act, which was enacted to alleviate unemployment in Illinois by ensuring that most workers on public works projects live in the state. The requirement to employ 90 percent Illinois workers applies to all labor on public works projects or improvements, including projects involving the clean-up and on-site disposal of hazardous waste.

The law comes into effect following two consecutive months of a state unemployment rate above 5 percent. According to the U.S. Bureau of Labor Statistics, Illinois' unemployment rate during the COVID-19 pandemic increased from 4.2 percent in March, to 17.2 percent in April, and 15.2 percent in May. Given the unanticipated and large unemployment increase, IDOL wants to alert public bodies to the details of the law.

“As we all deal with the far-reaching impact of this pandemic, the Illinois Department of Labor wants to remind public officials and employers of the requirements of this law, which has not been triggered in recent years due to low unemployment,” said IDOL Director Michael Kleinik.

Illinois Attorney General Kwame Raoul pledged to work with IDOL to enforce the law.

“As the nation faces record levels of unemployment, the people of Illinois should be assured that government is using all available tools to put Illinois residents back to work,” Attorney General Kwame Raoul said. “The Employment of Illinois Workers on Public Works Act requires contractors on public works projects to prioritize Illinois workers, and my office stands ready to work with the Department of Labor to enforce the law and ensure that public works projects – which are funded by Illinois taxpayers – are completed using the best workforce in the country.”

The law is intended to ensure that projects funded using public dollars employ Illinois residents. That includes public works projects that are funded in whole or in part with state funds or funds administered by the state of Illinois. Any public works project financed in whole or in part by federal funds administered by the state of Illinois is covered under the provisions of this act to the extent permitted by applicable federal law or regulation.

More information about the Employment of Illinois Workers on Public Works Act can be found here:

<http://www.ilga.gov/legislation/ilcs/ilcs3.asp?ActID=549&ChapterID=7>



JB Pritzker, Governor

Michael D. Kleinik, Director

FOR IMMEDIATE RELEASE

May 11, 2020

Contact:

Mike Matulis 217-785-1719

Michael.Matulis@illinois.gov

IDOL Reminds Local Governments They No Longer Need to Approve Prevailing Wage Ordinances

SPRINGFIELD – The Illinois Department of Labor (IDOL) wants to remind local units of governments that while they still must pay prevailing wages for public works projects, a 2019 change in the law means they no longer need to adopt a prevailing wage ordinance or file it with IDOL.

“While most local governments are aware of the change, some continue to adopt prevailing wage ordinances and attempt to file them with the Illinois Department of Labor. That is no longer a requirement,” said IDOL Director Michael Kleinik.

The enactment of Public Act 100-1177, which took effect June 1, 2019, relieves local units of government from the former requirement of passing a prevailing wage ordinance, publishing it and filing it with the Illinois Department of Labor.

The prevailing wage schedules for each county in the state are now ascertained by IDOL and published on its website.

The changes to the Prevailing Wage Act also required IDOL to create an electronic database of certified payrolls where contractors will submit certified payrolls directly online rather than filing them with the local government.

Here is a link to the current prevailing wage rates for Illinois counties:

<https://www2.illinois.gov/idol/Laws-Rules/CONMED/Pages/Rates/2020/March-Rates.aspx>

McHenry County Prevailing Wage Rates posted on 3/15/2021

Trade Title	Rg	Type	C	Base	Foreman	Overtime				H/W	Pension	Vac	Trng	Other Ins
						M-F	Sa	Su	Hol					
ASBESTOS ABT-GEN	All	ALL		44.40	45.40	1.5	1.5	2.0	2.0	14.26	16.05	0.00	0.90	
ASBESTOS ABT-MEC	All	BLD		38.44	41.51	1.5	1.5	2.0	2.0	14.07	12.51	0.00	0.77	
BOILERMAKER	All	BLD		51.56	56.20	2.0	2.0	2.0	2.0	6.97	21.58	0.00	1.20	
BRICK MASON	All	BLD		47.56	52.32	1.5	1.5	2.0	2.0	11.20	20.51	0.00	0.97	
CARPENTER	All	ALL		49.76	51.76	1.5	1.5	2.0	2.0	11.79	23.35	0.00	0.73	
CEMENT MASON	All	ALL		48.20	50.20	2.0	1.5	2.0	2.0	10.90	23.86	0.00	0.50	
CERAMIC TILE FINISHER	All	BLD		41.80	41.80	1.5	1.5	2.0	2.0	11.25	13.41	0.00	0.88	
COMMUNICATION TECHNICIAN	All	BLD		42.41	44.81	1.5	1.5	2.0	2.0	13.79	15.42	0.00	0.85	
ELECTRIC PWR EQMT OP	All	ALL		44.61	60.87	1.5	1.5	2.0	2.0	6.50	12.49	0.00	1.01	1.34
ELECTRIC PWR GRNDMAN	All	ALL		34.27	60.87	1.5	1.5	2.0	2.0	6.50	9.60	0.00	0.77	1.03
ELECTRIC PWR LINEMAN	All	ALL		53.63	60.87	1.5	1.5	2.0	2.0	6.50	15.02	0.00	1.21	1.61
ELECTRIC PWR TRK DRV	All	ALL		35.52	60.87	1.5	1.5	2.0	2.0	6.50	9.95	0.00	0.80	1.07
ELECTRICIAN	All	ALL		51.16	55.56	1.5	2.0	2.0	2.0	15.66	18.52	0.00	1.15	
ELEVATOR CONSTRUCTOR	All	BLD		58.47	65.78	2.0	2.0	2.0	2.0	15.73	18.41	4.68	0.63	
FENCE ERECTOR	E	ALL		44.42	46.42	1.5	1.5	2.0	2.0	13.68	15.40	0.00	0.65	
FENCE ERECTOR	S	ALL		47.99	51.83	2.0	2.0	2.0	2.0	13.06	24.15	0.00	1.03	
GLAZIER	All	BLD		46.35	47.85	1.5	2.0	2.0	2.0	14.79	22.67	0.00	1.26	
HEAT/FROST INSULATOR	All	BLD		51.25	54.33	1.5	1.5	2.0	2.0	14.07	14.26	0.00	0.77	
IRON WORKER	E	ALL		52.51	54.51	2.0	2.0	2.0	2.0	15.15	24.34	0.00	0.44	
IRON WORKER	S	ALL		47.99	51.83	2.0	2.0	2.0	2.0	13.06	24.15	0.00	1.03	
IRON WORKER	W	ALL		40.85	45.75	2.0	2.0	2.0	2.0	12.66	28.22	0.00	1.55	
LABORER	All	ALL		44.40	45.15	1.5	1.5	2.0	2.0	14.26	16.05	0.00	0.90	
LATHER	All	ALL		49.76	51.76	1.5	1.5	2.0	2.0	11.79	23.35	0.00	0.73	
MACHINIST	All	BLD		49.68	52.18	1.5	1.5	2.0	2.0	7.93	8.95	1.85	1.47	
MARBLE FINISHER	All	ALL		35.73	49.05	1.5	1.5	2.0	2.0	11.20	18.71	0.00	0.87	
MARBLE MASON	All	BLD		46.71	51.38	1.5	1.5	2.0	2.0	11.20	19.98	0.00	0.95	
MATERIAL TESTER I	All	ALL		34.40		1.5	1.5	2.0	2.0	14.26	16.05	0.00	0.90	
MATERIALS TESTER II	All	ALL		39.40		1.5	1.5	2.0	2.0	14.26	16.05	0.00	0.90	
MILLWRIGHT	All	ALL		49.76	51.76	1.5	1.5	2.0	2.0	11.79	23.35	0.00	0.73	
OPERATING ENGINEER	All	BLD	1	52.10	56.10	2.0	2.0	2.0	2.0	20.90	17.85	2.00	2.15	
OPERATING ENGINEER	All	BLD	2	50.80	56.10	2.0	2.0	2.0	2.0	20.90	17.85	2.00	2.15	

OPERATING ENGINEER	All	BLD	3	48.25	56.10	2.0	2.0	2.0	2.0	20.90	17.85	2.00	2.15	
OPERATING ENGINEER	All	BLD	4	46.50	56.10	2.0	2.0	2.0	2.0	20.90	17.85	2.00	2.15	
OPERATING ENGINEER	All	BLD	5	55.85	56.10	2.0	2.0	2.0	2.0	20.90	17.85	2.00	2.15	
OPERATING ENGINEER	All	BLD	6	53.10	56.10	2.0	2.0	2.0	2.0	20.90	17.85	2.00	2.15	
OPERATING ENGINEER	All	BLD	7	55.10	56.10	2.0	2.0	2.0	2.0	20.90	17.85	2.00	2.15	
OPERATING ENGINEER	All	FLT		41.00	41.00	1.5	1.5	2.0	2.0	20.90	17.85	2.00	2.15	
OPERATING ENGINEER	All	HWY	1	50.30	54.30	1.5	1.5	2.0	2.0	20.90	17.85	2.00	2.15	
OPERATING ENGINEER	All	HWY	2	49.75	54.30	1.5	1.5	2.0	2.0	20.90	17.85	2.00	2.15	
OPERATING ENGINEER	All	HWY	3	47.70	54.30	1.5	1.5	2.0	2.0	20.90	17.85	2.00	2.15	
OPERATING ENGINEER	All	HWY	4	46.30	54.30	1.5	1.5	2.0	2.0	20.90	17.85	2.00	2.15	
OPERATING ENGINEER	All	HWY	5	45.10	54.30	1.5	1.5	2.0	2.0	20.90	17.85	2.00	2.15	
OPERATING ENGINEER	All	HWY	6	53.30	54.30	1.5	1.5	2.0	2.0	20.90	17.85	2.00	2.15	
OPERATING ENGINEER	All	HWY	7	51.30	54.30	1.5	1.5	2.0	2.0	20.90	17.85	2.00	2.15	
ORNAMENTAL IRON WORKER	E	ALL		51.63	54.13	2.0	2.0	2.0	2.0	14.23	22.25	0.00	1.25	
ORNAMENTAL IRON WORKER	S	ALL		47.99	51.83	2.0	2.0	2.0	2.0	13.06	24.15	0.00	1.03	
PAINTER	All	ALL		48.30	50.30	1.5	1.5	1.5	2.0	18.23	3.65	0.00	1.45	
PAINTER - SIGNS	All	BLD		40.74	45.75	1.5	1.5	2.0	2.0	3.04	3.90	0.00	0.00	
PILEDRIIVER	All	ALL		49.76	51.76	1.5	1.5	2.0	2.0	11.79	23.35	0.00	0.73	
PIPEFITTER	All	BLD		50.75	53.75	1.5	1.5	2.0	2.0	10.85	20.85	0.00	2.92	
PLASTERER	All	BLD		45.00	47.70	1.5	1.5	2.0	2.0	15.75	18.14	0.00	1.25	
PLUMBER	All	BLD		52.00	55.10	1.5	1.5	2.0	2.0	16.22	15.60	0.00	1.40	
ROOFER	All	BLD		45.75	49.75	1.5	1.5	2.0	2.0	11.23	13.61	0.00	0.91	
SHEETMETAL WORKER	All	BLD		50.33	52.85	1.5	1.5	2.0	2.0	11.00	18.46	0.00	1.29	2.39
SIGN HANGER	All	BLD		26.07	27.57	1.5	1.5	2.0	2.0	3.80	3.55	0.00	0.00	
SPRINKLER FITTER	All	BLD		51.75	54.50	1.5	1.5	2.0	2.0	13.90	17.00	0.00	0.75	
STEEL ERECTOR	E	ALL		52.51	54.51	2.0	2.0	2.0	2.0	15.15	24.34	0.00	0.44	
STEEL ERECTOR	S	ALL		47.99	51.83	2.0	2.0	2.0	2.0	13.06	24.15	0.00	1.03	
STONE MASON	All	BLD		47.56	52.32	1.5	1.5	2.0	2.0	11.20	20.51	0.00	0.97	
TERRAZZO FINISHER	All	BLD		43.54	43.54	1.5	1.5	2.0	2.0	11.25	15.61	0.00	0.90	
TERRAZZO MASON	All	BLD		47.38	50.88	1.5	1.5	2.0	2.0	11.25	17.07	0.00	0.94	
TILE MASON	All	BLD		48.75	52.75	1.5	1.5	2.0	2.0	11.25	16.90	0.00	0.95	
TRAFFIC SAFETY WORKER	All	HWY		36.75	38.35	1.5	1.5	2.0	2.0	7.95	8.20	0.00	0.75	
TRUCK DRIVER	All	ALL	1	40.29	40.84	1.5	1.5	2.0	2.0	11.00	10.25	0.00	0.15	
TRUCK DRIVER	All	ALL	2	40.44	40.84	1.5	1.5	2.0	2.0	11.00	10.25	0.00	0.15	
TRUCK DRIVER	All	ALL	3	40.64	40.84	1.5	1.5	2.0	2.0	11.00	10.25	0.00	0.15	
TRUCK DRIVER	All	ALL	4	40.84	40.84	1.5	1.5	2.0	2.0	11.00	10.25	0.00	0.15	

TUCKPOINTER	All	BLD	47.25	48.25	1.5	1.5	2.0	2.0	8.59	19.48	0.00	0.94
-------------	-----	-----	-------	-------	-----	-----	-----	-----	------	-------	------	------

- Legend**
- Rg** Region
 - Type** Trade Type - All,Highway,Building,Floating,Oil & Chip,Rivers
 - C** Class
 - Base** Base Wage Rate
 - OT M-F** Unless otherwise noted, OT pay is required for any hour greater than 8 worked each day, Mon through Fri. The number listed is the multiple of the base wage.
 - OT Sa** Overtime pay required for every hour worked on Saturdays
 - OT Su** Overtime pay required for every hour worked on Sundays
 - OT Hol** Overtime pay required for every hour worked on Holidays
 - H/W** Health/Welfare benefit
 - Vac** Vacation
 - Trng** Training
 - Other Ins** Employer hourly cost for any other type(s) of insurance provided for benefit of worker.

Explanations MCHENRY COUNTY

FENCE ERECTOR (EAST) - That part of the county East and Northeast of a line following Route 31 North to Route 14, northwest to Route 47 north to the Wisconsin State Line.

IRONWORKERS (EAST) - That part of the county East of Rts. 47 and 14.

IRONWORKERS (SOUTH) - That part of the county South of Route 14 and East of Route 47.

IRONWORKERS (WEST) - That part of the county West of Route 47.

The following list is considered as those days for which holiday rates of wages for work performed apply: New Years Day, Memorial Day, Fourth of July, Labor Day, Thanksgiving Day, Christmas Day and Veterans Day in some classifications/counties. Generally, any of these holidays which fall on a Sunday is celebrated on the following Monday. This then makes work performed on that Monday payable at the appropriate overtime rate for holiday pay. Common practice in a given local may alter certain days of celebration. If in doubt, please check with IDOL.

EXPLANATION OF CLASSES

ASBESTOS - GENERAL - removal of asbestos material/mold and hazardous materials from any place in a building, including mechanical systems where those mechanical systems are to be removed. This includes the removal of asbestos materials/mold and hazardous materials from ductwork or pipes in a building when the building is to be demolished at the time or at some close future date.

ASBESTOS - MECHANICAL - removal of asbestos material from mechanical systems, such as pipes, ducts, and boilers, where the mechanical systems are to remain.

CERAMIC TILE FINISHER

The grouting, cleaning, and polishing of all classes of tile, whether for interior or exterior purposes, all burned, glazed or unglazed products; all composition materials, granite tiles, warning detectable tiles, cement tiles, epoxy composite materials, pavers, glass, mosaics, fiberglass, and all substitute materials, for tile made in tile-like units; all mixtures in tile like form of cement, metals, and

other materials that are for and intended for use as a finished floor surface, stair treads, promenade roofs, walks, walls, ceilings, swimming pools, and all other places where tile is to form a finished interior or exterior. The mixing of all setting mortars including but not limited to thin-set mortars, epoxies, wall mud, and any other sand and cement mixtures or adhesives when used in the preparation, installation, repair, or maintenance of tile and/or similar materials. The handling and unloading of all sand, cement, lime, tile, fixtures, equipment, adhesives, or any other materials to be used in the preparation, installation, repair, or maintenance of tile and/or similar materials. Ceramic Tile Finishers shall fill all joints and voids regardless of method on all tile work, particularly and especially after installation of said tile work. Application of any and all protective coverings to all types of tile installations including, but not be limited to, all soap compounds, paper products, tapes, and all polyethylene coverings, plywood, masonite, cardboard, and any new type of products that may be used to protect tile installations, Blastrac equipment, and all floor scarifying equipment used in preparing floors to receive tile. The clean up and removal of all waste and materials. All demolition of existing tile floors and walls to be re-tiled.

COMMUNICATIONS TECHNICIAN

Construction, installation, maintenance and removal of telecommunication facilities (voice, sound, data and video), telephone, security systems, fire alarm systems that are a component of a multiplex system and share a common cable, and data inside wire, interconnect, terminal equipment, central offices, PABX and equipment, micro waves, V-SAT, bypass, CATV, WAN (wide area network), LAN (local area networks), and ISDN (integrated system digital network), pulling of wire in raceways, but not the installation of raceways.

MARBLE FINISHER

Loading and unloading trucks, distribution of all materials (all stone, sand, etc.), stocking of floors with material, performing all rigging for heavy work, the handling of all material that may be needed for the installation of such materials, building of scaffolding, polishing if needed, patching, waxing of material if damaged, pointing up, caulking, grouting and cleaning of marble, holding water on diamond or Carborundum blade or saw for setters cutting, use of tub saw or any other saw needed for preparation of material, drilling of holes for wires that anchor material set by setters, mixing up of molding plaster for installation of material, mixing up thin set for the installation of material, mixing up of sand to cement for the installation of material and such other work as may be required in helping a Marble Setter in the handling of all material in the erection or installation of interior marble, slate, travertine, art marble, serpentine, alberene stone, blue stone, granite and other stones (meaning as to stone any foreign or domestic materials as are specified and used in building interiors and exteriors and customarily known as stone in the trade), carrara, sanionyx, vitrolite and similar opaque glass and the laying of all marble tile, terrazzo tile, slate tile and precast tile, steps, risers treads, base, or any other materials that may be used as substitutes for any of the aforementioned materials and which are used on interior and exterior which are installed in a similar manner.

MATERIAL TESTER I: Hand coring and drilling for testing of materials; field inspection of uncured concrete and asphalt.

MATERIAL TESTER II: Field inspection of welds, structural steel, fireproofing, masonry, soil, facade, reinforcing steel, formwork, cured concrete, and concrete and asphalt batch plants; adjusting proportions of bituminous mixtures.

OPERATING ENGINEER - BUILDING

Class 1. Asphalt Plant; Asphalt Spreader; Autograde; Backhoes with Caisson Attachment; Batch Plant; Benoto (requires Two Engineers); Boiler and Throttle Valve; Caisson Rigs; Central Redi-Mix Plant; Combination Back Hoe Front End-loader Machine; Compressor and Throttle Valve; Concrete Breaker (Truck Mounted); Concrete Conveyor; Concrete Conveyor (Truck Mounted); Concrete Paver Over 27E cu. ft; Concrete Paver 27E cu. ft. and Under; Concrete Placer; Concrete Placing Boom; Concrete Pump (Truck Mounted); Concrete Tower; Cranes, All; Cranes, Hammerhead; Cranes, (GCI and similar Type); Creter Crane; Spider Crane; Crusher, Stone, etc.; Derricks, All; Derricks, Traveling; Formless Curb and Gutter Machine; Grader, Elevating; Grouting Machines; Heavy Duty Self-Propelled Transporter or Prime Mover; Highlift Shovels or Front Endloader 2-1/4 yd. and over; Hoists, Elevators, outside type rack and pinion and similar machines; Hoists, One, Two and Three Drum; Hoists, Two Tugger One Floor; Hydraulic

Backhoes; Hydraulic Boom Trucks; Hydro Vac (and similar equipment); Locomotives, All; Motor Patrol; Lubrication Technician; Manipulators; Pile Drivers and Skid Rig; Post Hole Digger; Pre-Stress Machine; Pump Cretes Dual Ram; Pump Cretes: Squeeze Cretes-Screw Type Pumps; Gypsum Bulker and Pump; Raised and Blind Hole Drill; Roto Mill Grinder; Scoops - Tractor Drawn; Slip-Form Paver; Straddle Buggies; Operation of Tie Back Machine; Tournapull; Tractor with Boom and Side Boom; Trenching Machines.

Class 2. Boilers; Broom, All Power Propelled; Bulldozers; Concrete Mixer (Two Bag and Over); Conveyor, Portable; Forklift Trucks; Highlift Shovels or Front Endloaders under 2-1/4 yd.; Hoists, Automatic; Hoists, Inside Elevators; Hoists, Sewer Dragging Machine; Hoists, Tugger Single Drum; Laser Screed; Rock Drill (Self-Propelled); Rock Drill (Truck Mounted); Rollers, All; Steam Generators; Tractors, All; Tractor Drawn Vibratory Roller; Winch Trucks with "A" Frame.

Class 3. Air Compressor; Combination Small Equipment Operator; Generators; Heaters, Mechanical; Hoists, Inside Elevators (remodeling or renovation work); Hydraulic Power Units (Pile Driving, Extracting, and Drilling); Pumps, over 3" (1 to 3 not to exceed a total of 300 ft.); Low Boys; Pumps, Well Points; Welding Machines (2 through 5); Winches, 4 Small Electric Drill Winches.

Class 4. Bobcats and/or other Skid Steer Loaders; Oilers; and Brick Forklift.

Class 5. Assistant Craft Foreman.

Class 6. Gradall.

Class 7. Mechanics; Welders.

OPERATING ENGINEERS - HIGHWAY CONSTRUCTION

Class 1. Asphalt Plant; Asphalt Heater and Planer Combination; Asphalt Heater Scarfire; Asphalt Spreader; Autograder/GOMACO or other similar type machines; ABG Paver; Backhoes with Caisson Attachment; Ballast Regulator; Belt Loader; Caisson Rigs; Car Dumper; Central Redi-Mix Plant; Combination Backhoe Front Endloader Machine, (1 cu. yd. Backhoe Bucket or over or with attachments); Concrete Breaker (Truck Mounted); Concrete Conveyor; Concrete Paver over 27E cu. ft.; Concrete Placer; Concrete Tube Float; Cranes, all attachments; Cranes, Tower Cranes of all types: Creter Crane: Spider Crane; Crusher, Stone, etc.; Derricks, All; Derrick Boats; Derricks, Traveling; Dredges; Elevators, Outside type Rack & Pinion and Similar Machines; Formless Curb and Gutter Machine; Grader, Elevating; Grader, Motor Grader, Motor Patrol, Auto Patrol, Form Grader, Pull Grader, Subgrader; Guard Rail Post Driver Truck Mounted; Hoists, One, Two and Three Drum; Heavy Duty Self-Propelled Transporter or Prime Mover; Hydraulic Backhoes; Backhoes with shear attachments up to 40' of boom reach; Lubrication Technician; Manipulators; Mucking Machine; Pile Drivers and Skid Rig; Pre-Stress Machine; Pump Cretes Dual Ram; Rock Drill - Crawler or Skid Rig; Rock Drill - Truck Mounted; Rock/Track Tamper; Roto Mill Grinder; Slip-Form Paver; Snow Melters; Soil Test Drill Rig (Truck Mounted); Straddle Buggies; Hydraulic Telescoping Form (Tunnel); Operation of Tieback Machine; Tractor Drawn Belt Loader; Tractor Drawn Belt Loader (with attached pusher - two engineers); Tractor with Boom; Tractaire with Attachments; Traffic Barrier Transfer Machine; Trenching; Truck Mounted Concrete Pump with Boom; Raised or Blind Hole Drills (Tunnel Shaft); Underground Boring and/or Mining Machines 5 ft. in diameter and over tunnel, etc; Underground Boring and/or Mining Machines under 5 ft. in diameter; Wheel Excavator; Widener (APSCO).

Class 2. Batch Plant; Bituminous Mixer; Boiler and Throttle Valve; Bulldozers; Car Loader Trailing Conveyors; Combination Backhoe Front Endloader Machine (Less than 1 cu. yd. Backhoe Bucket or over or with attachments); Compressor and Throttle Valve; Compressor, Common Receiver (3); Concrete Breaker or Hydro Hammer; Concrete Grinding Machine; Concrete Mixer or Paver 7S Series to and including 27 cu. ft.; Concrete Spreader; Concrete Curing Machine, Burlap Machine, Belting Machine and Sealing Machine; Concrete Wheel Saw; Conveyor Muck Cars (Haglund or Similar Type); Drills, All; Finishing Machine - Concrete; Highlift Shovels or Front Endloader; Hoist - Sewer Dragging Machine; Hydraulic Boom Trucks (All Attachments); Hydro-Blaster; Hydro Excavating (excluding hose work); Laser Screed; All Locomotives, Dinky; Off-Road Hauling Units (including articulating) Non Self-Loading Ejection Dump; Pump Cretes: Squeeze Cretes - Screw Type Pumps, Gypsum Bulker and Pump; Roller, Asphalt; Rotary

Snow Plows; Rototiller, Seaman, etc., self-propelled; Self-Propelled Compactor; Spreader - Chip - Stone, etc.; Scraper - Single/Twin Engine/Push and Pull; Scraper - Prime Mover in Tandem (Regardless of Size); Tractors pulling attachments, Sheeps Foot, Disc, Compactor, etc.; Tug Boats.

Class 3. Boilers; Brooms, All Power Propelled; Cement Supply Tender; Compressor, Common Receiver (2); Concrete Mixer (Two Bag and Over); Conveyor, Portable; Farm-Type Tractors Used for Mowing, Seeding, etc.; Forklift Trucks; Grouting Machine; Hoists, Automatic; Hoists, All Elevators; Hoists, Tugger Single Drum; Jeep Diggers; Low Boys; Pipe Jacking Machines; Post-Hole Digger; Power Saw, Concrete Power Driven; Pug Mills; Rollers, other than Asphalt; Seed and Straw Blower; Steam Generators; Stump Machine; Winch Trucks with "A" Frame; Work Boats; Tamper-Form-Motor Driven.

Class 4. Air Compressor; Combination - Small Equipment Operator; Directional Boring Machine; Generators; Heaters, Mechanical; Hydraulic Power Unit (Pile Driving, Extracting, or Drilling); Light Plants, All (1 through 5); Pumps, over 3" (1 to 3 not to exceed a total of 300 ft.); Pumps, Well Points; Vacuum Trucks (excluding hose work); Welding Machines (2 through 5); Winches, 4 Small Electric Drill Winches.

Class 5. SkidSteer Loader (all); Brick Forklifts; Oilers.

Class 6. Field Mechanics and Field Welders

Class 7. Dowell Machine with Air Compressor; Gradall and machines of like nature.

OPERATING ENGINEERS - FLOATING

Diver. Diver Wet Tender, Diver Tender, ROV Pilot, ROV Tender

TRAFFIC SAFETY - Effective November 30, 2018, the description of the traffic safety worker trade in this County is as follows: Work associated with barricades, horses and drums used to reduce lane usage on highway work, the installation and removal of temporary, non-temporary or permanent lane, pavement or roadway markings, and the installation and removal of temporary road signs.

TRUCK DRIVER - BUILDING, HEAVY AND HIGHWAY CONSTRUCTION

Class 1. Two or three Axle Trucks. A-frame Truck when used for transportation purposes; Air Compressors and Welding Machines, including those pulled by cars, pick-up trucks and tractors; Ambulances; Batch Gate Lockers; Batch Hopperman; Car and Truck Washers; Carry-alls; Fork Lifts and Hoisters; Helpers; Mechanics Helpers and Greasers; Oil Distributors 2-man operation; Pavement Breakers; Pole Trailer, up to 40 feet; Power Mower Tractors; Self-propelled Chip Spreader; Skipman; Slurry Trucks, 2-man operation; Slurry Truck Conveyor Operation, 2 or 3 man; Teamsters; Unskilled Dumpman; and Truck Drivers hauling warning lights, barricades, and portable toilets on the job site.

Class 2. Four axle trucks; Dump Crets and Adgetors under 7 yards; Dumpsters, Track Trucks, Euclids, Hug Bottom Dump Turnapulls or Turnatrailers when pulling other than self-loading equipment or similar equipment under 16 cubic yards; Mixer Trucks under 7 yards; Ready-mix Plant Hopper Operator, and Winch Trucks, 2 Axles.

Class 3. Five axle trucks; Dump Crets and Adgetors 7 yards and over; Dumpsters, Track Trucks, Euclids, Hug Bottom Dump Turnatrailers or turnapulls when pulling other than self-loading equipment or similar equipment over 16 cubic yards; Explosives and/or Fission Material Trucks; Mixer Trucks 7 yards or over; Mobile Cranes while in transit; Oil Distributors, 1-man operation; Pole Trailer, over 40 feet; Pole and Expandable Trailers hauling material over 50 feet long; Slurry trucks, 1-man operation; Winch trucks, 3 axles or more; Mechanic--Truck Welder and Truck Painter.

Class 4. Six axle trucks; Dual-purpose vehicles, such as mounted crane trucks with hoist and accessories; Foreman; Master Mechanic; Self-loading equipment like P.B. and trucks with scoops on the front.

TERRAZZO FINISHER

The handling of sand, cement, marble chips, and all other materials that may be used by the Mosaic Terrazzo Mechanic, and the mixing, grinding, grouting, cleaning and sealing of all Marble, Mosaic, and Terrazzo work, floors, base, stairs, and wainscoting by hand or machine, and in addition, assisting and aiding Marble, Masonic, and Terrazzo Mechanics.

Other Classifications of Work:

For definitions of classifications not otherwise set out, the Department generally has on file such definitions which are available. If a task to be performed is not subject to one of the classifications of pay set out, the Department will upon being contacted state which neighboring county has such a classification and provide such rate, such rate being deemed to exist by reference in this document. If no neighboring county rate applies to the task, the Department shall undertake a special determination, such special determination being then deemed to have existed under this determination. If a project requires these, or any classification not listed, please contact IDOL at 217-782-1710 for wage rates or clarifications.

LANDSCAPING

Landscaping work falls under the existing classifications for laborer, operating engineer and truck driver. The work performed by landscape plantsman and landscape laborer is covered by the existing classification of laborer. The work performed by landscape operators (regardless of equipment used or its size) is covered by the classifications of operating engineer. The work performed by landscape truck drivers (regardless of size of truck driven) is covered by the classifications of truck driver.

MATERIAL TESTER & MATERIAL TESTER/INSPECTOR I AND II

Notwithstanding the difference in the classification title, the classification entitled "Material Tester I" involves the same job duties as the classification entitled "Material Tester/Inspector I". Likewise, the classification entitled "Material Tester II" involves the same job duties as the classification entitled "Material Tester/Inspector II".

CHECK SHEET #LRS13

State of Illinois
Department of Transportation
Bureau of Local Roads and Streets

**SPECIAL PROVISION
FOR
SELECTION OF LABOR**

Effective: January 1, 1999
Revised: January 1, 2012

The Contractor shall comply with all Illinois statutes pertaining to the selection of labor.

Employment of Illinois Workers During Periods of Excessive Unemployment. Whenever there is a period of excessive unemployment in Illinois, which is defined herein as any month immediately following two consecutive calendar months during which the level of unemployment in the State of Illinois has exceeded five percent as measured by the United States Bureau of Labor Statistics in its monthly publication of employment and unemployment figures, the Contractor shall employ at least 90 percent Illinois laborers. "Illinois laborer" means any person who has resided in Illinois for at least 30 days and intends to become or remain an Illinois resident.

Other laborers may be used when Illinois laborers as defined herein are not available, or are incapable of performing the particular type of work involved, if so certified by the Contractor and approved by the Engineer. The Contractor may place no more than three of his regularly employed non-resident executive and technical experts, who do not qualify as Illinois laborers, to do work encompassed by this Contract during a period of excessive unemployment.

This provision applies to all labor, whether skilled, semi-skilled or unskilled, whether manual or non-manual.

CHECK SHEET #LRS15

State of Illinois
Department of Transportation

**SPECIAL PROVISION
FOR
PARTIAL PAYMENTS**

Effective: January 1, 2007

Add the following after the first paragraph of Article 109.07(a) of the Standard Specifications:

“The State will deduct from the amount so determined for the first 50 percent of the completed work a sum of ten percent to be retained until after the completion of the entire work to the satisfaction of the Engineer. After 50 percent or more of the work is completed, the Engineer may, at his/her discretion, certify the remaining partial payments without any further retention, provided that satisfactory progress is being made, and provided that the amount retained is not less than five percent of the total adjusted contract price. When the principal items of the work have been satisfactorily completed, a semi-final estimate may be made with the consent of the surety. Payment to the Contractor under such an estimate shall not exceed 90 percent of the amount retained after making partial payments, but in no event shall the amount retained after making the semi-final payment be less than one percent of the adjusted contract price, nor less than \$500.00.

When any payment is made directly to the State, payments for completed work shall have deducted the proportionate share of the cost to be borne by the State. The deduction will be the estimated cost to the State divided by the awarded contract value with this percentage applied to the value of work in place. Any adjustment to be made because of changed quantities will be made when the final payment is being processed. No retainage will be held from the value of such payments.”

State of Illinois
Department of Transportation
Bureau of Local Roads and Streets

**SPECIAL PROVISION
FOR
PROTESTS ON LOCAL LETTINGS**

Effective: January 1, 2007
Revised: January 1, 2013

Except for apprenticeship and training certification issues, all protests shall be handled according to Sections 6.390 through 6.440 of Title 44 Subtitle A Chapter III Part 6 of the Illinois Administrative Code. For the purpose of a protest under this special provision, a representative of the awarding local authority executing the contract will perform the functions of the Chief Procurement Officer (CPO) and the State Purchasing Officer (SPO).

CHECK SHEET #LRS17

State of Illinois
Department of Transportation
Bureau of Local Roads and Streets

**SPECIAL PROVISION
FOR
SUBSTANCE ABUSE PREVENTION PROGRAM**

Effective: January 1, 2008
Revised: January 1, 2014

In addition to all other labor requirements set forth in this proposal and in the Standard Specification for Road and Bridge Construction, adopted by the Department, during the performance of this contract, the Contractor for itself, its assignees, and successors in interest (hereinafter referred to as the "Contractor") agrees as follows:

Substance Abuse Prevention Program. Before the Contractor and any subcontractor commences work, the Contractor and any subcontractor shall have in place a written Substance Abuse Prevention Program for the prevention of substance abuse among its employees which meets or exceeds the requirements in 820 ILCS 265 or shall have a collective bargaining agreement in effect dealing with the subject matter of 820 ILCS 265.

The Contractor and any subcontractor shall file with the public body engaged in the construction of the public works: a copy of the Substance Abuse Prevention Program along with a cover letter certifying that their program meets the requirements of the Act, or a letter certifying that the Contractor or a subcontractor has a collective bargaining agreement in effect dealing with the subject matter of this Act.

State of Illinois
Department of Transportation
Bureau of Local Roads and Streets

SPECIAL PROVISION
FOR
INSURANCE

Effective: February 1, 2007
Revised: August 1, 2007

All references to Sections or Articles in this specification shall be construed to mean specific *Section or Article of the Standard Specifications for Road and Bridge Construction*, adopted by the Department of Transportation.

The Contractor shall name the following entities as additional insured under the Contractor's general liability insurance policy in accordance with Article 107.27:

McHerny County D.O.T.

The entities listed above and their officers, employees, and agents shall be indemnified and held harmless in accordance with Article 107.26.

BDE SPECIAL PROVISIONS
For the January 17, 2020 and March 6, 2020 Lettings

The following special provisions indicated by a "check mark" are applicable to this contract and will be included by the Project Coordination and Implementation Section of the BD&E. An * indicates a new or revised special provision for the letting.

File Name	#		Special Provision Title	Effective	Revised
80099	1	<input type="checkbox"/>	Accessible Pedestrian Signals (APS)	April 1, 2003	Jan. 1, 2014
80274	2	<input type="checkbox"/>	Aggregate Subgrade Improvement	April 1, 2012	April 1, 2016
80192	3	<input type="checkbox"/>	Automated Flagger Assistance Device	Jan. 1, 2008	
80173	4	<input type="checkbox"/>	Bituminous Materials Cost Adjustments	Nov. 2, 2006	Aug. 1, 2017
* 80426	5	<input type="checkbox"/>	Bituminous Surface Treatment with Fog Seal	Jan. 1, 2020	
80241	6	<input type="checkbox"/>	Bridge Demolition Debris	July 1, 2009	
50261	7	<input type="checkbox"/>	Building Removal-Case I (Non-Friable and Friable Asbestos)	Sept. 1, 1990	April 1, 2010
50481	8	<input type="checkbox"/>	Building Removal-Case II (Non-Friable Asbestos)	Sept. 1, 1990	April 1, 2010
50491	9	<input type="checkbox"/>	Building Removal-Case III (Friable Asbestos)	Sept. 1, 1990	April 1, 2010
50531	10	<input type="checkbox"/>	Building Removal-Case IV (No Asbestos)	Sept. 1, 1990	April 1, 2010
* 80425	11	<input type="checkbox"/>	Cape Seal	Jan. 1, 2020	
80384	12	<input type="checkbox"/>	Compensable Delay Costs	June 2, 2017	April 1, 2019
80198	13	<input type="checkbox"/>	Completion Date (via calendar days)	April 1, 2008	
80199	14	<input type="checkbox"/>	Completion Date (via calendar days) Plus Working Days	April 1, 2008	
80293	15	<input type="checkbox"/>	Concrete Box Culverts with Skews > 30 Degrees and Design Fills ≤ 5 Feet	April 1, 2012	July 1, 2016
80311	16	<input type="checkbox"/>	Concrete End Sections for Pipe Culverts	Jan. 1, 2013	April 1, 2016
80277	17	<input type="checkbox"/>	Concrete Mix Design – Department Provided	Jan. 1, 2012	April 1, 2016
80261	18	<input type="checkbox"/>	Construction Air Quality – Diesel Retrofit	June 1, 2010	Nov. 1, 2014
80387	19	<input type="checkbox"/>	Contrast Preformed Plastic Pavement Marking	Nov. 1, 2017	
80029	20	<input type="checkbox"/>	Disadvantaged Business Enterprise Participation	Sept. 1, 2000	March 2, 2019
80402	21	<input type="checkbox"/>	Disposal Fees	Nov. 1, 2018	
80378	22	<input type="checkbox"/>	Dowel Bar Inserter	Jan. 1, 2017	Jan. 1, 2018
80405	23	<input type="checkbox"/>	Elastomeric Bearings	Jan. 1, 2019	
* 80421	24	<input type="checkbox"/>	Electric Service Installation	Jan. 1, 2020	
80415	25	<input type="checkbox"/>	Emulsified Asphalts	Aug. 1, 2019	
* 80423	26	<input type="checkbox"/>	Engineer's Field Office and Laboratory	Jan. 1, 2020	
80388	27	<input type="checkbox"/>	Equipment Parking and Storage	Nov. 1, 2017	
80229	28	<input type="checkbox"/>	Fuel Cost Adjustment	April 1, 2009	Aug. 1, 2017
80417	29	<input type="checkbox"/>	Geotechnical Fabric for Pipe Underdrains and French Drains	Nov. 1, 2019	
80420	30	<input type="checkbox"/>	Geotextile Retaining Walls	Nov. 1, 2019	
80304	31	<input checked="" type="checkbox"/>	Grooving for Recessed Pavement Markings	Nov. 1, 2012	Nov. 1, 2017
* 80422	32	<input type="checkbox"/>	High Tension Cable Median Barrier Reflectors	Jan. 1, 2020	
80416	33	<input type="checkbox"/>	Hot-Mix Asphalt – Binder and Surface Course	July 2, 2019	Nov. 1, 2019
80398	34	<input type="checkbox"/>	Hot-Mix Asphalt – Longitudinal Joint Sealant	Aug. 1, 2018	Nov. 1, 2019
80406	35	<input type="checkbox"/>	Hot-Mix Asphalt – Mixture Design Verification and Production (Modified for I-FIT Projects)	Jan. 1, 2019	Nov. 1, 2019
80347	36	<input type="checkbox"/>	Hot-Mix Asphalt – Pay for Performance Using Percent Within Limits – Jobsite Sampling	Nov. 1, 2014	July 2, 2019
80383	37	<input type="checkbox"/>	Hot-Mix Asphalt – Quality Control for Performance	April 1, 2017	July 2, 2019
80411	38	<input type="checkbox"/>	Luminaires, LED	April 1, 2019	
80393	39	<input type="checkbox"/>	Manholes, Valve Vaults, and Flat Slab Tops	Jan. 1, 2018	March 1, 2019
80045	40	<input type="checkbox"/>	Material Transfer Device	June 15, 1999	Aug. 1, 2014
80418	41	<input type="checkbox"/>	Mechanically Stabilized Earth Retaining Walls	Nov. 1, 2019	
* 80424	42	<input type="checkbox"/>	Micro-Surfacing and Slurry Sealing	Jan. 1, 2020	
80165	43	<input type="checkbox"/>	Moisture Cured Urethane Paint System	Nov. 1, 2006	Jan. 1, 2010
80412	44	<input type="checkbox"/>	Obstruction Warning Luminaires, LED	Aug. 1, 2019	
80349	45	<input type="checkbox"/>	Pavement Marking Blackout Tape	Nov. 1, 2014	April 1, 2016

80371	46	<input type="checkbox"/>	Pavement Marking Removal	July 1, 2016	
80389	47	<input type="checkbox"/>	Portland Cement Concrete	Nov. 1, 2017	
80359	48	<input type="checkbox"/>	Portland Cement Concrete Bridge Deck Curing	April 1, 2015	Nov. 1, 2019
80300	49	<input type="checkbox"/>	Preformed Plastic Pavement Marking Type D - Inlaid	April 1, 2012	April 1, 2016
80328	50	<input type="checkbox"/>	Progress Payments	Nov. 2, 2013	
34261	51	<input type="checkbox"/>	Railroad Protective Liability Insurance	Dec. 1, 1986	Jan. 1, 2006
80157	52	<input type="checkbox"/>	Railroad Protective Liability Insurance (5 and 10)	Jan. 1, 2006	
80306	53	<input type="checkbox"/>	Reclaimed Asphalt Pavement (RAP) and Reclaimed Asphalt Shingles (RAS)	Nov. 1, 2012	July 2, 2019
* 80407	54	<input type="checkbox"/>	Removal and Disposal of Regulated Substances	Jan. 1, 2019	Jan. 1, 2020
80419	55	<input type="checkbox"/>	Silt Fence, Ground Stabilization and Riprap Filter Fabric	Nov. 1, 2019	
80395	56	<input type="checkbox"/>	Sloped Metal End Section for Pipe Culverts	Jan. 1, 2018	
80340	57	<input type="checkbox"/>	Speed Display Trailer	April 2, 2014	Jan. 1, 2017
80127	58	<input type="checkbox"/>	Steel Cost Adjustment	April 2, 2004	Aug. 1, 2017
80408	59	<input type="checkbox"/>	Steel Plate Beam Guardrail Manufacturing	Jan. 1, 2019	
80413	60	<input type="checkbox"/>	Structural Timber	Aug. 1, 2019	
80397	61	<input type="checkbox"/>	Subcontractor and DBE Payment Reporting	April 2, 2018	
80391	62	<input type="checkbox"/>	Subcontractor Mobilization Payments	Nov. 2, 2017	April 1, 2019
80317	63	<input type="checkbox"/>	Surface Testing of Hot-Mix Asphalt Overlays	Jan. 1, 2013	Aug. 1, 2019
80298	64	<input checked="" type="checkbox"/>	Temporary Pavement Marking	April 1, 2012	April 1, 2017
80403	65	<input type="checkbox"/>	Traffic Barrier Terminal, Type 1 Special	Nov. 1, 2018	
80409	66	<input type="checkbox"/>	Traffic Control Devices - Cones	Jan. 1, 2019	
* 80410	67	<input type="checkbox"/>	Traffic Spotters	Jan. 1, 2019	
20338	68	<input type="checkbox"/>	Training Special Provisions	Oct. 15, 1975	
80318	69	<input type="checkbox"/>	Traversable Pipe Grate for Concrete End Sections	Jan. 1, 2013	Jan. 1, 2018
80288	70	<input type="checkbox"/>	Warm Mix Asphalt	Jan. 1, 2012	April 1, 2016
80302	71	<input type="checkbox"/>	Weekly DBE Trucking Reports	June 2, 2012	April 2, 2015
80414	72	<input type="checkbox"/>	Wood Fence Sight Screen	Aug. 1, 2019	
80071	73	<input type="checkbox"/>	Working Days	Jan. 1, 2002	

The following special provisions are in the 2020 Supplemental Specifications and Recurring Special Provisions.

<u>File Name</u>	<u>Special Provision Title</u>	<u>New Location(s)</u>	<u>Effective</u>	<u>Revised</u>
80404	Coarse Aggregate Quality for Micro-Surfacing and Cape Seals	Article 1004.01(b)	Jan. 1, 2019	
80392	Lights on Barricades	Articles 701.16, 701.17(c)(2) & 603.07	Jan. 1, 2018	
80336	Longitudinal Joint and Crack Patching	Check Sheet #36	April 1, 2014	April 1, 2016
80400	Mast Arm Assembly and Pole	Article 1077.03(b)	Aug. 1, 2018	
80394	Metal Flared End Section for Pipe Culverts	Articles 542.07(c) and 542.11	Jan. 1, 2018	April 1, 2018
80390	Payments to Subcontractors	Article 109.11	Nov. 2, 2017	April 1, 2017

The following special provisions require additional information from the designer. The additional information needs to be submitted as a separate document. The Project Coordination and Implementation section will then include the information in the applicable special provision.

- Bridge Demolition Debris
- Building Removal - Case I
- Building Removal - Case II
- Building Removal - Case III
- Building Removal-Case IV
- Completion Date
- Completion Date Plus Working Days
- DBE Participation
- Material Transfer Device
- Railroad Protective Liability Insurance
- Training Special Provisions
- Working Days

GROOVING FOR RECESSED PAVEMENT MARKINGS (BDE)

Effective: November 1, 2012

Revised: November 1, 2017

Description. This work shall consist of grooving the pavement surface in preparation for the application of recessed pavement markings.

Equipment. Equipment shall be according to the following.

- (a) Preformed Plastic Pavement Marking Installations. The grooving equipment shall have a free-floating saw blade cutting head equipped with gang-stacked diamond saw blades. The diamond saw blades shall be of uniform wear and shall produce a smooth textured surface. Any ridges in the groove shall have a maximum height of 15 mils (0.38 mm).
- (b) Liquid and Thermoplastic Pavement Marking Installations. The grooving equipment shall be equipped with either a free-floating saw blade cutting head or a free-floating grinder cutting head configuration with diamond or carbide tipped cutters and shall produce an irregular textured surface.

CONSTRUCTION REQUIREMENTS

General. The Contractor shall supply the Engineer with a copy of the pavement marking material manufacturer's recommendations for constructing a groove.

Pavement Grooving Methods. The grooves for recessed pavement markings shall be constructed using the following methods.

- (a) Wet Cutting Head Operation. When water is required or used to cool the cutting head, the groove shall be flushed with high pressure water immediately following the cut to avoid build up and hardening of slurry in the groove. The pavement surface shall be allowed to dry for a minimum of 24 hours prior to the final cleaning of the groove and application of the pavement marking material.
- (b) Dry Cutting Head Operation. When used on HMA pavements, the groove shall be vacuumed or cleaned by blasting with high-pressure air to remove loose aggregate, debris, and dust generated during the cutting operation. When used on PCC pavements, the groove shall be flushed with high pressure water or shot blasted to remove any PCC particles that may have become destabilized during the grooving process. If high pressure water is used, the pavement surface shall be allowed to dry for a minimum of 24 hours prior to the final cleaning of the groove and application of the pavement marking material.

Pavement Grooving. Grooving shall not cause ravels, aggregate fractures, spalling or disturbance of the joints to the underlying surface of the pavement. Grooves shall be cut into

the pavement prior to the application of the pavement marking material. Grooves shall be cut such that the width is 1 in. (25 mm) greater than the width of the pavement marking line as specified on the plans. Grooves for letters and symbols shall be cut in a square or rectangular shape so that the entire marking will fit within the limits of the grooved area. The position of the edge of the grooves shall be a minimum of 2 in. (50 mm) from the edge of all longitudinal joints. The depth of the groove shall not be less than the manufacturer's recommendations for the pavement marking material specified, but shall be installed to a minimum depth of 110 mils (2.79 mm) and a maximum depth of 200 mils (5.08 mm) for pavement marking tapes thermoplastic markings and a minimum depth of 40 mils (1.02 mm) and a maximum depth of 80 mils (2.03 mm) for liquid markings. The cutting head shall be operated at the appropriate speed in order to prevent undulation of the cutting head and grooving at an inconsistent depth.

At the start of grooving operations, a 50 ft (16.7 m) test section shall be installed and depth measurements shall be made at 10 ft (3.3 m) intervals within the test section. The individual depth measurements shall be within the allowable ranges according to this Article. If it is determined the test section has not been grooved at the appropriate depth or texture, adjustments shall be made to the cutting head and another 50 ft (16.7 m) test section shall be installed and checked. This process shall continue until the test section meets the requirements of this Article.

For new HMA pavements, grooves shall not be installed within 10 days of the placement of the final course of pavement.

Final Cleaning. Immediately prior to the application of the pavement marking material or primer sealer, the groove shall be cleaned with high-pressure air blast.

Method of Measurement. This work will be measured for payment in place, in feet (meter) for the groove width specified.

Grooving for letter, numbers and symbols will be measured in square feet (square meters).

Basis of Payment. This work will be paid for at the contract unit price per foot (meter) for GROOVING FOR RECESSED PAVEMENT MARKING of the groove width specified, and per square foot (square meter) for GROOVING FOR RECESSED PAVEMENT MARKING, LETTERS AND SYMBOLS.

The following shall only apply when preformed plastic pavement markings are to be recessed:

Add the following paragraph after the first paragraph of Article 780.07 of the Standard Specifications.

"The markings shall be capable of being applied in a grooved slot on new and existing portland cement concrete and HMA surfaces, by means of a pressure-sensitive, precoated adhesive, or liquid contact cement which shall be applied at the time of installation. A primer sealer shall be applied with a roller and shall cover and seal the entire bottom of the groove.

The primer sealer shall be recommended by the manufacturer of the pavement marking material and shall be compatible with the material being used. The Contractor shall install the markings in the groove as soon as possible after the primer sealer cures according to the manufacturer's recommendations. The markings placed in the groove shall be rolled and tamped into the groove with a roller or tamper cart cut to fit the groove and loaded with or weighing at least 200 lb (90kg). Vehicle tires shall not be used for tamping. The Contractor shall roll and tamp the material with a minimum of 6 passes to prevent easy removal or peeling."

80304

HOT-MIX ASPHALT - DENSITY TESTING OF LONGITUDINAL JOINTS (BDE)

Effective: January 1, 2010

Revised: August 1, 2018

Description. This work shall consist of testing the density of longitudinal joints as part of the quality control/quality assurance (QC/QA) of hot-mix asphalt (HMA). Work shall be according to Section 1030 of the Standard Specifications except as follows.

Quality Control/Quality Assurance (QC/QA). Delete the second and third sentence of the third paragraph of Article 1030.05(d)(3) of the Standard Specifications.

Add the following paragraphs to the end of Article 1030.05(d)(3) of the Standard Specifications:

"Longitudinal joint density testing shall be performed at each random density test location. Longitudinal joint testing shall be located at a distance equal to the lift thickness or a minimum of 4 in. (100 mm), from each pavement edge. (i.e. for a 5 in. (125 mm) lift the near edge of the density gauge or core barrel shall be within 5 in. (125 mm) from the edge of pavement.) Longitudinal joint density testing shall be performed using either a correlated nuclear gauge or cores.

- a. Confined Edge. Each confined edge density shall be represented by a one-minute nuclear density reading or a core density and shall be included in the average of density readings or core densities taken across the mat which represents the Individual Test.
- b. Unconfined Edge. Each unconfined edge joint density shall be represented by an average of three one-minute density readings or a single core density at the given density test location and shall meet the density requirements specified herein. The three one-minute readings shall be spaced 10 ft (3 m) apart longitudinally along the unconfined pavement edge and centered at the random density test location.

When a longitudinal joint sealant (LJS) is applied, longitudinal joint density testing will not be required on the joint(s) sealed."

Revise the Density Control Limits table in Article 1030.05(d)(4) of the Standard Specifications to read:

"Mixture Composition	Parameter	Individual Test (Includes confined edges)	Unconfined Edge Joint Density Minimum
IL-4.75	N _{design} = 50	93.0 – 97.4% ^{1/}	91.0%
IL-9.5	N _{design} = 90	92.0 – 96.0%	90.0%
IL-9.5, IL-9.5L	N _{design} < 90	92.5 – 97.4%	90.0%
IL-19.0	N _{design} = 90	93.0 – 96.0%	90.0%
IL-19.0, IL-19.0L	N _{design} < 90	93.0 ^{2/} – 97.4%	90.0%

SMA	Ndesign = 50 & 80	93.5 - 97.4%	91.0%"
-----	-------------------	--------------	--------

80246

TEMPORARY PAVEMENT MARKING (BDE)

Effective: April 1, 2012

Revised: April 1, 2017

Revise Article 703.02 of the Standard Specifications to read:

“703.02 Materials. Materials shall be according to the following.

- (a) Pavement Marking Tape, Type I and Type III 1095.06
- (b) Paint Pavement Markings 1095.02
- (c) Pavement Marking Tape, Type IV 1095.11”

Revise the second paragraph of Article 703.05 of the Standard Specifications to read:

“Type I marking tape or paint shall be used at the option of the Contractor, except paint shall not be applied to the final wearing surface unless authorized by the Engineer for late season applications where tape adhesion would be a problem. Type III or Type IV marking tape shall be used on the final wearing surface when the temporary pavement marking will conflict with the permanent pavement marking such as on tapers, crossovers and lane shifts.”

Revise Article 703.07 of the Standard Specifications to read:

“703.07 Basis of Payment. This work will be paid for as follows.

- a) Short Term Pavement Marking. Short term pavement marking will be paid for at the contract unit price per foot (meter) for SHORT TERM PAVEMENT MARKING. Removal of short term pavement markings will be paid for at the contract unit price per square foot (square meter) for SHORT TERM PAVEMENT MARKING REMOVAL.
- b) Temporary Pavement Marking. Where the Contractor has the option of material type, temporary pavement marking will be paid for at the contract unit price per foot (meter) for TEMPORARY PAVEMENT MARKING of the line width specified, and at the contract unit price per square foot (square meter) for TEMPORARY PAVEMENT MARKING LETTERS AND SYMBOLS.

Where the Department specifies the use of pavement marking tape, the Type III or Type IV temporary pavement marking will be paid for at the contract unit price per foot (meter) for PAVEMENT MARKING TAPE, TYPE III or PAVEMENT MARKING TAPE, TYPE IV of the line width specified and at the contract unit price per square feet (square meter) for PAVEMENT MARKING TAPE, TYPE III - LETTERS AND SYMBOLS or PAVEMENT MARKING TAPE, TYPE IV – LETTERS AND SYMBOLS.

Removal of temporary pavement markings will be paid for at the contract unit price per square foot (square meter) for TEMPORARY PAVEMENT MARKING REMOVAL.

When temporary pavement marking is shown on the Standard, the cost of the temporary pavement marking and its removal will be included in the cost of the Standard."

Add the following to Section 1095 of the Standard Specifications:

"1095.11 Pavement Marking Tape, Type IV. The temporary, preformed, patterned markings shall consist of a white or yellow tape with wet retroreflective media incorporated to provide immediate and continuing retroreflection during both wet and dry conditions. The tape shall be manufactured without the use of heavy metals including lead chromate pigments or other similar, lead-containing chemicals.

The white and yellow Type IV marking tape shall meet the Type III requirements of Article 1095.06 and the following.

- (a) Composition. The retroreflective pliant polymer pavement markings shall consist of a mixture of high-quality polymeric materials, pigments and glass beads distributed throughout its base cross-sectional area, with a layer of wet retroreflective media bonded to a durable polyurethane topcoat surface. The patterned surface shall have approximately 40% ± 10% of the surface area raised and presenting a near vertical face to traffic from any direction. The channels between the raised areas shall be substantially free of exposed beads or particles.
- (b) Retroreflectance. The white and yellow markings shall meet the following for initial dry and wet retroreflectance.
 - (1) Dry Retroreflectance. Dry retroreflectance shall be measured under dry conditions according to ASTM D 4061 and meet the values described in Article 1095.06 for Type III tape.
 - (2) Wet Retroreflectance. Wet retroreflectance shall be measured under wet conditions according to ASTM E 2177 and meet the values shown in the following table.

Wet Retroreflectance, Initial R_L

Color	R _L 1.05/88.76
White	300
Yellow	200

- (c) Color. The material shall meet the following requirements for daylight reflectance and color, when tested, using a color spectrophotometer with 45 degrees circumferential/zero degree geometry, illuminant D65, and a two degree observer angle. The color instrument shall measure the visible spectrum from 380 to 720 nm with a wavelength measurement interval and spectral bandpass of 10 nm.

Color	Daylight Reflectance %Y
White	65 minimum
*Yellow	36-59

*Shall match Federal 595 Color No. 33538 and the chromaticity limits as follows.

x	0.490	0.475	0.485	0.530
y	0.470	0.438	0.425	0.456

- (d) Skid Resistance. The surface of the markings shall provide an average minimum skid resistance of 50 BPN when tested according to ASTM E 303.
- (e) Sampling, Testing, Acceptance, and Certification. Prior to approval and use of the wet reflective, temporary, removable pavement marking tape, the manufacturer shall submit a notarized certification from an independent laboratory, together with the results of all tests, stating that the material meets the requirements as set forth herein. The certification test report shall state the lot tested, manufacturer's name, and date of manufacture.

After approval by the Department, samples and certification by the manufacturer shall be submitted for each batch used. The manufacturer shall submit a certification stating that the material meets the requirements as set forth herein and is essentially identical to the material sent for qualification. The certification shall state the lot tested, manufacturer's name, and date of manufacture.

All costs of testing (other than tests conducted by the Department) shall be borne by the manufacturer."

GROOVING FOR RECESSED PAVEMENT MARKINGS (BDE)

Effective: November 1, 2012

Revised: November 1, 2020

Description. This work shall consist of grooving the pavement surface in preparation for the application of recessed pavement markings.

Equipment. Equipment shall be according to the following.

- (a) Preformed Plastic Pavement Marking Installations. The grooving equipment shall have a free-floating saw blade cutting head equipped with gang-stacked diamond saw blades. The diamond saw blades shall be of uniform wear and shall produce a smooth textured surface. Any ridges in the groove shall have a maximum height of 15 mils (0.38 mm).
- (b) Paint, Epoxy, Polyurea, Modified Urethane and Thermoplastic Pavement Marking Installations. The grooving equipment shall be equipped with either a free-floating saw blade cutting head or a free-floating grinder cutting head configuration with diamond or carbide tipped cutters and shall produce an irregular textured surface.

CONSTRUCTION REQUIREMENTS

General. The Contractor shall supply the Engineer with a copy of the pavement marking material manufacturer's recommendations for constructing a groove.

Pavement Grooving Methods. The grooves for recessed pavement markings shall be constructed using the following methods.

- (a) Wet Cutting Head Operation. When water is required or used to cool the cutting head, the groove shall be flushed with high pressure water immediately following the cut to avoid build up and hardening of slurry in the groove. The pavement surface shall be allowed to dry for a minimum of 24 hours prior to the final cleaning of the groove and application of the pavement marking material.
- (b) Dry Cutting Head Operation. When used on HMA pavements, the groove shall be vacuumed or cleaned by blasting with high-pressure air to remove loose aggregate, debris, and dust generated during the cutting operation. When used on PCC pavements, the groove shall be flushed with high pressure water or shot blasted to remove any PCC particles that may have become destabilized during the grooving process. If high pressure water is used, the pavement surface shall be allowed to dry for a minimum of 24 hours prior to the final cleaning of the groove and application of the pavement marking material.

Pavement Grooving. Grooving shall not cause ravels, aggregate fractures, spalling or disturbance of the joints to the underlying surface of the pavement. Grooves shall be cut into the pavement prior to the application of the pavement marking material. Grooves shall be cut such

that the width is 1 in. (25 mm) greater than the width of the pavement marking line as specified on the plans. Grooves for letters and symbols shall be cut in a square or rectangular shape so that the entire marking will fit within the limits of the grooved area. The position of the edge of the grooves shall be a minimum of 2 in. (50 mm) from the edge of all longitudinal joints. The depth of the groove shall not be less than the manufacturer's recommendations for the pavement marking material specified, and according to the following.

- (a) Preformed Plastic and Thermoplastic Pavement Markings. Grooving shall be to a minimum depth of 110 mils (2.79 mm) and a maximum depth of 200 mils (5.08 mm).
- (b) Paint, Epoxy, Polyurea, and Modified Urethane Pavement Markings. Grooving shall be to a minimum depth of 40 mils (1.02 mm) and a maximum depth of 80 mils (2.03 mm).

The cutting head shall be operated at the appropriate speed in order to prevent undulation of the cutting head and grooving at an inconsistent depth.

For new HMA pavements, grooves shall not be installed within 10 days of the placement of the final course of pavement.

Final Cleaning. Immediately prior to the application of the pavement marking material or primer sealer, the groove shall be cleaned with high-pressure air blast.

Method of Measurement. Grooving for lines will be measured for payment in place, in feet (meters).

Grooving for letters and symbols will be measured in square feet (square meters).

Basis of Payment. This work will be paid for at the contract unit price per foot (meter) for GROOVING FOR RECESSED PAVEMENT MARKING of the groove width specified, and per square foot (square meter) for GROOVING FOR RECESSED PAVEMENT MARKING, LETTERS AND SYMBOLS.

The following shall only apply when preformed plastic pavement markings are to be recessed:

Add the following paragraph after the first paragraph of Article 780.07 of the Standard Specifications.

"Recessed markings in grooving shall be capable of being applied in a grooved slot on new and existing portland cement concrete and HMA surfaces, by means of a pressure-sensitive, precoated adhesive, or liquid contact cement which shall be applied at the time of installation. A primer sealer shall be applied with a roller and shall cover and seal the entire bottom of the groove. The primer sealer shall be recommended by the manufacturer of the pavement marking material and shall be compatible with the material being used. The Contractor shall install the markings in the groove as soon as possible after the primer sealer cures according to the manufacturer's recommendations."

80304

HOT-MIX ASPHALT – TACK COAT (BDE)

Effective: November 1, 2016

Revise Article 1032.06(a) of the Standard Specifications to read:

"(a) *Anionic Emulsified Asphalt.* Anionic emulsified asphalts shall be according to AASHTO M 140. SS-1h emulsions used as a tack coat shall have the cement mixing test waived."

80376

HOT-MIX ASPHALT – TACK COAT (BDE)

Effective: November 1, 2016

Revise Article 1032.06(a) of the Standard Specifications to read:

“(a) Anionic Emulsified Asphalt. Anionic emulsified asphalts shall be according to AASHTO M 140. SS-1h emulsions used as a tack coat shall have the cement mixing test waived.”

80376

FRICION AGGREGATE (D-1)

Effective: January 1, 2011
 Revised: April 29, 2016

Revise Article 1004.03(a) of the Standard Specifications to read:

"1004.03 Coarse Aggregate for Hot-Mix Asphalt (HMA). The aggregate shall be according to Article 1004.01 and the following.

(a) Description. The coarse aggregate for HMA shall be according to the following table.

Use	Mixture	Aggregates Allowed
Class A	Seal or Cover	<u>Allowed Alone or in Combination</u> ^{5/} : Gravel Crushed Gravel Carbonate Crushed Stone Crystalline Crushed Stone Crushed Sandstone Crushed Slag (ACBF) Crushed Steel Slag Crushed Concrete
HMA Low ESAL	Stabilized Subbase or Shoulders	<u>Allowed Alone or in Combination</u> ^{5/} : Gravel Crushed Gravel Carbonate Crushed Stone Crystalline Crushed Stone Crushed Sandstone Crushed Slag (ACBF) Crushed Steel Slag ^{1/} Crushed Concrete
HMA High ESAL Low ESAL	Binder IL-19.0 or IL-19.0L SMA Binder	<u>Allowed Alone or in Combination</u> ^{5/ 6/} : Crushed Gravel Carbonate Crushed Stone ^{2/} Crystalline Crushed Stone Crushed Sandstone Crushed Slag (ACBF) Crushed Concrete ^{3/}

Use	Mixture	Aggregates Allowed
HMA High ESAL Low ESAL	C Surface and Leveling Binder IL-9.5 or IL-9.5L SMA Ndesign 50 Surface	<u>Allowed Alone or in Combination</u> ^{5/} : Crushed Gravel Carbonate Crushed Stone ^{2/} Crystalline Crushed Stone Crushed Sandstone Crushed Slag (ACBF) Crushed Steel Slag ^{4/} Crushed Concrete ^{3/}
		<u>Other Combinations Allowed:</u> <i>Up to...</i> <i>With...</i> 25% Limestone Dolomite 50% Limestone Any Mixture D aggregate other than Dolomite 75% Limestone Crushed Slag (ACBF) or Crushed Sandstone
HMA High ESAL	D Surface and Leveling Binder IL-9.5 SMA Ndesign 50 Surface	<u>Allowed Alone or in Combination</u> ^{5/} : Crushed Gravel Carbonate Crushed Stone (other than Limestone) ^{2/} Crystalline Crushed Stone Crushed Sandstone Crushed Slag (ACBF) Crushed Steel Slag ^{4/} Crushed Concrete ^{3/}
		<u>Other Combinations Allowed:</u> <i>Up to...</i> <i>With...</i> 25% Limestone Dolomite 50% Limestone Any Mixture D aggregate other than Dolomite 75% Limestone Crushed Slag (ACBF) or Crushed Sandstone
HMA High ESAL	E Surface IL-9.5 SMA Ndesign 80 Surface	<u>Allowed Alone or in Combination</u> ^{5/ 6/} : Crystalline Crushed Stone Crushed Sandstone Crushed Slag (ACBF) Crushed Steel Slag No Limestone.
		<u>Other Combinations Allowed:</u> <i>Up to...</i> <i>With...</i>

Use	Mixture	Aggregates Allowed	
		50% Dolomite ^{2/}	Any Mixture E aggregate
		75% Dolomite ^{2/}	Crushed Sandstone, Crushed Slag (ACBF), Crushed Steel Slag, or Crystalline Crushed Stone
		75% Crushed Gravel ^{2/} or Crushed Concrete ^{3/}	Crushed Sandstone, Crystalline Crushed Stone, Crushed Slag (ACBF), or Crushed Steel Slag
HMA High ESAL	F Surface IL-9.5 SMA Ndesign 80 Surface	<u>Allowed Alone or in Combination</u> ^{6/ 6/} : Crystalline Crushed Stone Crushed Sandstone Crushed Slag (ACBF) Crushed Steel Slag No Limestone.	
		<u>Other Combinations Allowed:</u>	
		<u>Up to...</u>	<u>With...</u>
		50% Crushed Gravel ^{2/} , Crushed Concrete ^{3/} , or Dolomite ^{2/}	Crushed Sandstone, Crushed Slag (ACBF), Crushed Steel Slag, or Crystalline Crushed Stone

- 1/ Crushed steel slag allowed in shoulder surface only.
- 2/ Carbonate crushed stone (limestone) and/or crushed gravel shall not be used in SMA Ndesign 80. In SMA Ndesign 50, carbonate crushed stone shall not be blended with any of the other aggregates allowed alone in Ndesign 50 SMA binder or Ndesign 50 SMA surface.
- 3/ Crushed concrete will not be permitted in SMA mixes.
- 4/ Crushed steel slag shall not be used as leveling binder.
- 5/ When combinations of aggregates are used, the blend percent measurements shall be by volume."
- 6/ Combining different types of aggregate will not be permitted in SMA Ndesign 80."

HMA MIXTURE DESIGN REQUIREMENTS (D-1)

Effective: January 1, 2013

Revised: January 1, 2018

1) Design Composition and Volumetric Requirements

Revise the table in Article 406.06(d) of the Standard Specifications to read:

"MINIMUM COMPACTED LIFT THICKNESS	
Mixture Composition	Thickness, in. (mm)
IL-4.75	3/4 (19)
SMA-9.5, IL-9.5, IL-9.5L	1 1/2 (38)
SMA-12.5	2 (50)
IL-19.0, IL-19.0L	2 1/4 (57)"

Revise the table in Article 1004.03(c) of the Standard Specifications to read:

"Use	Size/Application	Gradation No.
Class A-1, 2, & 3	3/8 in. (10 mm) Seal	CA 16
Class A-1	1/2 in. (13 mm) Seal	CA 15
Class A-2 & 3	Cover	CA 14
HMA High ESAL	IL-19.0 IL-9.5	CA 11 ^{1/} CA 16, CA 13 ^{3/}
HMA Low ESAL	IL-19.0L IL-9.5L Stabilized Subbase or Shoulders	CA 11 ^{1/} CA 16
SMA ^{2/}	1/2 in. (12.5mm) Binder & Surface IL 9.5 Surface	CA13 ^{3/} , CA14 or CA16 CA16, CA 13 ^{3/}

1/ CA 16 or CA-13 may be blended with the gradations listed.

2/ The coarse aggregates used shall be capable of being combined with stone sand, slag sand, or steel slag sand meeting the FA/FM 20 gradation and mineral filler to meet the approved mix design and the mix requirements noted herein.

3/ CA 13 shall be 100 percent passing the 1/2 in. (12.5mm) sieve.

Revise Article 1004.03(e) of the Supplemental Specifications to read:

"(e) Absorption. For SMA the coarse aggregate shall also have water absorption \leq 2.0 percent."

Revise the last paragraph of Article 1102.01 (a) (5) of the Standard Specifications to read:

"IL-4.75 and Stone Matrix Asphalt (SMA) mixtures which contain aggregate having absorptions greater than or equal to 2.0 percent, or which contain steel slag sand, shall have minimum surge bin storage plus haul time of 1.5 hours."

Revise the nomenclature table in Article 1030.01 of the Standard Specifications to read:

"High ESAL	IL-19.0 binder; IL-9.5 surface; IL-4.75; SMA-12.5, SMA-9.5
Low ESAL	IL-19.0L binder; IL-9.5L surface; Stabilized Subbase (HMA) ^{1/} ; HMA Shoulders ^{2/}

1/ Uses 19.0L binder mix.

2/ Uses 19.0L for lower lifts and 9.5L for surface lift."

Revise Article 1030.02 of the Standard Specifications and Supplemental Specifications to read:

"**1030.02 Materials.** Materials shall be according to the following.

Item	Article/Section
(a) Coarse Aggregate	1004.03
(b) Fine Aggregate	1003.03
(c) RAP Material	1031
(d) Mineral Filler	1011
(e) Hydrated Lime	1012.01
(f) Slaked Quicklime (Note 1)	
(g) Performance Graded Asphalt Binder (Note 2)	1032
(h) Fibers (Note 3)	
(i) Warm Mix Asphalt (WMA) Technologies (Note 4)	

Note 1. Slaked quicklime shall be according to ASTM C 5.

Note 2. The asphalt binder shall be an SBS PG 76-28 when the SMA is used on a full-depth asphalt pavement and SBS PG 76-22 when used as an overlay, except where modified herein. The asphalt binder shall be an Elvaloy or SBS PG 76-22 for IL-4.75, except where modified herein. The elastic recovery shall be a minimum of 80.

Note 3. A stabilizing additive such as cellulose or mineral fiber shall be added to the SMA mixture according to Illinois Modified AASHTO M 325. The stabilizing additive shall meet the Fiber Quality Requirements listed in Illinois Modified AASHTO M 325. Prior to approval and use of fibers, the Contractor shall submit a notarized certification by the producer of these materials stating they meet these requirements. Reclaimed Asphalt Shingles (RAS) may be used in Stone Matrix Asphalt (SMA) mixtures designed with an SBA polymer modifier as a fiber additive if the mix design with RAS included meets AASHTO T305 requirements. The RAS shall be from a certified source that

produces either Type 1 or Type 2. Material shall meet requirements noted herein and the actual dosage rate will be determined by the Engineer.

Note 4. Warm mix additives or foaming processes shall be selected from the current Bureau of Materials and Physical Research Approved List, "Warm Mix Asphalt Technologies".

Revise Article 1030.04(a)(1) of the Standard Specifications and the Supplemental Specifications to read:

"(1) High ESAL Mixtures. The Job Mix Formula (JMF) shall fall within the following limits.

High ESAL, MIXTURE COMPOSITION (% PASSING) ^{1/}										
Sieve Size	IL-19.0 mm		SMA ^{4/} IL-12.5 mm		SMA ^{4/} IL-9.5 mm		IL-9.5 mm		IL-4.75 mm	
	min	max	min	max	min	max	min	max	min	max
1 1/2 in. (37.5 mm)										
1 in. (25 mm)		100								
3/4 in. (19 mm)	90	100		100						
1/2 in. (12.5 mm)	75	89	80	100		100		100		100
3/8 in. (9.5 mm)				65	90	100	90	100		100
#4 (4.75 mm)	40	60	20	30	36	60	34	69	90	100
#8 (2.36 mm)	20	42	16	24 ^{5/}	16	32 ^{5/}	34 ^{6/}	52 ^{2/}	70	90
#16 (1.18 mm)	16	30					10	32	60	65
#30 (600 μm)			12	16	12	18				
#60 (300 μm)	6	15					4	15	15	30
#100 (150 μm)	4	9					3	10	10	18
#200 (75 μm)	3	6	7.0	9.0 ^{3/}	7.5	9.5 ^{5/}	4	6	7	9 ^{3/}
Ratio Dust/Asphalt Binder		1.0		1.5		1.5		1.0		1.0

- 1/ Based on percent of total aggregate weight.
- 2/ The mixture composition shall not exceed 44 percent passing the #8 (2.36 mm) sieve for surface courses with N_{design} = 90.
- 3/ Additional minus No. 200 (0.075 mm) material required by the mix design shall be mineral filler, unless otherwise approved by the Engineer.
- 4/ The maximum percent passing the #635 (20 μm) sieve shall be ≤ 3 percent.

- 5/ When establishing the Adjusted Job Mix Formula (AJMF) the percent passing the #8 (2.36 mm) sieve shall not be adjusted above the percentage stated on the table.
- 6/ When establishing the Adjusted Job Mix Formula (AJMF) the percent passing the #8 (2.36 mm) sieve shall not be adjusted below 34 percent.

Revise Article 1030.04(b)(1) of the Standard Specifications to read:

- "(1) High ESAL Mixtures. The target value for the air voids of the HMA shall be 4.0 percent and for IL-4.75 it shall be 3.5 percent at the design number of gyrations. The VMA and VFA of the HMA design shall be based on the nominal maximum size of the aggregate in the mix, and shall conform to the following requirements.

VOLUMETRIC REQUIREMENTS High ESAL				
Ndesign,	Voids in the Mineral Aggregate (VMA), % minimum			Voids Filled with Asphalt Binder (VFA), %
	IL-19.0	IL-9.5	IL-4.75 ^{1/}	
50	13.5	15.0	18.5	65 - 78 ^{2/}
70				
90				

1/ Maximum Draindown for IL-4.75 shall be 0.3 percent

2/ VFA for IL-4.75 shall be 72-85 percent"

Replace Article 1030.04(b)(3) of the Standard Specifications with the following:

- "(3) SMA Mixtures.

Volumetric Requirements SMA ^{1/}			
Ndesign	Design Air Voids Target %	Voids in the Mineral Aggregate (VMA), % min.	Voids Filled with Asphalt (VFA), %
80 ^{4/}	3.5	17.0 ^{2/}	75 - 83
		16.0 ^{3/}	

1/ Maximum draindown shall be 0.3 percent. The draindown shall be determined at the JMF asphalt binder content at the mixing temperature plus 30 °F.

2/ Applies when specific gravity of coarse aggregate is ≥ 2.760 .

- 3/ Applies when specific gravity of coarse aggregate is < 2.760 .
- 4/ Blending of different types of aggregate will not be permitted.
For surface course, the coarse aggregate can be crushed steel slag, crystalline crushed stone or crushed sandstone. For binder course, coarse aggregate shall be crushed stone (dolomite), crushed gravel, crystalline crushed stone, or crushed sandstone.

Add to the end of Article 1030.05 (d) (2) a. of the Standard Specifications:

"During production, the Contractor shall test SMA mixtures for draindown according to AASHTO T305 at a frequency of 1 per day of production."

Delete last sentence of the second paragraph of Article 1102.01(a) (4) b. 2.

Add to the end of Article 1102.01 (a) (4) b. 2.:

"As an option, collected dust (baghouse) may be used in lieu of manufactured mineral filler according to the following:

- (a.) Sufficient collected dust (baghouse) is available for production of the SMA mix for the entire project.
- (b.) A mix design was prepared based on collected dust (baghouse).

2) Design Verification and Production

Revise Article 1030.04 (d) of the Standard Specifications to read:

"(d) Verification Testing. High ESAL, IL-4.75, and SMA mix designs submitted for verification will be tested to ensure that the resulting mix designs will pass the required criteria for the Hamburg Wheel Test (IL mod AASHTO T-324) and the Tensile Strength Test (IL mod AASHTO T-283). The Department will perform a verification test on gyratory specimens compacted by the Contractor. If the mix fails the Department's verification test, the Contractor shall make the necessary changes to the mix and resubmit compacted specimens to the Department for verification. If the mix fails again, the mix design will be rejected.

All new and renewal mix designs will be required to be tested, prior to submittal for Department verification and shall meet the following requirements:

- (1) Hamburg Wheel Test criteria. The maximum allowable rut depth shall be 0.5 in. (12.5 mm). The minimum number of wheel passes at the 0.5 in. (12.5 mm) rut depth criteria shall be based on the high temperature binder grade of the mix as specified in the mix requirements table of the plans.

Illinois Modified AASHTO T 324 Requirements ^{1/}

Asphalt Binder Grade	# Repetitions	Max Rut Depth (mm)
PG 70 -XX (or higher)	20,000	12.5
PG 64 -XX (or lower)	10,000	12.5

- 1/ When produced at temperatures of 275 ± 5 °F (135 ± 3 °C) or less, loose Warm Mix Asphalt shall be oven aged at 270 ± 5 °F (132 ± 3 °C) for two hours prior to gyratory compaction of Hamburg Wheel specimens.

Note: For SMA Designs (N-80) the maximum rut depth is 6.0 mm at 20,000 repetitions.
For IL 4.75mm Designs (N-50) the maximum rut depth is 9.0mm at 15,000 repetitions.

- (2) Tensile Strength Criteria. The minimum allowable conditioned tensile strength shall be 60 psi (415 kPa) for non-polymer modified performance graded (PG) asphalt binder and 80 psi (550 kPa) for polymer modified PG asphalt binder. The maximum allowable unconditioned tensile strength shall be 200 psi (1380 kPa)."

Production Testing. Revise first paragraph of Article 1030.06(a) of the Standard Specifications to read:

- "(a) High ESAL, IL-4.75, WMA, and SMA Mixtures. For each contract, a 300 ton (275 metric tons) test strip, except for SMA mixtures it will be 400 ton (363 metric ton), will be required at the beginning of HMA production for each mixture at the beginning of each construction year according to the Manual of Test Procedures for Materials "Hot Mix Asphalt Test Strip Procedures". At the request of the Producer, the Engineer may waive the test strip if previous construction during the current construction year has demonstrated the constructability of the mix using Department test results."

Add the following after the sixth paragraph in Article 1030.06 (a) of the Standard Specifications:

"The Hamburg Wheel test shall also be conducted on all HMA mixtures from a sample taken within the first 500 tons (450 metric tons) on the first day of production or during start up with a split reserved for the Department. The mix sample shall be tested according to the Illinois Modified AASHTO T 324 and shall meet the requirements specified herein. Mix production shall not exceed 1500 tons (1350 metric tons) or one day's production, whichever comes first, until the testing is completed and the mixture is found to be in conformance. The requirement to cease mix production may be waived if the plant produced mixture demonstrates conformance prior to start of mix production for a contract.

If the mixture fails to meet the Hamburg Wheel criteria, no further mixture will be accepted until the Contractor takes such action as is necessary to furnish a mixture meeting the criteria"

Method of Measurement:

Add the following after the fourth paragraph of Article 406.13 (b):

"The plan quantities of SMA mixtures shall be adjusted using the actual approved binder and surface Mix Design's Gmb."

Basis of Payment.

Replace the fourth paragraph of Article 406.14 of the Standard Specifications with the following:

"Stone matrix asphalt will be paid for at the contract unit price per ton (metric ton) for POLYMERIZED HOT-MIX ASPHALT SURFACE COURSE, STONE MATRIX ASPHALT, of the mixture composition and Ndesign specified; and POLYMERIZED HOT-MIX ASPHALT BINDER COURSE, STONE MATRIX ASPHALT; of the mixture composition and Ndesign specified."

RECLAIMED ASPHALT PAVEMENT AND RECLAIMED ASPHALT SHINGLES (D-1)

Effective: November 1, 2012

Revise: January 1, 2018

Revise Section 1031 of the Standard Specifications to read:

"SECTION 1031. RECLAIMED ASPHALT PAVEMENT AND RECLAIMED ASPHALT SHINGLES

1031.01 Description. Reclaimed asphalt pavement and reclaimed asphalt shingles shall be according to the following.

- (a) Reclaimed Asphalt Pavement (RAP). RAP is the material resulting from cold milling or crushing an existing hot-mix asphalt (HMA) pavement. RAP will be considered processed FRAP after completion of both crushing and screening to size. The Contractor shall supply written documentation that the RAP originated from routes or airfields under federal, state, or local agency jurisdiction.
- (b) Reclaimed Asphalt Shingles (RAS). Reclaimed asphalt shingles (RAS). RAS is from the processing and grinding of preconsumer or post-consumer shingles. RAS shall be a clean and uniform material with a maximum of 0.5 percent unacceptable material, as defined in Central Bureau of Materials Policy Memorandum, "Reclaimed Asphalt Shingle (RAS) Sources", by weight of RAS. All RAS used shall come from a Central Bureau of Materials approved processing facility where it shall be ground and processed to 100 percent passing the 3/8 in. (9.5 mm) sieve and 90 percent passing the #4 (4.75 mm) sieve. RAS shall meet the testing requirements specified herein. In addition, RAS shall meet the following Type 1 or Type 2 requirements.
 - (1) Type 1. Type 1 RAS shall be processed, preconsumer asphalt shingles salvaged from the manufacture of residential asphalt roofing shingles.
 - (2) Type 2. Type 2 RAS shall be processed post-consumer shingles only, salvaged from residential, or four unit or less dwellings not subject to the National Emission Standards for Hazardous Air Pollutants (NESHAP).

1031.02 Stockpiles. RAP and RAS stockpiles shall be according to the following.

- (a) RAP Stockpiles. The Contractor shall construct individual, sealed RAP stockpiles meeting one of the following definitions. Additional processed RAP (FRAP) shall be stockpiled in a separate working pile, as designated in the QC Plan, and only added to the sealed stockpile when test results for the working pile are complete and are found to meet tolerances specified herein for the original sealed FRAP stockpile. Stockpiles shall be sufficiently separated to prevent intermingling at the base. All stockpiles (including unprocessed RAP and FRAP) shall be identified by signs indicating the type as listed below (i.e. "Non- Quality, FRAP -#4 or Type 2 RAS", etc...).

- (1) Fractionated RAP (FRAP). FRAP shall consist of RAP from Class I, HMA (High and Low ESAL) or equivalent mixtures. The coarse aggregate in FRAP shall be crushed aggregate and may represent more than one aggregate type and/or quality, but shall be at least C quality. All FRAP shall be processed prior to testing and sized into fractions with the separation occurring on or between the #4 (4.75 mm) and 1/2 in. (12.5 mm) sieves. Agglomerations shall be minimized such that 100 percent of the RAP in the coarse fraction shall pass the maximum sieve size specified for the mix the FRAP will be used in.
- (2) Restricted FRAP (B quality) stockpiles shall consist of RAP from Class I, HMA (High ESAL), or HMA (High ESAL). If approved by the Engineer, the aggregate from a maximum 3.0 in. (75 mm) single combined pass of surface/binder milling will be classified as B quality. All millings from this application will be processed into FRAP as described previously.
- (3) Conglomerate. Conglomerate RAP stockpiles shall consist of RAP from Class I, HMA (High and Low ESAL) or equivalent mixtures. The coarse aggregate in this RAP shall be crushed aggregate and may represent more than one aggregate type and/or quality, but shall be at least C quality. This RAP may have an inconsistent gradation and/or asphalt binder content prior to processing. All conglomerate RAP shall be processed (FRAP) prior to testing. Conglomerate RAP stockpiles shall not contain steel slag or other expansive material as determined by the Department.
- (4) Conglomerate "D" Quality (DQ). Conglomerate DQ RAP stockpiles shall consist of RAP from HMA shoulders, bituminous stabilized subbases or HMA (Low ESAL)/HMA (Low ESAL) IL-19.0L binder mixture. The coarse aggregate in this RAP may be crushed or round but shall be at least D quality. This RAP may have an inconsistent gradation and/or asphalt binder content. Conglomerate DQ RAP stockpiles shall not contain steel slag or other expansive material as determined by the Department.
- (5) Non-Quality. RAP stockpiles that do not meet the requirements of the stockpile categories listed above shall be classified as "Non-Quality".

RAP or FRAP containing contaminants, such as earth, brick, sand, concrete, sheet asphalt, bituminous surface treatment (i.e. chip seal), pavement fabric, joint sealants, plant cleanout etc., will be unacceptable unless the contaminants are removed to the satisfaction of the Engineer. Sheet asphalt shall be stockpiled separately.

- (b) RAS Stockpiles. Type 1 and Type 2 RAS shall be stockpiled separately and shall be sufficiently separated to prevent intermingling at the base. Each stockpile shall be signed indicating what type of RAS is present.

However, a RAS source may submit a written request to the Department for approval to blend mechanically a specified ratio of Type 1 RAS with Type 2 RAS. The source will not be permitted to change the ratio of the blend without the Department prior written

approval. The Engineer's written approval will be required, to mechanically blend RAS with any fine aggregate produced under the AGCS, up to an equal weight of RAS, to improve workability. The fine aggregate shall be "B Quality" or better from an approved Aggregate Gradation Control System source. The fine aggregate shall be one that is approved for use in the HMA mixture and accounted for in the mix design and during HMA production.

Records identifying the shingle processing facility supplying the RAS, RAS type, and lot number shall be maintained by project contract number and kept for a minimum of three years.

1031.03 Testing. FRAP and RAS testing shall be according to the following.

(a) FRAP Testing. When used in HMA, the FRAP shall be sampled and tested either during processing or after stockpiling. It shall also be sampled during HMA production.

(1) During Stockpiling. For testing during stockpiling, washed extraction samples shall be run at the minimum frequency of one sample per 500 tons (450 metric tons) for the first 2000 tons (1800 metric tons) and one sample per 2000 tons (1800 metric tons) thereafter. A minimum of five tests shall be required for stockpiles less than 4000 tons (3600 metric tons).

(2) Incoming Material. For testing as incoming material, washed extraction samples shall be run at a minimum frequency of one sample per 2000 tons (1800 metric tons) or once per week, whichever comes first.

(3) After Stockpiling. For testing after stockpiling, the Contractor shall submit a plan for approval to the District proposing a satisfactory method of sampling and testing the RAP/FRAP pile either in-situ or by restockpiling. The sampling plan shall meet the minimum frequency required above and detail the procedure used to obtain representative samples throughout the pile for testing.

Before extraction, each field sample of FRAP, shall be split to obtain two samples of test sample size. One of the two test samples from the final split shall be labeled and stored for Department use. The Contractor shall extract the other test sample according to Department procedure. The Engineer reserves the right to test any sample (split or Department-taken) to verify Contractor test results.

(b) RAS Testing. RAS shall be sampled and tested during stockpiling according to Central Bureau of Materials Policy Memorandum, "Reclaimed Asphalt Shingle (RAS) Sources". The Contractor shall also sample as incoming material at the HMA plant.

(1) During Stockpiling. Washed extraction and testing for unacceptable materials shall be run at the minimum frequency of one sample per 200 tons (180 metric tons) for the first 1000 tons (900 metric tons) and one sample per 1000 tons (900 metric tons) thereafter. A minimum of five samples are required for stockpiles less than

1000 tons (900 metric tons). Once a ≤ 1000 ton (900 metric ton), five-sample/test stockpile has been established it shall be sealed. Additional incoming RAS shall be in a separate working pile as designated in the Quality Control plan and only added to the sealed stockpile when the test results of the working pile are complete and are found to meet the tolerances specified herein for the original sealed RAS stockpile.

- (2) Incoming Material. For testing as incoming material at the HMA plant, washed extraction shall be run at the minimum frequency of one sample per 250 tons (227 metric tons). A minimum of five samples are required for stockpiles less than 1000 tons (900 metric tons). The incoming material test results shall meet the tolerances specified herein.

The Contractor shall obtain and make available all test results from start of the initial stockpile sampled and tested at the shingle processing facility in accordance with the facility's QC Plan.

Before extraction, each field sample shall be split to obtain two samples of test sample size. One of the two test samples from the final split shall be labeled and stored for Department use. The Contractor shall extract the other test sample according to Department procedures. The Engineer reserves the right to test any sample (split or Department-taken) to verify Contractor test results.

1031.04 Evaluation of Tests. Evaluation of test results shall be according to the following.

- (a) Evaluation of FRAP Test Results. All test results shall be compiled to include asphalt binder content, gradation and, when applicable (for slag), G_{mm} . A five test average of results from the original pile will be used in the mix designs. Individual extraction test results run thereafter, shall be compared to the average used for the mix design, and will be accepted if within the tolerances listed below.

Parameter	FRAP
No. 4 (4.75 mm)	$\pm 6\%$
No. 8 (2.36 mm)	$\pm 5\%$
No. 30 (600 μm)	$\pm 5\%$
No. 200 (75 μm)	$\pm 2.0\%$
Asphalt Binder	$\pm 0.3\%$
G_{mm}	± 0.03 ^{1/}

1/ For stockpile with slag or steel slag present as determined in the current Manual of Test Procedures Appendix B 21, "Determination of Reclaimed Asphalt Pavement Aggregate Bulk Specific Gravity".

If any individual sieve and/or asphalt binder content tests are out of the above tolerances when compared to the average used for the mix design, the FRAP stockpile shall not be

used in Hot-Mix Asphalt unless the FRAP representing those tests is removed from the stockpile. All test data and acceptance ranges shall be sent to the District for evaluation.

The Contractor shall maintain a representative moving average of five tests to be used for Hot-Mix Asphalt production.

With the approval of the Engineer, the ignition oven may be substituted for extractions according to the ITP, "Calibration of the Ignition Oven for the Purpose of Characterizing Reclaimed Asphalt Pavement (RAP)" or Illinois Modified AASHTO T-164-11, Test Method A.

- (b) Evaluation of RAS Test Results. All of the test results, with the exception of percent unacceptable materials, shall be compiled and averaged for asphalt binder content and gradation. A five test average of results from the original pile will be used in the mix designs. Individual test results run thereafter, when compared to the average used for the mix design, will be accepted if within the tolerances listed below.

Parameter	RAS
No. 8 (2.36 mm)	± 5 %
No. 16 (1.18 mm)	± 5 %
No. 30 (600 µm)	± 4 %
No. 200 (75 µm)	± 2.5 %
Asphalt Binder Content	± 2.0 %

If any individual sieve and/or asphalt binder content tests are out of the above tolerances when compared to the average used for the mix design, the RAS shall not be used in Hot-Mix Asphalt unless the RAS representing those tests is removed from the stockpile. All test data and acceptance ranges shall be sent to the District for evaluation.

- (c) Quality Assurance by the Engineer. The Engineer may witness the sampling and splitting conduct assurance tests on split samples taken by the Contractor for quality control testing a minimum of once a month.

The overall testing frequency will be performed over the entire range of Contractor samples for asphalt binder content and gradation. The Engineer may select any or all split samples for assurance testing. The test results will be made available to the Contractor as soon as they become available.

The Engineer will notify the Contractor of observed deficiencies.

Differences between the Contractor's and the Engineer's split sample test results will be considered acceptable if within the following limits.

Test Parameter	Acceptable Limits of Precision
----------------	--------------------------------

% Passing: ^{1/}	FRAP	RAS
1/2 in.	5.0%	
No. 4	5.0%	
No. 8	3.0%	4.0%
No. 30	2.0%	4.0%
No. 200	2.2%	4.0%
Asphalt Binder Content	0.3%	3.0%
G _{mm}	0.030	

1/ Based on washed extraction.

In the event comparisons are outside the above acceptable limits of precision, the Engineer will immediately investigate.

- (d) Acceptance by the Engineer. Acceptable of the material will be based on the validation of the Contractor's quality control by the assurance process.

1031.05 Quality Designation of Aggregate in RAP and FRAP.

- (a) RAP. The aggregate quality of the RAP for homogeneous, conglomerate, and conglomerate "D" quality stockpiles shall be set by the lowest quality of coarse aggregate in the RAP stockpile and are designated as follows.

- (1) RAP from Class I, HMA (High ESAL), or (Low ESAL) IL-9.5L surface mixtures are designated as containing Class B quality coarse aggregate.
- (2) RAP from HMA (Low ESAL) IL-19.0L binder mixture is designated as Class D quality coarse aggregate.
- (3) RAP from Class I, HMA (High ESAL) binder mixtures, bituminous base course mixtures, and bituminous base course widening mixtures are designated as containing Class C quality coarse aggregate.
- (4) RAP from bituminous stabilized subbase and BAM shoulders are designated as containing Class D quality coarse aggregate.

- (b) FRAP. If the Engineer has documentation of the quality of the FRAP aggregate, the Contractor shall use the assigned quality provided by the Engineer.

If the quality is not known, the quality shall be determined as follows. Fractionated RAP stockpiles containing plus #4 (4.75 mm) sieve coarse aggregate shall have a maximum tonnage of 5,000 tons (4,500 metric tons). The Contractor shall obtain a representative sample witnessed by the Engineer. The sample shall be a minimum of 50 lb (25 kg). The sample shall be extracted according to Illinois Modified AASHTO T 164 by a consultant laboratory prequalified by the Department for the specified testing. The consultant laboratory shall submit the test results along with the recovered aggregate to

the District Office. The cost for this testing shall be paid by the Contractor. The District will forward the sample to the Central Bureau of Materials Aggregate Lab for MicroDeval Testing, according to ITP 327. A maximum loss of 15.0 percent will be applied for all HMA applications. *The fine aggregate portion of the fractionated RAP shall not be used in any HMA mixtures that require a minimum of "B" quality aggregate or better, until the coarse aggregate fraction has been determined to be acceptable thru a MicroDeval Testing.*

1031.06 Use of FRAP and/or RAS in HMA. The use of FRAP and/or RAS shall be the Contractor's option when constructing HMA in all contracts.

(a) FRAP. The use of FRAP in HMA shall be as follows.

- (1) Coarse Aggregate Size (after extraction). The coarse aggregate in all FRAP shall be equal to or less than the nominal maximum size requirement for the HMA mixture to be produced.
- (2) Steel Slag Stockpiles. FRAP stockpiles containing steel slag or other expansive material, as determined by the Department, shall be homogeneous and will be approved for use in HMA (High ESAL and Low ESAL) mixtures regardless of lift or mix type.
- (3) Use in HMA Surface Mixtures (High and Low ESAL). FRAP stockpiles for use in HMA surface mixtures (High and Low ESAL) shall have coarse aggregate that is Class B quality or better. FRAP shall be considered equivalent to limestone for frictional considerations unless produced/screened to minus 3/8 inch.
- (4) Use in HMA Binder Mixtures (High and Low ESAL), HMA Base Course, and HMA Base Course Widening. FRAP stockpiles for use in HMA binder mixtures (High and Low ESAL), HMA base course, and HMA base course widening shall be FRAP in which the coarse aggregate is Class C quality or better.
- (5) Use in Shoulders and Subbase. FRAP stockpiles for use in HMA shoulders and stabilized subbase (HMA) shall be FRAP, Restricted FRAP, conglomerate, or conglomerate DQ.

(b) RAS. RAS meeting Type 1 or Type 2 requirements will be permitted in all HMA applications as specified herein.

(c) FRAP and/or RAS Usage Limits. Type 1 or Type 2 RAS may be used alone or in conjunction with FRAP in HMA mixtures up to a maximum of 5.0 percent by weight of the total mix.

When FRAP is used alone or FRAP is used in conjunction with RAS, the percent of virgin asphalt binder replacement (ABR) shall not exceed the amounts indicated in the table below for a given N Design.

Max Asphalt Binder Replacement for FRAP with RAS Combination

HMA Mixtures ^{1/2/4/}	Maximum % ABR		
	Ndesign	Binder/Leveling Binder	Surface
30L	50	40	30
50	40	35	30
70	40	30	30
90	40	30	30
4.75 mm N-50			40
SMA N-80			30

- 1/ For Low ESAL HMA shoulder and stabilized subbase, the percent asphalt binder replacement shall not exceed 50 % of the total asphalt binder in the mixture.
- 2/ When the binder replacement exceeds 15 % for all mixes, except for SMA and IL-4.75, the high and low virgin asphalt binder grades shall each be reduced by one grade (i.e. 25 % binder replacement using a virgin asphalt binder grade of PG64-22 will be reduced to a PG58-28). When constructing full depth HMA and the ABR is less than 15 %, the required virgin asphalt binder grade shall be PG64-28.
- 3/ When the ABR for SMA or IL-4.75 is 15 % or less, the required virgin asphalt binder shall be SBS PG76-22 and the elastic recovery shall be a minimum of 80. When the ABR for SMA or IL-4.75 exceeds 15%, the virgin asphalt binder grade shall be SBS PG70-28 and the elastic recovery shall be a minimum of 80.
- 4/ When FRAP or RAS is used alone, the maximum percent asphalt binder replacement designated on the table shall be reduced by 10 %.

1031.07 HMA Mix Designs. At the Contractor's option, HMA mixtures may be constructed utilizing RAP/FRAP and/or RAS material meeting the detailed requirements specified herein.

- (a) FRAP and/or RAS. FRAP and /or RAS mix designs shall be submitted for verification. If additional FRAP or RAS stockpiles are tested and found to be within tolerance, as defined under "Evaluation of Tests" herein, and meet all requirements herein, the additional FRAP or RAS stockpiles may be used in the original design at the percent previously verified.
- (b) RAS. Type 1 and Type 2 RAS are not interchangeable in a mix design.

The RAP, FRAP and RAS stone specific gravities (G_{sb}) shall be according to the "Determination of Aggregate Bulk (Dry) Specific Gravity (G_{sb}) or Reclaimed Asphalt Pavement (RAP) and

Reclaimed Asphalt Shingles (RAS)" procedure in the Department's Manual of Test Procedures for Materials.

1031.08 HMA Production. HMA production utilizing FRAP and/or RAS shall be as follows.

To remove or reduce agglomerated material, a scalping screen, gator, crushing unit, or comparable sizing device approved by the Engineer shall be used in the RAS and FRAP feed system to remove or reduce oversized material.

If during mix production, corrective actions fail to maintain FRAP, RAS or QC/QA test results within control tolerances or the requirements listed herein the Contractor shall cease production of the mixture containing FRAP or RAS and conduct an investigation that may require a new mix design.

(a) RAS. RAS shall be incorporated into the HMA mixture either by a separate weight depletion system or by using the RAP weigh belt. Either feed system shall be interlocked with the aggregate feed or weigh system to maintain correct proportions for all rates of production and batch sizes. The portion of RAS shall be controlled accurately to within ± 0.5 percent of the amount of RAS utilized. When using the weight depletion system, flow indicators or sensing devices shall be provided and interlocked with the plant controls such that the mixture production is halted when RAS flow is interrupted.

(b) HMA Plant Requirements. HMA plants utilizing FRAP and/or RAS shall be capable of automatically recording and printing the following information.

(1) Dryer Drum Plants.

- a. Date, month, year, and time to the nearest minute for each print.
- b. HMA mix number assigned by the Department.
- c. Accumulated weight of dry aggregate (combined or individual) in tons (metric tons) to the nearest 0.1 ton (0.1 metric ton).
- d. Accumulated dry weight of RAS and FRAP in tons (metric tons) to the nearest 0.1 ton (0.1 metric ton).
- e. Accumulated mineral filler in revolutions, tons (metric tons), etc. to the nearest 0.1 unit.
- f. Accumulated asphalt binder in gallons (liters), tons (metric tons), etc. to the nearest 0.1 unit.
- g. Residual asphalt binder in the RAS and FRAP material as a percent of the total mix to the nearest 0.1 percent.

- h. Aggregate RAS and FRAP moisture compensators in percent as set on the control panel. (Required when accumulated or individual aggregate and RAS and FRAP are printed in wet condition.)
- i. When producing mixtures with FRAP and/or RAS, a positive dust control system shall be utilized.
- j. Accumulated mixture tonnage.
- k. Dust Removed (accumulated to the nearest 0.1 ton (0.1 metric ton))

(2) Batch Plants.

- a. Date, month, year, and time to the nearest minute for each print.
- b. HMA mix number assigned by the Department.
- c. Individual virgin aggregate hot bin batch weights to the nearest pound (kilogram).
- d. Mineral filler weight to the nearest pound (kilogram).
- f. RAS and FRAP weight to the nearest pound (kilogram).
- g. Virgin asphalt binder weight to the nearest pound (kilogram).
- h. Residual asphalt binder in the RAS and FRAP material as a percent of the total mix to the nearest 0.1 percent.

The printouts shall be maintained in a file at the plant for a minimum of one year or as directed by the Engineer and shall be made available upon request. The printing system will be inspected by the Engineer prior to production and verified at the beginning of each construction season thereafter.

1031.09 RAP in Aggregate Surface Course and Aggregate Wedge Shoulders, Type B.

The use of RAP or FRAP in aggregate surface course and aggregate shoulders shall be as follows.

- (a) Stockpiles and Testing. RAP stockpiles may be any of those listed in Article 1031.02, except "Non-Quality" and "FRAP". The testing requirements of Article 1031.03 shall not apply. RAP used shall be according to the current Central Bureau of Materials Policy Memorandum, "Reclaimed Asphalt Pavement (RAP) for Aggregate Applications".
- (b) Gradation. The RAP material shall meet the gradation requirements for CA 6 according to Article 1004.01(c), except the requirements for the minus No. 200 (75 μ m) sieve shall not apply. The sample for the RAP material shall be air dried to constant weight prior to being tested for gradation."

HOT-MIX ASPHALT MIXTURE IL-9.5FG (CBM)

Effective: July 1, 2005
 Revised: August 16, 2018

Description. This work shall consist of constructing fine graded hot-mix asphalt (HMA) surface course or leveling binder with an IL-9.5FG mixture. Work shall be according to Sections 406, 407 and 1030 of the Standard Specifications, except as modified herein.

Materials. Add the following after the second paragraph of Article 1003.03(c) of the Standard Specifications:

“For mixture IL-9.5FG, the fine aggregate fraction shall consist of at least 67 percent manufactured sand meeting FA 20 gradation. The manufactured sand shall be stone sand, slag sand, steel slag sand, or combinations thereof.”

Mixture Design. Add the following to the table in Article 1030.04(a)(1):

"High ESAL, MIXTURE COMPOSITION (% PASSING) ^{1/}		
Sieve Size	IL-9.5FG	
	min	max
1 1/2 in. (37.5 mm)		
1 in. (25 mm)		
3/4 in. (19 mm)		
1/2 in. (12.5 mm)		100
3/8 in. (9.5 mm)	90	100
#4 (4.75 mm)	60 ^{6/}	75 ^{6/}
#8 (2.36 mm)	45 ^{6/}	60 ^{6/}
#16 (1.18 mm)	25	40
#30 (600 μm)	15	30
#50 (300 μm)	8	15
#100 (150 μm)	6	10
#200 (75 μm)	4	6.5
Ratio Dust/Asphalt Binder		1.0

6/ When used as level binder placed less than 1 in. (25 mm) thick, the min and max percent passing shall each be increased 5%.”

Revise the table in Article 1030.04(b)(1) of the Standard Specifications to read:

"VOLUMETRIC REQUIREMENTS High ESAL				
Ndesign	Voids in the Mineral Aggregate (VMA), % minimum			Voids Filled with Asphalt Binder (VFA), %
	IL-19.0	IL-9.5 IL-9.5FG	IL-4.75 ^{1/}	
50	13.5	15.0	18.5	65 - 78 ^{2/}
70			65 - 75 ^{3/}	
90				

- 1/ Maximum Draindown for IL-4.75 shall be 0.3 percent.
- 2/ VFA for IL-4.75 shall be 76-83 percent.
- 3/ VFA for IL-9.5FG shall be 65-78 percent”

Quality Control/Quality Assurance (QC/QA). Revise the second table in Article 1030.05(d)(4) to read:

DENSITY CONTROL LIMITS			
Mixture Composition		Parameter	Individual Test
IL-4.75		Ndesign = 50	93.0 – 97.4 % ^{1/}
IL-9.5FG	Lifts ≥ 1.25 in. (32 mm)	Ndesign = 50 - 90	93.0 – 97.4 % ^{1/}
	Lifts < 1.25 in. (32 mm)	Ndesign = 50 - 90	91.0 – 96.0
IL-9.5		Ndesign = 90	92.0 – 96.0 %
IL-9.5, IL-9.5L,		Ndesign < 90	92.5 – 97.4 %
IL-19.0		Ndesign = 90	93.0 – 96.0 %
IL-19.0, IL-19.0L		Ndesign < 90	93.0 ^{2/} – 97.4 %
SMA		Ndesign = 50 & 80	93.5 – 97.4 %

1/ Density shall be determined by cores or by correlated, approved thin lift nuclear gauge.

2/ 92.0 % when placed as first lift on an unimproved subgrade.

CONSTRUCTION REQUIREMENTS

Leveling Binder. Revise the table and second paragraph of Article 406.05(c) of the Standard Specifications to read:

"Leveling Binder	
Nominal, Compacted, Leveling Binder Thickness, in. (mm)	Mixture Composition
≤ 1 1/4 (32)	IL-9.5, IL-9.5 FG, or IL-9.5L
> 1 1/4 to 2 (32 to 50)	IL-9.5, IL-9.5FG, or IL-9.5L

The density requirements of Article 406.07(c) shall apply for leveling binder, machine method, when the nominal, compacted thickness is: 3/4 in. (19 mm) or greater for IL 4.75 and IL-9.5FG mixtures; 1 1/4 in. (32 mm) or greater for IL-9.5 and IL-9.5L mixtures."

Basis of Payment. Add the following two paragraphs after the third paragraph of Article 406.14 of the Standard Specifications:

"Mixture IL-9.5FG will be paid for at the contract unit price per ton (metric ton) for LEVELING BINDER (HAND METHOD), IL-9.5FG, of the Ndesign specified; LEVELING BINDER (MACHINE METHOD), IL-9.5FG, of the Ndesign specified; or HOT-MIX ASPHALT SURFACE COURSE, IL-9.5FG, of the Ndesign specified.

Mixture IL-9.5FG in which polymer modified asphalt binders are required will be paid for at the contract unit price per ton (metric ton) for POLYMERIZED LEVELING BINDER (HAND METHOD), IL-9.5FG, of the Ndesign specified; POLYMERIZED LEVELING BINDER (MACHINE METHOD), IL-9.5FG, of the Ndesign specified; or POLYMERIZED HOT-MIX ASPHALT SURFACE COURSE, IL-9.5FG, of the Ndesign specified."

SPECIAL PROVISIONS
MCHENRY COUNTY
Section 21-00530-00-PP

TABLE OF CONTENTS

PREQUALIFICATION FOR BIDDERS.....	2
LOCATION AND DESCRIPTION OF WORK	2
PROJECT FUNDING.....	2
COMPLETION DATE	2
HIGHWAY STANDARDS	3
MIX DESIGN – HMA IL 9.5 SURFACE COURSE FG N50.....	3
CONSTRUCTING TEST STRIP – THIN LIFT.....	4
CONSTRUCTION REQUIREMENTS	4
PREPARATION OF SURFACE.....	5
BITUMINOUS MATERIALS THIN LIFT (TACK COAT).....	5
EQUIPMENT FOR WEIGHING BITUMINOUS MATERIALS	5
ROLLER REQUIREMENTS	6
QUALITY CONTROL/QUALITY ASSURANCE.....	6
EARTH EXCAVATION	6
TRAFFIC CONTROL & PROTECTION, (SPECIAL).....	7
TRAFFIC CONTROL PLAN	7
HMA BLEEDING OR FLUSHING	8
CRACK FILL EXTRACTION	8
HOT-MIX ASPHALT SURFACE REMOVAL – BUTT JOINT	9
CLASS D PATCHES, TYPE IV, 6 INCH.....	9
SHORT TERM PAVEMENT MARKINGS (SPECIAL).....	10
AGGREGATE SHOULDERS, TYPE B (SPECIAL)	10
RECESSED REFLECTIVE PAVEMENT MARKERS.....	11
PAVING OPERATIONS.....	11
GROOVED THERMOPLASTIC PAVEMENT MARKINGS	11
GROOVING FOR THERMOPLASTIC PAVEMENT MARKINGS.....	12
FINAL CLEANING.....	13
THERMOPLASTIC PAVEMENT MARKING APPLICATION.....	13
KEEPING ROADWAYS OPEN TO TRAFFIC	14
GENERAL AREA CLEANUP.....	14
LIEN WAIVERS	14
RAILROAD CROSSING NOTIFICATION	14

SPECIAL PROVISIONS
MCHENRY COUNTY
Section 21-00530-00-PP

The following Special Provisions supplement the “Standard Specifications for Road and Bridge Construction”, Adopted April 1, 2016, the latest edition of the “Manual on Uniform Traffic Control Devices for Streets and Highways”, and the “Manual of Test Procedures of Materials” in effect on the date of invitation of bids, and the Supplemental Specifications and Recurring Special Provisions indicated on the Check Sheet included herein which apply to and govern the construction of Ramer & Oak Grove Roads; Section 21-00530-00-PP, and in case of conflict with any part, or parts, of said Specifications, the said Special Provisions shall take precedence and shall govern.

PREQUALIFICATION FOR BIDDERS

Prequalification of bidders in accordance with the applicable parts of Check Sheet LRS6 of the *Supplemental Specifications and Recurring Special Provisions* will be required for this Section.

LOCATION AND DESCRIPTION OF WORK

This work consists of construction of “HMA IL 9.5 Surface Course FG (Thin Lift Overlay), N50”. Other associated work includes Aggregate Shoulders, Type B (Special), HMA Butt Joints (Special), HMA Patching – 6”, Recessed Reflector Remove/Install, Short Term Pavement Marking, ADA Detectable Installation and Grooved Permanent Pavement Marking installation along with other necessary and related work.

The Hot-Mix Asphalt IL 9.5 Surface Course FG N50, (TLO) shall be furnished and spread by machine and hand methods and thoroughly compacted by rolling at an average of 110.0 pounds per square yard (± 0.75 ”) on Cary/Algonquin Road.

PROJECT FUNDING

This improvement is being funded as follows:

- | | |
|------------------------|-----------------------|
| 1. RTA Sales Tax Funds | 30 % of Contract Cost |
| 2. MFT Funds | 70 % of Contract Cost |

COMPLETION DATE

This contract is a completion date contract. The start date for this project shall be **June 14, 2021** and all work shall be completed by **July 9, 2021**. This completion date will be strictly enforced and shall include all pay items, specifically all bituminous paving work, recessed pavement marker installation, grooved permanent pavement markings and removal of temporary traffic marking tape, where applicable. Liquidated damages will be charged in accordance with Article 108.09 of the Standard Specification for Road and Bridge Construction.

SPECIAL PROVISIONS
MCHENRY COUNTY
Section 21-00530-00-PP

HIGHWAY STANDARDS

Any reference to Highway Standards shall be assumed to mean the most recent revision.

MIX DESIGN – HMA IL 9.5 SURFACE COURSE FG N50

The Contractor shall be responsible to provide a mix design, prepared by an Illinois Department of Transportation (IDOT) approved Mix Design Laboratory, with the following criteria as guidance for the final product. Class A or B quality crushed aggregates shall be used which shall not exceed 2.0% absorption rate. The design mix formula (DMF) shall be prepared and submitted to the Engineer two (2) weeks prior to use. The DMF shall state the maximum particle size in the mixture, test temperature and absorption factors to be used for the determination of binder content. The HMA Mixture Design shall be prepared in accordance with the requirements of Article 1030.04 of the Standard Specifications for Road and Bridge Design, except as amended by this specification. Acceptance of mixtures for binder content shall include Voids in the Mineral Aggregate (VMA) ≥ 15.0 , and N50 @ 3.5% Air Voids (AV) for each test based on tests performed according to IDOT specifications. The mixture design compaction temperature shall be 305°F \pm 5°F. The plan virgin asphalt binder shall be SBS PG70-28. For use with recycled materials, the total ABR shall not exceed 15%, see “Reclaimed Asphalt Pavement & Reclaimed Asphalt Shingles (D-1)” special provision included with this proposal for further information. No mixture will be accepted until the DMF has been approved. The Volumetric requirements shall follow the DMF values.

Fractionated Reclaimed Asphalt Pavement (FRAP) shall be allowed to be included in the design. The Special Provision included in this contract Titled “Reclaimed Asphalt Pavement and Reclaimed Asphalt Shingles (D1)” shall govern.

This is an IDOT Experimental Feature Contract and the design will be provided to IDOT for review and verified by MCDOT.

The percentage of aggregate passing each sieve shall be in accordance with the following requirements and the DMF shall fall within these limits:

HMA Mixture IL 9.5 FG - TLO Mixture Composition (% Passing)	
3/4 in. (19.0 mm)	-
1/2 in. (12.5 mm)	100.0
3/8 in. (9.5 mm)	95.0 – 98.0
No. 4 (4.75 mm)	60.0 - 70.0
No. 8 (2.36 mm)	45.0 - 55.0

SPECIAL PROVISIONS
MCHENRY COUNTY
Section 21-00530-00-PP

No. 30 (600 μm)	20.0 - 30.0
No. 50 (300 μm)	8.0 - 14.0
No. 100 (150 μm)	5.0 - 10.0
No. 200 (75 μm)	4.0 - 7.0

Basis of Payment: This work shall be paid for at the contract lump sum price for **MIX DESIGN HMA Mixture IL 9.5 FG**, which price shall include all materials, labor, testing and equipment necessary to accomplish a successful design meeting project requirements.

CONSTRUCTING TEST STRIP – THIN LIFT

A test strip shall be performed at a site determined by the McHenry County Division of Transportation (MCDOT). The Test Strip shall be performed according to Article 406.14 and 1030.06 of IDOT Standard Specifications for Road and Bridge Construction. The Hamburg Wheel shall be used as one of the testing procedures for acceptance of the HMA test strip according to IDOT HMA 9.5 FG requirements. All core holes shall be filled with Aqua Patch.

Basis of Payment: This work shall be paid for at the contract lump sum price, **CONSTRUCTING TEST STRIP – THIN LIFT**, which price shall include all materials, labor, traffic control and equipment necessary to complete the work.

CONSTRUCTION REQUIREMENTS

The equipment used on this project shall be in accordance with the requirements of the applicable portions of Section 406 of the Standard Specifications for Road and Bridge Construction. The HMA shall be placed in the paving hopper at a temperature of 300°F±10°F. Segregation, flushing or bleeding of HMA mixtures will not be permitted. Corrective action shall be taken to prevent continuation of these conditions and these actions shall be described in the QC Addendum. Segregated, flushed or bleeding HMA mixtures shall be removed and replaced immediately as directed by the Engineer and at the expense of the contractor. All areas showing a deficiency of binder shall be removed and replaced as directed by the Engineer at the expense of the contractor. All HMA that becomes loose and broken, mixed with dirt, or in any way be defective shall be removed and replaced at the expense of the contractor. All crack fill material that becomes loose and/or removed from the crack shall be removed at the expense of the contractor and completed prior to the asphalt overlay. Constant monitoring of the semi's that pull in and out from in front of the paver is a majority of the reason for this happening. Cleaning of equipment and small tools shall not be accomplished on the pavement or shoulder areas. HMA courses shall not be placed on wet road surfaces and be only be placed when the ambient temperature and the temperature of the surface on which it is to be placed is 60°F or above. The speed of the paver shall not exceed 25 ft. per minute. Rollers shall be operated to avoid shoving of the HMA and at speeds not to exceed 3 mph. Before the start of paving each day transverse joints shall be saw cut into the existing TLO mat previously laid.

**SPECIAL PROVISIONS
MCHENRY COUNTY
Section 21-00530-00-PP**

PREPARATION OF SURFACE

The Contractor shall be responsible for all surface preparation necessary to meet the performance requirements. The pavement surface shall be clean and free of debris before placement of the tack coat.

BITUMINOUS MATERIALS THIN LIFT (TACK COAT)

The Bituminous Materials (Tack Coat) used for this job shall be SS-1h as stated in Sections 406 and 1032 of IDOT's Standard Specifications for Road and Bridge Construction.

This work shall be performed in accordance with the applicable parts of Section 403 of the *Standard Specifications for Road and Bridge Construction*. Method of measurement shall be by the pound and in accordance with the applicable parts of Article 403.15. Materials shall be selected in accordance with Article 406.02 Note 1, with the approval of the Engineer. Signage shall be in accordance with Section 701. The Tack Coat shall be fully cured prior to the placement of the Thin Lift Overlay to prevent pickup by haul trucks or paving equipment according to Article 406.05 of the *Standard Specifications for Road and Bridge Construction*. **During the application of the Tack Coat, flaggers shall be used to direct traffic off of the tacked areas until such time that the Tack Coat does not track onto vehicles or at the Direction of the Engineer.**

The tack coat shall be applied at a temperature recommended by the emulsion supplier. **The tack coat shall be applied uniformly across the entire lane width of pavement and only applied to the area that is to be HMA TLO overlaid that day.** Equipment or trucks shall not operate on the tack coat until such time that the tack coat will not track onto the tires. Aggregate (Tack Coat) shall only be used at intersections when directed by the Engineer.

The application rate for the tack coat shall be uniform and at a rate that will provide a residual asphalt rate of 0.10 lb/sq-ft. Determination of actual application rates shall be the responsibility of the Engineer and will be tested in the field. MCDOT's Testing Agency shall work with the Contractor in calibrating the tack distribution truck to assure correct application rates are achieved before any tack coating takes place on the job site.

Basis of Payment: This work shall be paid for at the contract unit price per pound of residual asphalt applied for, **BITUMINOUS MATERIALS THIN LIFT (TACK COAT)**, which price shall include all materials, labor, equipment and traffic control necessary to complete the work.

EQUIPMENT FOR WEIGHING BITUMINOUS MATERIALS

Contractors shall comply with Section 1102 of the *Standard Specifications*. Contractors will not be compensated for any bituminous mixtures which are not weighed in accordance with Article 1102 of the *Standard Specifications* and utilized on this project.

SPECIAL PROVISIONS
MCHENRY COUNTY
Section 21-00530-00-PP

ROLLER REQUIREMENTS

Rolling compaction of the HMA should follow immediately after the paver in a continuous operation with minimal stoppages using three (3) steel drum rollers. No vibratory use of the rollers will be allowed, the use of oscillation by the rollers shall be discussed at the pre-construction meeting. The rollers shall meet all requirements as stated in Article 406.07 Table I in IDOT's Standard Specifications for Road and Bridge Construction, except that all rollers shall be a minimum of 280 PLI. The HMA Thin Lift Overlay shall reach its required density before the material has cooled below 185°F. A release agent from the department's qualified products list may be added to the water system of the rollers to prevent adhesion of the material to the roller drum. The rolling patterns shall be established during the application of the test strip.

QUALITY CONTROL/QUALITY ASSURANCE

This is a Quality Control/Quality Assurance (QC/QA) project in accordance with Article 1030 of the Standard Specifications for Road and Bridge Construction and includes all test methods in IDOT's Manual of Test Procedures. Per the Standard Specifications for Road and Bridge Construction, the Contractor shall submit, in writing to the Engineer, a proposed QC plan for the project for approval before construction. The Contractor shall notify the MCDOT and McHenry County's material testing agency 24 hours prior to any paving operations. Contact information for the testing agency shall be provided at the pre-construction meeting.

The HMA Thin Lift Overlay shall be supplied from an IDOT certified HMA plant. The HMA shall be transported and placed according to a Quality Control Plan, prepared and submitted by the Contractor. The Quality Control Plan shall be submitted two weeks before the Pre-Construction meeting.

The Contractor shall produce a mixture in compliance with the DMF within the limits of the quality control tolerances. The Contractor shall maintain all quality control documentation and make a copy available to the Engineer upon request or at completion of work.

The Contractor shall sample the mix according to Section 1030 of the IDOT Standard Specifications for Road and Bridge Construction. The sample shall be tested for binder content, gradation and volumetrics prior to the next day's production. Density of the compacted dense graded mixture shall be determined from cores. Nuclear density testing shall be performed for quality control purposes. Density testing shall be in accordance with the IDOT LR1030 Special Provision, control limits shall be 95% to 102% of the growth curve target. A new growth curve target shall be required to be established at the beginning of each paving day. The Engineer may request cores to verify the % growth curve procedure.

EARTH EXCAVATION

This work shall be on Oak Grove Road at the bike path on both sides of the road just north of the Railroad crossing. One lane shall always be open to traffic during this work. This work shall consist of excavating a three (3') foot wide ten (10') foot long and one (1') deep trench on both

**SPECIAL PROVISIONS
MCHENRY COUNTY
Section 21-00530-00-PP**

sides of the road on the bike path to facilitate the installation of ADA Detectables. There shall be six (6") inches of CA6 placed in two (2) lifts with four (4") inches of Class S1 concrete placed on top of the CA6. Expansion material shall be used between the new concrete and the existing HMA material. The saw cutting of the HMA for the installation of the Detectables shall be part of the Earth Excavation unit costs.

Basis of Payment: This work shall be paid for at the contract unit price per Cubic Yard and according to Article 202.03 in the Standard Specifications for Road and Bridge Construction for **EARTH EXCAVATION**, which price shall include all materials, labor, equipment and traffic control necessary to complete the work.

Basis of Payment: This work shall be paid for at the contract unit price per square yard and according to Section 351 in the Standard Specifications for Road and Bridge Construction for **AGGREGATE BASE COURSE TYPE A, 6"** which price shall include all materials, labor, equipment and traffic control necessary to complete the work.

Basis of Payment: This work shall be paid for at the contract unit price per cubic yard and according to Section 1020 in the Standard Specifications for Road and Bridge Construction for **PORTLAND CEMENT CONCRETE SIDEWALK 4"**, which price shall include all materials, labor, equipment and traffic control necessary to complete the work.

TRAFFIC CONTROL & PROTECTION, (SPECIAL)

All roads shall remain open to traffic. The Contractor shall obtain, erect, maintain, and remove all signs, barricades, flaggers, and other traffic control devices as may be necessary for the regulating, warning, or guiding of traffic. Placement and maintenance of traffic control devices shall be in accordance with the applicable parts of Article 701 of the Standard Specifications and as directed by the Engineer. **No Contractor personnel or equipment shall be allowed onto the road surface or shoulders unless flaggers and traffic control devices are in place.**

Basis of Payment: This work shall be paid for at the contract lump sum price, as **TRAFFIC CONTROL & PROTECTION, (SPECIAL)** which price shall include all materials, labor, equipment and traffic control necessary to complete the work.

TRAFFIC CONTROL PLAN

The Engineer shall be responsible for administration of the Traffic Control Plan.

Two-way movement on all roads and access to abutting properties shall be maintained at all times.

Special attention is called to Article 107.09 and the applicable parts of Section 701 and 703 of the *Standard Specifications for Road and Bridge Construction* and the following *Highway Standards, Supplemental Specifications and Recurring Special Provisions* or other Special Provisions relating to traffic control.

SPECIAL PROVISIONS
MCHENRY COUNTY
Section 21-00530-00-PP

For projects that shall exceed four (4) days duration, all signs except those referring to daily lane closures shall be post-mounted in accordance with Highway Standard 701901.

The Contractor shall insure that all traffic control devices installed by the contractor are in place and operational every day, including Sundays, holidays and under all weather conditions.

Placement and maintenance of all traffic control devices shall be in accordance with the applicable Highway Standards and as directed by the Engineer. The Engineer shall be the sole judge as the acceptability of placement and maintenance of all traffic control devices. The contractor shall provide all materials, labor, equipment and traffic control necessary to complete the work. All work shall be paid for under the Pay Item – **TRAFFIC CONTROL & PROTECTION, (SPECIAL)**.

HMA BLEEDING OR FLUSHING

As stated previously the Contractor shall address in the HMA QC Addendum the steps that shall be taken to avoid this issue during construction. If any bleeding/flushing occurs in the HMA course, regardless of the cause, the areas of bleeding/flushing shall be removed immediately. The entire area affected is to be removed and replaced for the full width of the driving lane (including paved shoulder where applicable) with the same HMA course mixture at the expense of the Contractor.

If and when flushing occurs as stated above it shall be the responsibility of the Contractor to identify and stop the cause of the flushing immediately at the HMA Plant. The following guidelines shall be followed in the field when flushing occurs:

1. When flushing is identified behind the paver from a single truck the Contractor Foreman and QC field technician shall notify the QC Manager and the Plant of the flushing to resolve the issue. The above stated remedies shall be followed for any flushing issues.
2. When flushing is identified behind the paver of a second truck all paving operations shall stop and all HMA that is on the road shall return to the plant for disposal by the contractor. The above stated remedies shall be followed for any flushing issues.
3. Paving operations shall only start back up again when the QC Manager and the QA Manager are in agreement that the flushing issue has been resolved.

CRACK FILL EXTRACTION

Any areas where the existing crack fill material has been lifted from the crack, exposed above the existing surface, destabilized during the tacking operation or completely extracted from the routed area shall be removed prior to any placement of HMA. Constant monitoring in front of the paver where the semis are entering and exiting on the tack coated area need to be watched

**SPECIAL PROVISIONS
MCHENRY COUNTY
Section 21-00530-00-PP**

carefully as sharp turns of their wheels may tear out existing crack fill material. Any of this material that becomes embedded in the HMA thin lift material during the paving operation will cause early failure with the new HMA thin lift and needs to be removed prior too or during the paving process. This work shall be considered incidental to the **HMA IL 9.5 SURFACE COURSE FG – TLO ¾”** pay item.

HOT-MIX ASPHALT SURFACE REMOVAL – BUTT JOINT

Provisions shall be made for a satisfactory transition between pavement being resurfaced and pavement remaining at existing grade for side roads, curbs, driveways, rumble strips, surface structures and handholds. The Contractor shall remove to a depth as specified in such a manner that a straight joint will be secured. The work shall be accomplished in accordance with the Typical Sections in this Proposal and the applicable portions of Article 406.08 of the Standard Specifications. The butt joints shall be cut to a depth of one inch (1”) and taper to zero in five (5) feet. When butt joints are to be constructed under traffic, the contractor shall provide flaggers for traffic control. Disposal of milled material shall be the responsibility of the Contractor.

Total Square Yards identified in the Summary of Quantities Sheet includes all of the above mentioned areas.

The following work shall be incidental to the HMA butt joint work being performed and included in the unit price for **HOT-MIX SURFACE REOMVAL – BUTT JOINT**:

- Installation of HMA ramps at all side roads to accommodate the transition for the driving public.
- Removal of the temporary ramps and the saw cutting of the new HMA and the application of the tack coat onto the existing surface after the HMA ramps have been removed.

Basis of Payment: The work will be paid for by the square yard, measured in place and computed as **HOT-MIX ASPHALT SURFACE REMOVAL - BUTT JOINT** which price shall include all the equipment, labor and traffic control necessary to complete the work.

CLASS D PATCHES, TYPE IV, 6 INCH

Pavement Patching shall be done in accordance with Section 442 of the Standard Specifications. The pavement patching required in this contract is to a depth of six (6”) inches after the milling is complete and/or before the Thin Lift Overlay is placed.

Basis of Payment: This work shall be paid for at the contract unit price per square yard for **CLASS D PATCH, TYPE IV, 6 INCH**, which price shall include all materials, labor, equipment and traffic control necessary to complete the work.

SPECIAL PROVISIONS
MCHENRY COUNTY
Section 21-00530-00-PP

SHORT TERM PAVEMENT MARKINGS (SPECIAL)

Short Term pavement markings shall be placed at the end of every day after the following operations:

Application of Bituminous Materials – Thin Lift (Tack Coat)
HMA IL 9.5 Surface Course FG - TLO ¾”

Short Term pavement markings shall be placed in sets of two. Each pavement marker shall be four inches wide, four feet long and placed every forty (40) feet. Short term pavement markings shall be placed 1.5 feet from the center line of the road. Short term pavement markings shall conform to the requirements of Section 1095 of the Standard Specifications. When the Contractor installs the short term pavement markings and the markings interfere with the installation of the permanent pavement markings on the Bituminous Surface course the Contractor shall remove the short term pavement markings before the installation of the permanent pavement markings. Short term pavement markings shall be removed within five (5) working days of notification by the County that permanent markings are scheduled to be placed. If the Contractor does not remove the short term pavement markings before the permanent pavement markings are installed, the Contractor shall be responsible for removing the short term pavement markings and installing permanent pavement markings. The voids shall be filled with the same permanent pavement marking material when the Short Term pavement markers are removed. Removal of Short Term pavement markings shall be incidental to the pay item Short Term Pavement Marking (Special).

Basis of Payment: This work shall be paid for at the contract unit price per foot for **Short TERM PAVEMENT MARKING (SPECIAL)**, which price shall include all materials, labor, equipment and traffic control necessary to complete the work.

AGGREGATE SHOULDERS, TYPE B (SPECIAL)

Quantity estimates are shown on the Estimate of Quantities schedule located elsewhere in this proposal. Aggregate Shoulders, Type B (Special) will be measured in place and the area computed in square yards. The width for placement and measurement shall be as shown in the Estimate of Quantities. No payment will be made for aggregate outside the plan width shown on the Estimate of Quantities. Aggregate shoulder depths will be variable to meet existing conditions. The Contractor is responsible for determining the existing shoulder condition to determine needed quantities for the project. Shoulders shall be placed in such a manner as to not exceed 9.0% slope.

All coarse aggregate shoulder material shall be 100% crushed stone or crushed gravel or crushed concrete material meeting the IDOT specifications for CA-6. No Reclaimed Asphalt Pavement (RAP) shall be used for shoulder material on County Highways even if the RAP material meets the required CA-6 gradation requirements.

**SPECIAL PROVISIONS
MCHENRY COUNTY
Section 21-00530-00-PP**

Final payment for Aggregate Shoulders, Type B (Special) will be based upon the above stated widths unless otherwise directed by the Engineer in the field.

Basis of Payment: This work will be paid for at the contract unit price per ton for **AGGREGATE SHOULDERS, TYPE B (SPECIAL)** which price shall include all materials, labor, equipment and traffic control necessary to complete the work.

RECESSED REFLECTIVE PAVEMENT MARKERS

This work consists of furnishing and installing snowplow resistant recessed reflective pavement markers, at locations where markers were previously removed prior to resurfacing operations. Placement operations must be coordinated to prevent a conflict with pavement striping work.

Basis of Payment: Removal of existing recessed reflective pavement markers shall be paid for at the contract unit price per each for **RECESSED REFLECTIVE MARKER REMOVAL**, which price shall include all materials, labor, equipment and traffic control necessary to complete the work.

Basis of Payment: This work shall be paid for at the contract unit price per each for **RECESSED REFLECTIVE PAVEMENT MARKER**, which price shall include all materials, labor, equipment and traffic control necessary to complete the work in accordance with the standard drawings included in the contract and the applicable parts of Article 781 of the Standard Specifications.

PAVING OPERATIONS

The Contractor shall, at all times, provide at least a five (5) man crew for all paving operations. The five man crew will consist of a dump man, paver operator, two back screed operators and at least one lute man. The Contractor shall, when needed, lute the center seam between the two new layers of bituminous mix. The dump man should be able to identify areas of crack fill that may need to be removed prior to the paving and notify the lute man to remove any material from the roadway prior to paving.

GROOVED THERMOPLASTIC PAVEMENT MARKINGS

All quantities listed in the Schedule of Prices are estimated quantities. The County reserves the right to add or deduct from the locations and quantities shown on the Schedule of Prices. Final decisions to stripe or not stripe a road shall be made by the Engineer.

CONTROL OF WORK: Control of work shall be in accordance with Section 105 of the Standard Specifications. **The contractor shall provide traffic control during all grooving and striping operations.**

DESCRIPTION: This work shall consist of furnishing, grooving and applying inlaid thermoplastic pavement markings.

SPECIAL PROVISIONS
MCHENRY COUNTY
Section 21-00530-00-PP

MATERIALS: The materials shall be according to Article 780.02 of the “Standard Specifications” and the following:

Article 1095.01 for Thermoplastic Pavement Markings, paragraph (a) Ingredient Materials, subparagraph (4) Glass Beads, shall be modified by adding the following sentence:

The percentage of Glass Beads, Type A, shall be raised to 45% by decreasing the percentage of filler material specified in subparagraph (3) by 15%.

GENERAL: The Contractor shall supply the Engineer with a copy of the pavement marking material manufacturer’s recommendations for constructing a groove.

CONSTRUCTION REQUIREMENTS: The work shall be according to Section 780 of the “Standard Specifications” and the following:

GROOVING FOR THERMOPLASTIC PAVEMENT MARKINGS

All Grooving and Thermoplastic Pavement Striping shall not take place until fourteen (14) days after the Thin Lift HMA has been placed. The contractor shall provide traffic control during all grooving and striping operations.

The grooving and cleaning of the grooves and road shall be one continuous operation. Any ground HMA material that remains in the groove or road shall be removed before any striping begins.

Equipment: Plane the grooved lines according to manufacturer’s recommendations. The grooving equipment shall be equipped with either a free-floating saw blade cutting head or a free-floating grinder cutting head configuration with diamond or carbide tipped cutters and shall produce an irregular textured surface.

Pavement Grooving Methods: The grooves for recessed pavement markings shall be constructed using the following methods:

(a) Wet Cutting Head Operation. When water is required or used to cool the cutting head, the groove shall be flushed with high pressure water immediately following the cut to avoid build up and hardening of slurry in the groove. The pavement surface shall be allowed to dry for a minimum of 24 hours prior to the final cleaning of the groove and application of the pavement marking material.

(b) Dry Cutting Head Operation. When used on HMA pavements, the groove shall be vacuumed or cleaned by blasting with a high-pressure air blower with at least 185

SPECIAL PROVISIONS
MCHENRY COUNTY
Section 21-00530-00-PP

ft³/min air flow and 120 psi air pressure to remove loose aggregate, debris, and dust generated during the cutting operation. When used on PCC pavements, the groove shall be flushed with high pressure water or shot blasted to remove any PCC particles that may have become destabilized during the grooving process. If high pressure water is used, the pavement surface shall be allowed to dry for a minimum of 24 hours prior to the final cleaning of the groove and application of the pavement marking material.

PAVEMENT GROOVING: Grooving shall not cause ravels, aggregate fractures, spalling or disturbance of the joints to the underlying surface of the pavement. Grooves shall be cut into the pavement prior to the application of the pavement marking material. Grooves shall be cut such that the width is 1 inch greater than the width of the pavement marking **line as specified on the plans**. Grooves for letters and symbols shall be cut in a square or rectangular shape so that the entire marking will fit within the limits of the grooved area.

The position of the edge of the grooves shall be a minimum of 2 inches from the edge of all longitudinal joints. The Contractor shall achieve straight alignment with the grooving equipment.

The depth of the groove shall not be less than the manufacturer's recommendations for the pavement marking material specified, but shall be installed to a minimum depth of 120 mils ± 10mils from the pavement surface or, if tined, from the high point of the tined surface. To measure the depth, the contractor may use a depth plate placed in the groove and a straightedge placed across the plate and groove, or the contractor may use a straightedge placed perpendicular to the groove. The Engineer may periodically check groove depths. The cutting head shall be operated at the appropriate speed in order to prevent undulation of the cutting head and grooving at an inconsistent depth.

At the start of grooving operations, a 50 ft test section shall be installed and depth measurements shall be made at 10 ft intervals within the test section. The individual depth measurements shall be within the allowable ranges according to this Special Provision. If it is determined the test section has not been grooved at the appropriate depth or texture, adjustments shall be made to the cutting head and another 50 ft test section shall be installed and checked. This process shall continue until the test section meets the requirements of this Special Provision.

FINAL CLEANING

New HMA - Use a high-pressure air blower with at least 185 ft³/min air flow and 120 psi air pressure to clean the groove.

THERMOPLASTIC PAVEMENT MARKING APPLICATION

Apply the thermoplastic pavement markings according to Section 780 of the "Standard Specifications" and the following:

**SPECIAL PROVISIONS
MCHENRY COUNTY
Section 21-00530-00-PP**

The equipment used to apply thermoplastic pavement markings, under this contract, shall be limited to hand-operated equipment only. Truck-mounted equipment shall not be used.

Method of Measurement: Lines will be measured for payment in place in feet. Double yellow lines will be measured as two separate lines.

Words and symbols shall conform to the sizes and dimensions specified in the Illinois Manual on Uniform Traffic Control Devices and IDOT standard 780001. They will be measured based on the total areas indicated in Table 1 of Section 780 of the "Standard Specifications" or as indicated on the plans.

Basis of Payment: This work will be paid for at the contract price per foot of applied **GROOVED THERMOPLASTIC PAVEMENT MARKING – LINE** of the width specified; and/or per square foot for **GROOVED THERMOPLASTIC PAVEMENT MARKING – LETTERS AND SYMBOLS**. The unit price shall include all equipment, materials and labor required to furnish, groove and install the thermoplastic pavement markings.

KEEPING ROADWAYS OPEN TO TRAFFIC

All roads shall remain open to traffic and Flaggers shall be present when work is being performed. The Contractor shall obtain, erect, maintain, and remove all signs, barricades, flaggers, and other traffic control devices as may be necessary for the regulating, warning, or guiding of traffic. Placement and maintenance of traffic control devices shall be as directed by the Engineer in accordance with the applicable parts of Article 107.14 of the Standard Specifications. All traffic control will be considered as incidental to the contract.

GENERAL AREA CLEANUP


The Contractor shall be responsible for disposing of all surplus materials or construction debris related to the job. The Contractor shall also be responsible for any refuse that was discarded by the crews during the paving project.

LIEN WAIVERS

End of contract final waivers from all sub-contractors and material suppliers that perform work or provide materials under this contract must be submitted before final payment shall be made.

RAILROAD CROSSING NOTIFICATION

The Railroad Tracks located on Oak Grove road are owned and operated by the DeLong Corporation Inc., which owns the grain depot on White Oaks road. The Contractor shall notify the owners, at the grain depot, when any work shall be close to these railroad tracks so the owner shall be aware of the work and inform the Contractor of any traffic that will be on these tracks during the planned work. The contacting of the owner of the railroad tracks shall be incidental to this contract and no cost shall be related to it.

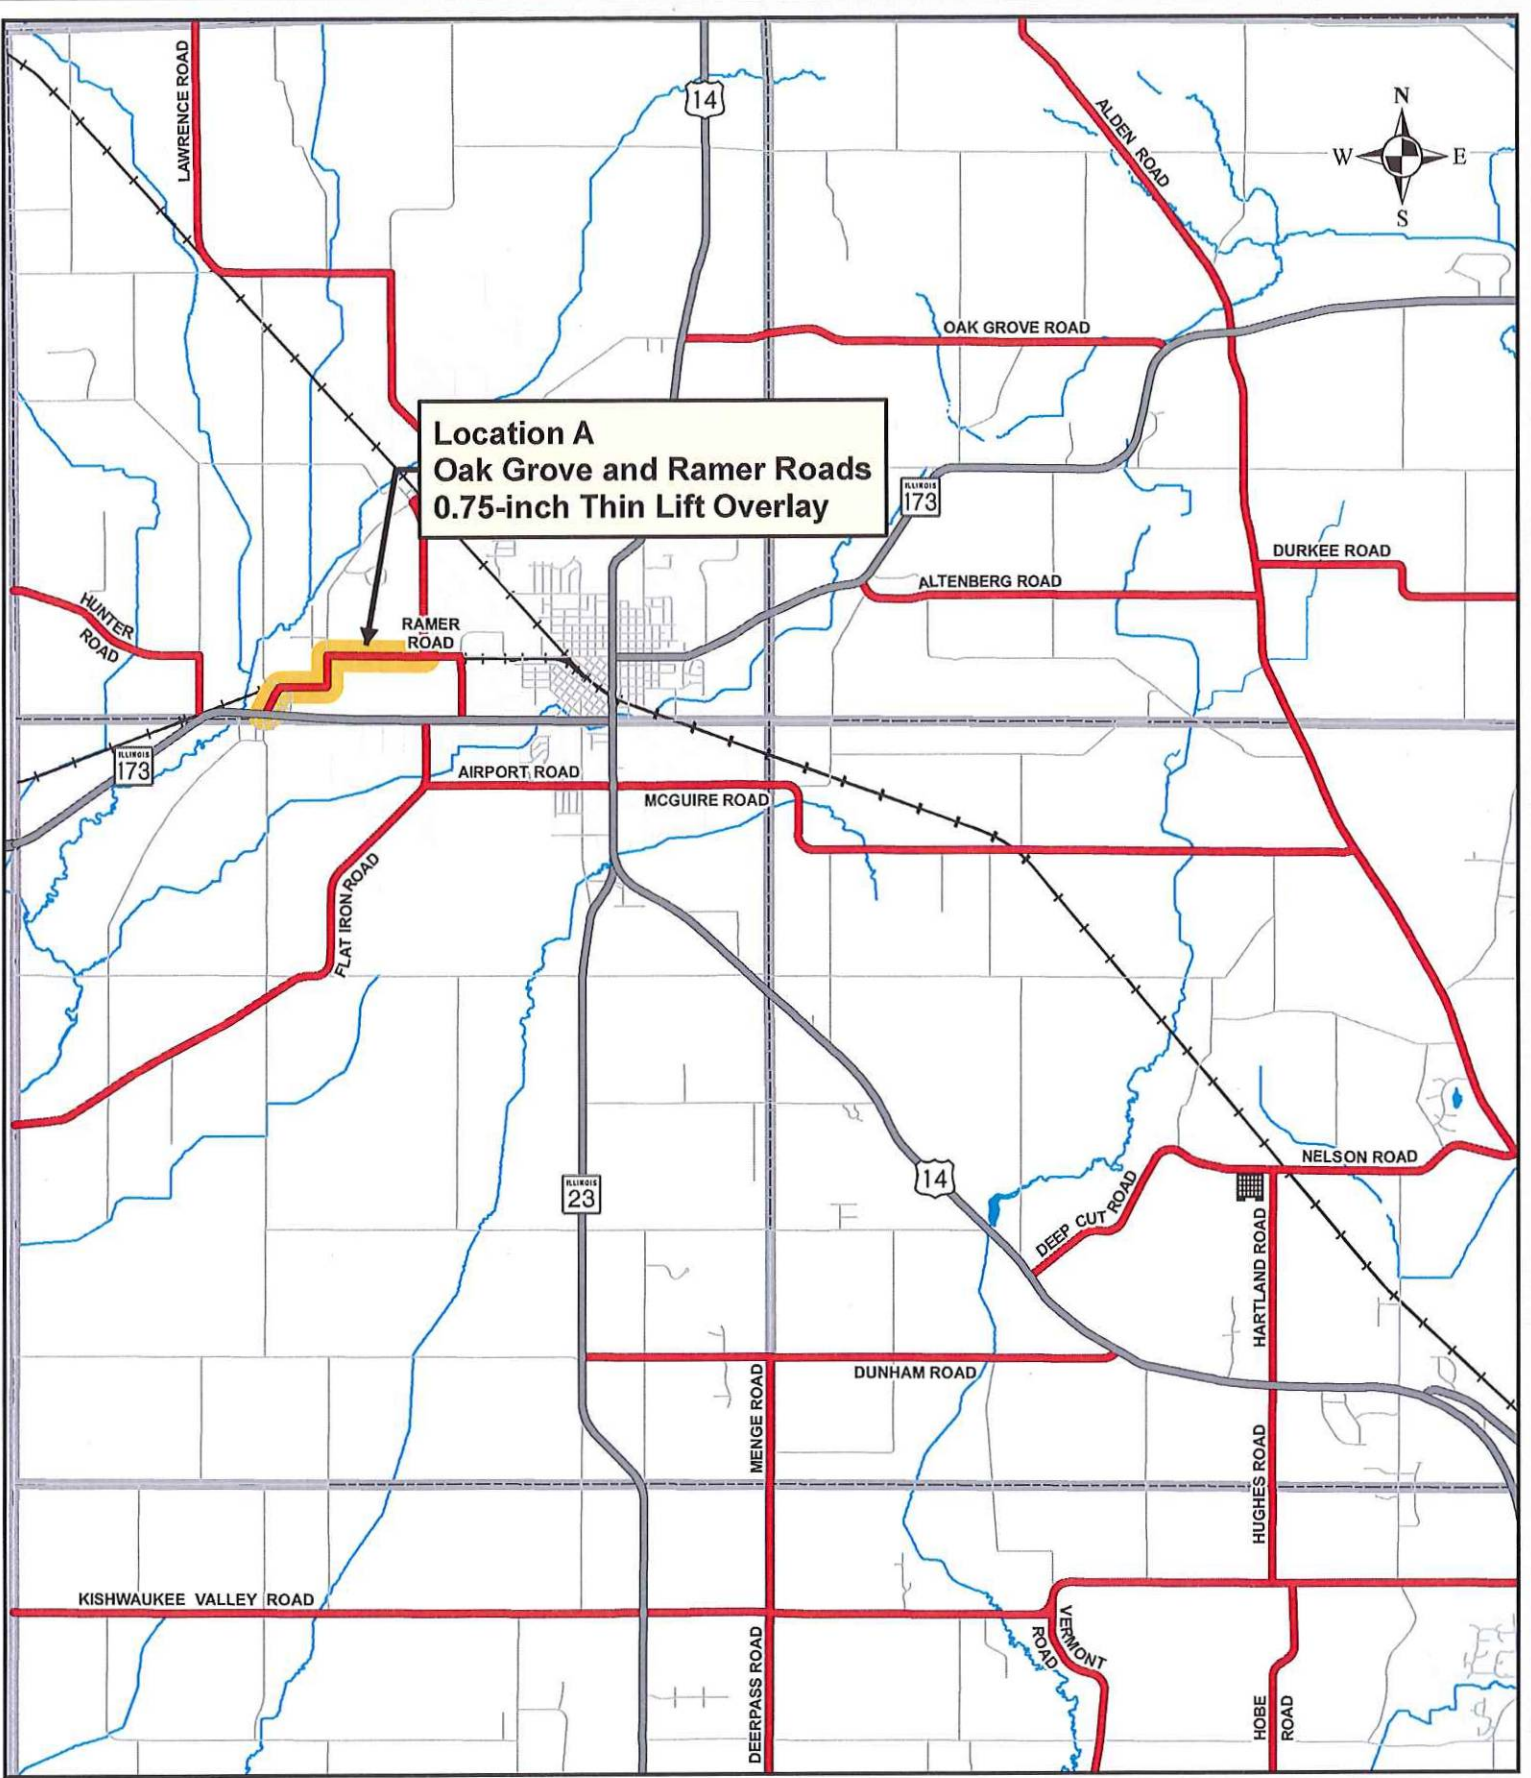

Location A
Oak Grove and Ramer Roads
0.75-inch Thin Lift Overlay

DISCLAIMER
 Information on this map may contain inaccuracies or typographical errors. Information may be changed or updated without notice. Information on this map is provided "as-is" without warranty of any kind, either express or implied, including (without limitation) any implied warranties of merchantability or fitness for a particular purpose. In no event will McHenry County be liable to you or to any third party for any direct, indirect, incidental, consequential, special or exemplary damages or lost profits resulting from any use or misuse of this information. Information herein has been reproduced from original sources. Information produced on this map should not be used in place of a survey or legal documents.

DATE
 Thursday, March 18, 2021

FILE
 2021 Thin Lift

PROJECTION
 Transverse Mercator
 NAD 1983 State Plane
 Illinois East

BASE MAP		TREATMENT	
	County Route		0.75-inch Thin Lift Overlay
	State/US Route		
	Interstate Route		
	Munic/Twp Route		
	Rail Road		
	Hydrography		
		SCALE	
		1 in = 2 mile	

2021 PAVEMENT PRESERVATION PROGRAM



PROJECT SUMMARY

McHenry County
Section 21-00530-00-PP
Ramer/Oak Grove Roads

Project	Begin Point	End Point	Length (ft)	Paving Width (ft)	Improvements
Location A Ramer/Oak Grove	Lawrence Rd.	IL 173	8,910	24.8 to 44	HMA 9.5 Surf. Cse. FG (TLO), N50 - (1 - 0.75" Lift), HMA Surface Removal - Butt Joint, Agg. Shoulders Type B, (Special), HMA Surf. Rem. Special - Butt Joints, Recessed Reflective Pav. Markers Remove & Install Short Term P.M., Grooved Thermo Striping, ADA Detectable insta.

Summary of Quantities

COUNTY: McHenry
SECTION: 21-00530-00-PP

Item No.	Code Number	Description	Unit	Total Quantity	Quantities	
					Loc. "A"	Ramer/Oak Grove
1	05640613	BITUMINOUS MATERIALS - THIN LIFT (TACK COAT)	POUND	32,000.0		32,000.0
2	05640614	HMA IL 9.5 SURFACE COURSE FG - TLO 3/4"	TON	1,600.0		1,600.0
3	44201723	CLASS D PATCHES, TYPE IV, 6 INCH	SQ.YD	100.0		100.0
4	X4811300	AGGREGATE SHOULDERS, TYPE B (SPECIAL)	TON	500.0		500.0
5	X7010216	TRAFFIC CONTROL AND PROTECTION, (SPECIAL)	L SUM	1.0		1.0
6	05640604	CONSTRUCTING TEST STRIP - THIN LIFT	EACH	1.0		1.0
7	05670301	SHORT TERM PAVEMENT MARKING (SPECIAL)	FOOT	3,200.0		3,200.0
8	05678001	GROOVED THERMOPLASTIC PAVT MARK - L&S	SQ.FT	158.8		158.8
9	05678002	GROOVED THERMOPLASTIC PAVT MARK - LINE 4"	FOOT	28,950.0		28,950.0
10	05678003	GROOVED THERMOPLASTIC PAVT MARK - LINE 6"	FOOT	300.0		300.0
11	05678004	GROOVED THERMOPLASTIC PAVT MARK - LINE 8"	FOOT	100.0		100.0
12	05678005	GROOVED THERMOPLASTIC PAVT MARK - LINE 12"	FOOT	250.0		250.0
13	05678006	GROOVED THERMOPLASTIC PAVT MARK - LINE 24"	FOOT	82.0		82.0
14	X7810300	RECESSED REFLECTIVE PAVTMENT MARKER	EACH	250.0		250.0
15	00564016	RECESSED PAVTMENT MARKER REMOVAL	EACH	250.0		250.0
16	40600982	HOT-MIX ASPHALT SURFACE REMOVAL - BUTT JOINT	SQ.YD	1,600.0		1,600.0
17	05640611	MIX DESIGN - HMA MIXTURE IL 9.5 FG - TLO	L SUM	1.0		1.0
18	05640615	HMA CORING	EACH	8.0		8.0
19	5640617	PORTLAND CEMENT CONCRETE SIDEWALK - 4"	CU.YD	2.0		2.0
20	42400800	DETECTABLE WARNINGS	SQ.FT	40.0		40.0
21	35100500	AGGREGATE BASE COURSE, TYPE A 6"	SQ.YD	15.0		15.0
22	20200100	EARTH EXCAVATION	CU.YD	3.0		3.0


Grooved Thermoplastic Pavement Marking Schedule
Thin Lift Overlay
McHenry County Division of Transportation

Location	Removal (sqft)	L&S (sqft)	Pavement Marking Lines-Variou (lin ft)					L&S Summary		
			4"	6"	8"	12"	24"	Only	Arrow	RR Crossing (2-R's and X)
Oak Grove Road, IL Route 173 to Ramer Road		158.80	18,084	300		250	82	1	1	2
Ramer Road, Oak Grove Road to Lawrence Road			10,866		100					
Total		158.80	28,950	300	100	250	82			

MCHENRY COUNTY RESURFACING PROGRAM

HMA THIN LIFT OVERLAY

2021

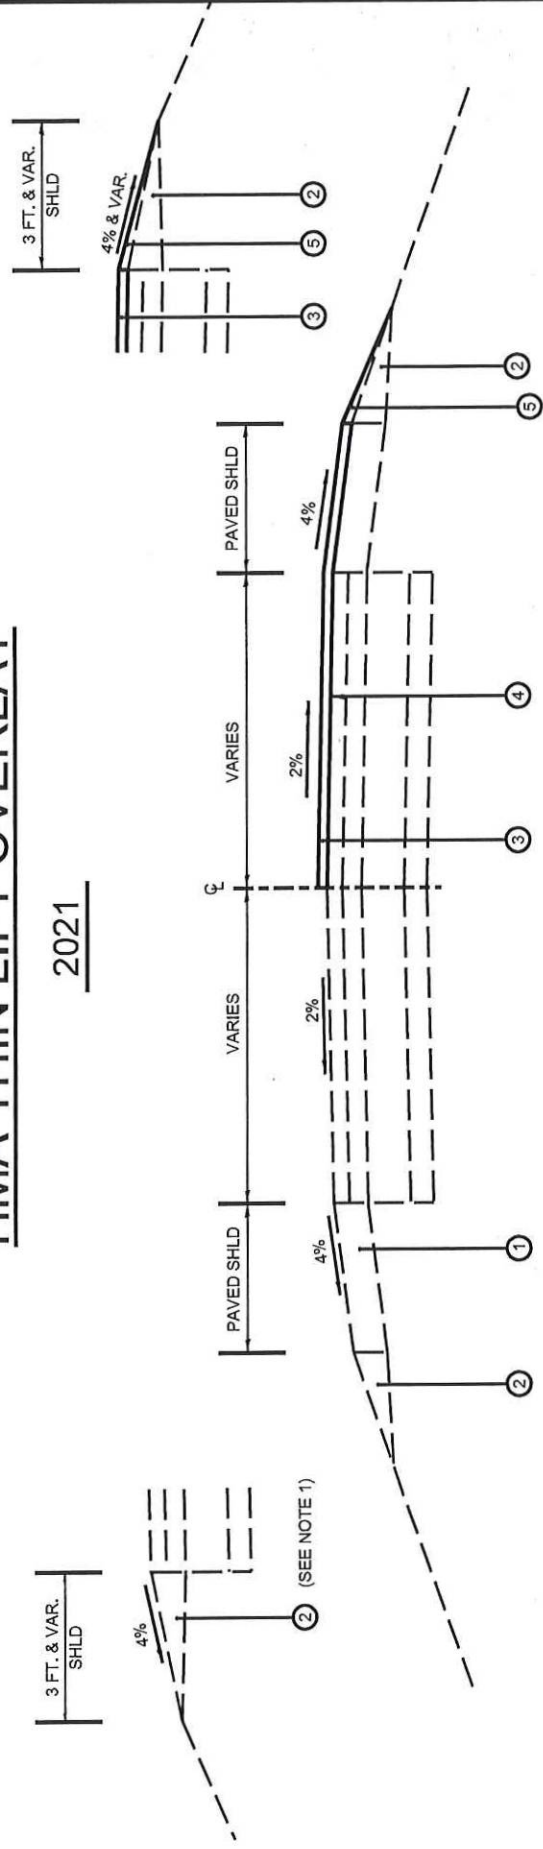

Ramer/Oak Grove
IL 9.5 Surf. Cse. FG N50

LEGEND

- 1 EXISTING HOT-MIX ASPHALT SHOULDERS
- 2 EXISTING AGGREGATE SHOULDERS
- 3 PROPOSED HOT-MIX ASPHALT THIN LIFT OVERLAY, HMA N50 - 0.75"
- 4 PROPOSED BITUMINOUS MATERIALS (PRIME COAT)
- 5 PROPOSED AGGREGATE SHOULDERS, TYPE B, (SPECIAL)

NOTE: CONTRACTOR SHALL MILL BEFORE PATCHING.


HOT-MIX ASPHALT MIXTURE REQUIREMENTS	
MIXTURE TYPE	AIR VOIDS

THE UNIT WEIGHT USED TO CALCULATE ALL HMA SURFACE MIXTURE QUANTITIES IS 112 LBS/SSD YD³.
THE "AC TYPE" FOR POLYMERIZED HMA MIXES SHALL BE "SSBSR PG70-22" AND NON-POLYMERIZED HMA
THE "AC TYPE" SHALL BE " " UNLESS MODIFIED BY DISTRICT ONE SPECIAL PROVISIONS. FOR
"PERCENT OF RAP" SEE DISTRICT ONE SPECIAL PROVISIONS.

FILE NAME SHEET NO.	REVISIONS REVISION REVISION REVISION	MCHENRY COUNTY HMA THIN LIFT OVERLAY TYPICAL SECTION	STATE OF ILLINOIS MCHENRY COUNTY DIVISION OF TRANSPORTATION	PROJECT NO. OF SHEETS 154 OF 200	SHEET NO. 154 OF 200
------------------------	---	--	--	--	-------------------------------

MCHENRY COUNTY RESURFACING PROGRAM

2021

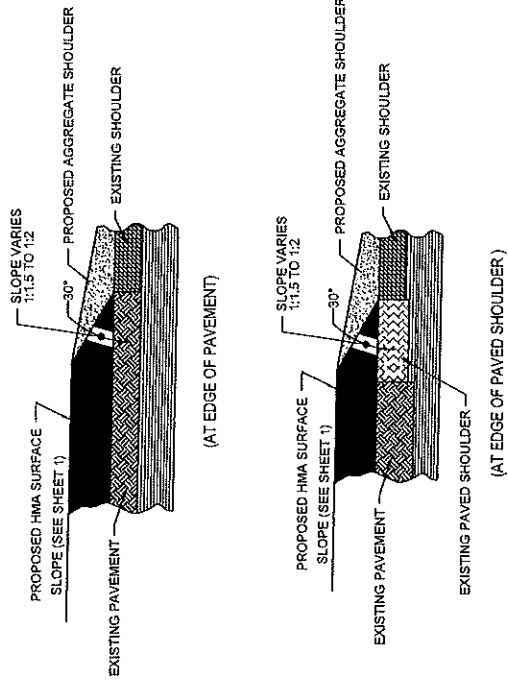

SAFETY EDGE DETAILS

SAFETY EDGE TREATMENT SHALL BE APPLIED TO PAVED SHOULDER OF 1 FT. OR LESS THAT IS ADJACENT TO AGGREGATE/EARTH SHOULDER.

HOT-MIX ASPHALT MIXTURE REQUIREMENTS

MIXTURE TYPE	AIR VOIDS
HOT-MIX ASPHALT SURFACE COURSE, MIX "D",	4% @ GYR.
HOT-MIX ASPHALT BINDER COURSE, IL-19.0,	4% @ GYR.
CLASS D PATCHES (HMA BINDER IL-19mm)	4% @ GYR.
HMA REPLACEMENT OVER PATCHES (HMA BINDER IL-19mm)	4% @ GYR.
LEVELING BINDER (MACHINE METHOD)	4% @ GYR.
LEVELING BINDER (HAND METHOD)	4% @ GYR.
HMA SURFACE COURSE IL9.5 N60 FG - 0.75"	3.5% @ 60 GYR
CLASS D PATCHES (HMA SURFACE COURSE, MIX D - 6")	4% @ 70 GYR

NOTES:
 CONTRACTOR SHALL MILL BEFORE PATCHING.
 ONLY THE CHECKED MIXTURE TYPE(S) IS/ARE APPLICABLE TO THE PROJECT.


THE UNIT WEIGHT USED TO CALCULATE ALL HMA SURFACE MIXTURE QUANTITIES IS 112 LBS/SQ YD/IN.
 THE "AC TYPE" FOR POLYMERIZED HMA MIXES SHALL BE "SBS/SBR PG76-22" AND FOR NON-POLYMERIZED HMA
 THE "AC TYPE" SHALL BE "PG 58-28" UNLESS MODIFIED BY DISTRICT ONE SPECIAL PROVISIONS.
 FOR USE OF RECYCLED MATERIALS SEE SPECIAL PROVISIONS.

DESIGNED - DRAWN - CHECKED - DATE -	REVISION / REMARKS NO. DESCRIPTION 1. Revised Safety Edge Details. DATE 7/28/17 BY CL	STATE OF ILLINOIS MCHENRY COUNTY DIVISION OF TRANSPORTATION	MCHENRY COUNTY RESURFACING TYPICAL SECTION	ROUTE	SECTION NUMBER 21-00530-00-PP	SHEET NO. OF 2 SHEETS SHEET 2 OF 2	TOTAL SHEETS 2
--	--	---	--	-------	----------------------------------	---------------------------------------	-------------------




McHenry County Division of Transportation


Joseph R. Korpalski, Jr., P.E.
Director of Transportation/County Engineer

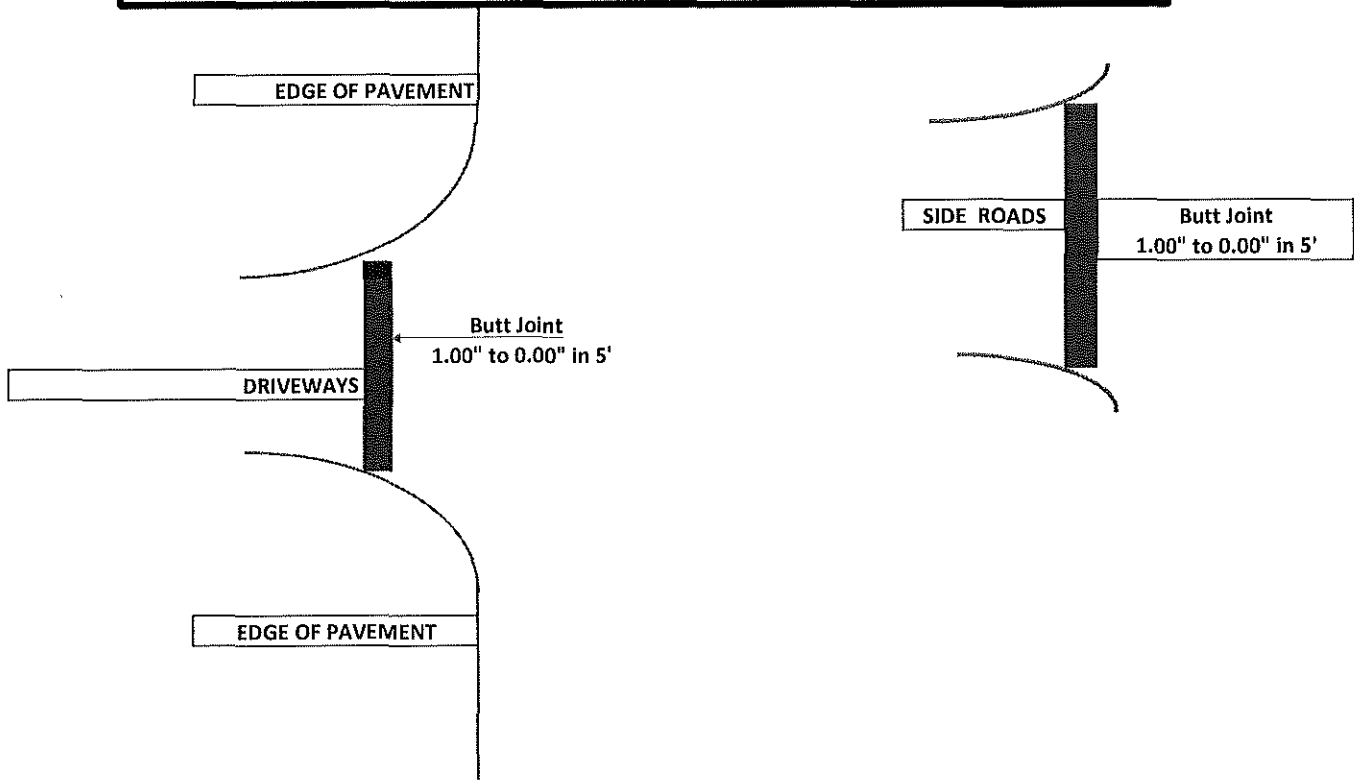

CURB LINE BUTT JOINT

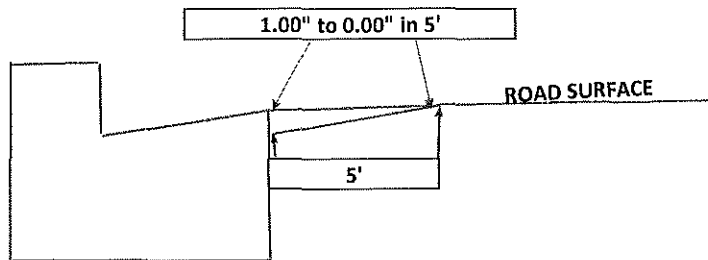

SECTION # 21-00530-00-PP
MCDOT STANDARD
BUTT JOINT

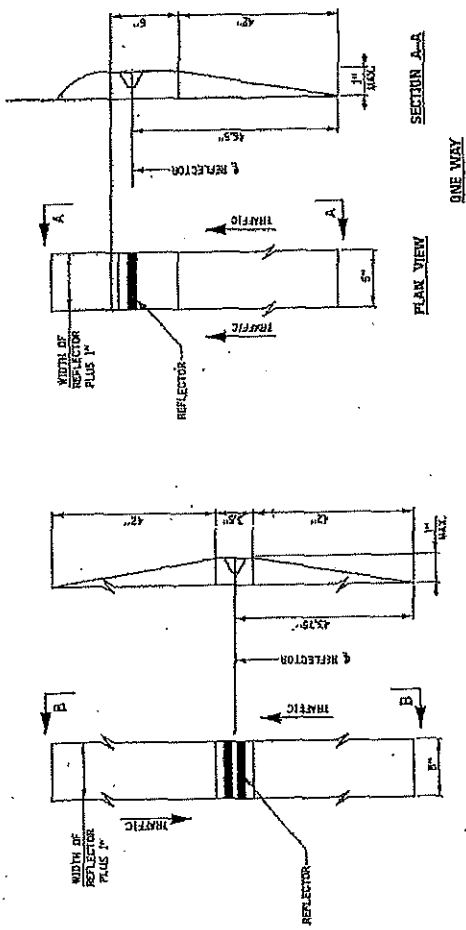

RECESSED REFLECTIVE MARKERS


INSTALLATION NOTES

1. SAND/FILL IN DIMENSIONS SHOWN.
2. SAND/FILL AREAS TO BE DRY AND FREE OF MATERIAL THAT ADVERSELY AFFECTS THE ADHESIVE BOND.
3. INSTALL THE REFLECTOR WITH AN APPROVED TWO-COMPONENT EPOXY ADHESIVE. EPXY SHOULD NOT OBSCURE OR BLOCK THE LENS.
4. INSTALL TOP OF REFLECTOR 1/2 TO 3/4 INCH BELOW THE PAVEMENT SURFACE.
5. REFLECTOR SHALL BE M SERIES 280.

GENERAL NOTES

1. INSTALLATION SHALL CONFORM TO DOT HIGHWAY STANDARD TR001-02 OR LATEST FOR MARKER PLACEMENT.
2. DOT STANDARD TR001-02 SHALL BE MODIFIED TO REFLECT IN RECESSED PAVEMENT MARKERS INSTEAD OF RAISED PAVEMENT MARKERS.

SHEET NO. 1 OF 1	DATE 11/15/11	DRAWN J. W. BROWN	CHECKED J. W. BROWN	REVISIONS 1. REVISED 11/15/11	RECESSED PAVEMENT MARKER DETAIL		COUNTY MICHIGAN	SHEET NO. 1 OF 1
					PROJECT NO. 11-0000000000		SECTION 11-0000000000	CONTRACT NO. 11-0000000000
MICHIGAN COUNTY DIVISION OF TRANSPORTATION					SCALE 1" = 1'-0"			

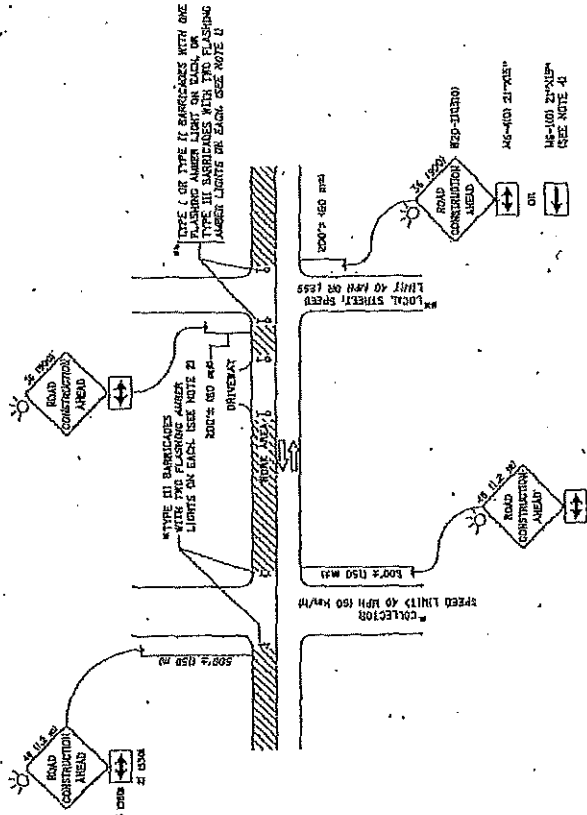


NOTES:

1. SIDE ROAD WITH A SPEED LIMIT OF 40 MPH (64 KM/H) OR LESS AS SHOWN ON THE DRAWING AND AS DIRECTED BY THE ENGINEER.
 - a) ONE ROAD CONSTRUCTION AHEAD SIGN AS SHOWN WITH A FLASHER MOUNTED ON IT APPROXIMATELY 200 FEET (61 M) IN ADVANCE OF THE MAIN ROUTE.
 - b) THE CLOSED PORTION OF THE MAIN ROUTE SHALL BE PROTECTED BY TYPE III BARRICADES WITH ONE FLASHING RED LIGHT ON EACH SIDE AND ONE FLASHING RED LIGHT ON EACH END. SEE NOTE 1.
2. SIDE ROAD WITH A SPEED LIMIT GREATER THAN 40 MPH (64 KM/H) AS SHOWN ON THE DRAWING AND AS DIRECTED BY THE ENGINEER.
 - a) ONE ROAD CONSTRUCTION AHEAD SIGN AS SHOWN WITH A FLASHER MOUNTED ON IT APPROXIMATELY 200 FEET (61 M) IN ADVANCE OF THE MAIN ROUTE.
 - b) THE CLOSED PORTION OF THE MAIN ROUTE SHALL BE PROTECTED BY TYPE III BARRICADES WITH ONE FLASHING RED LIGHT ON EACH SIDE AND ONE FLASHING RED LIGHT ON EACH END. SEE NOTE 1.
3. CONES MAY BE SUBSTITUTED FOR BARRICADES OR DRUMS AT HALF THE SPACING DURING DAY OPERATIONS. CONES SHALL BE A MINIMUM OF 24 INCHES (61 CM) IN HEIGHT.
4. WHEN THE SIDE ROAD LIES BETWEEN THE BEGINNING OF THE MARKLINE STOPPING AND THE WORK ZONE, A SINGLE HEADED ARROW (W-11) SHALL BE USED IN LIEU OF THE DOUBLE HEADED ARROW (W-14).

All dimensions in inches (millimeters) unless otherwise shown.

5. WHEN WORK IS BEING PERFORMED ON A SIDE ROAD OR DRIVEWAY, FOLLOW THE APPLICABLE STANDARDS. THE DIRECTIONAL ARROW (W-11) OR (W-14) SHALL BE COVERED OR REMOVED. WORK NO LONGER CONSISTENT WITH THE TRAFFIC CONTROL SET-UP.
6. ADVANCE WARNING SIGNS ARE TO BE OBTAINED ON DRIVEWAYS UNLESS OTHERWISE SPECIFIED IN THE PLANS OR BY THE ENGINEER.
7. THE TRAFFIC CONTROL AND PROTECTION FOR SIDE ROADS, INTERSECTIONS, AND DRIVEWAYS SHALL BE INCLUDED IN THE COST OF SPECIFIED TRAFFIC CONTROL STANDARDS ON THESE SHEETS.

STATE OF ILLINOIS		TRAFFIC CONTROL AND PROTECTION FOR	
DEPARTMENT OF TRANSPORTATION		SIDE ROADS, INTERSECTIONS, AND DRIVEWAYS	
SCALE: HORIZ. 1" = 100'	SCALE: VERT. 1" = 20'	SHEET NO. 1	OF 1 SHEETS TOTAL
DESIGNED BY: J. R. HENNING	CHECKED BY: J. R. HENNING	DATE: 08-13	BY: J. R. HENNING
DRAWN BY: J. R. HENNING	CHECKED BY: J. R. HENNING	DATE: 08-13	BY: J. R. HENNING
PROJECT NO. 11-00-00	CONTRACT NO. 11-00-00	SHEET NO. 1 OF 1	

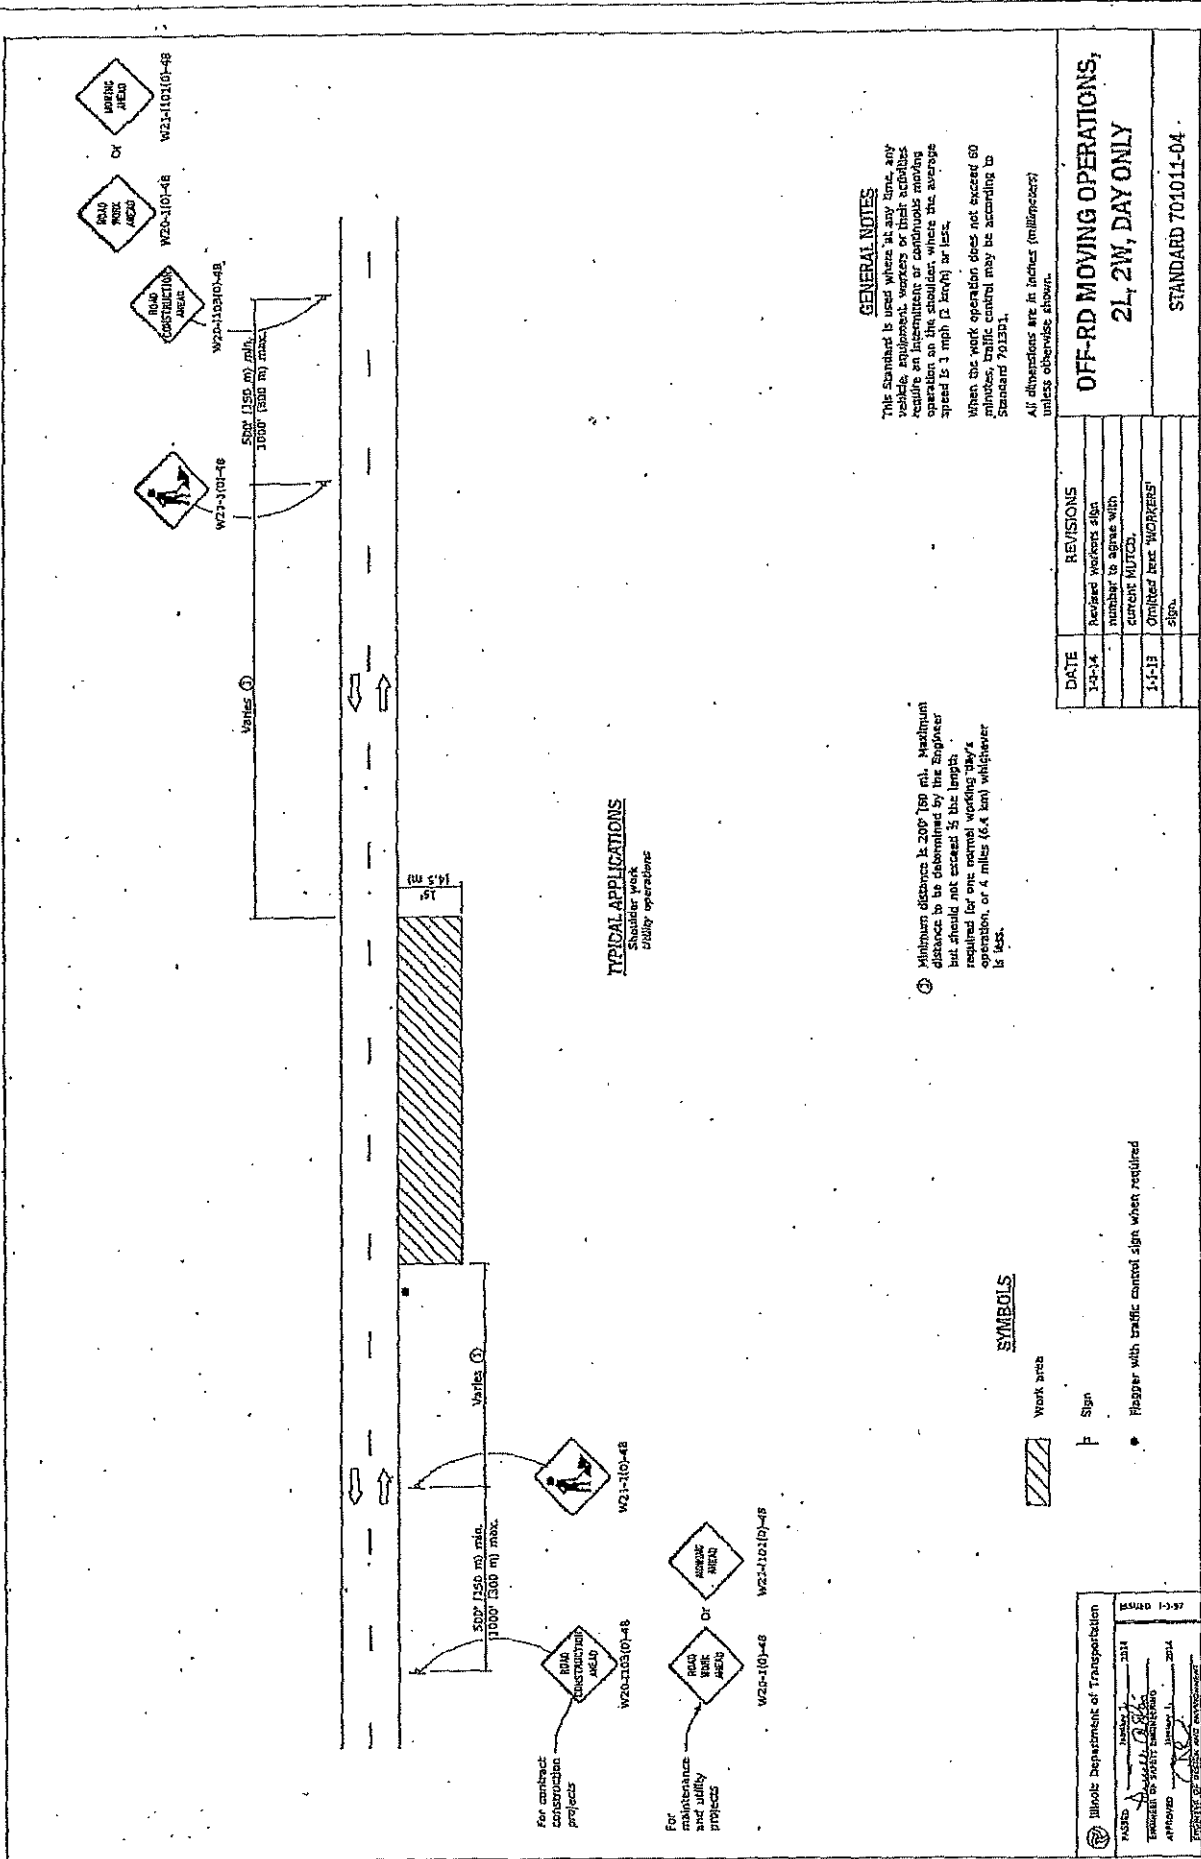

TYPICAL APPLICATIONS
 Shoulder work
 Utility operations

GENERAL NOTES

This Standard is used where it may be necessary to use intermittent or continuous moving operation on the shoulder, where the average speed is 1 mph (1.6 km/h) or less. When the work operation does not exceed 60 minutes, traffic control may be according to Standard 701301.

All dimensions are in inches (millimeters) unless otherwise shown.

Minimum distance is 200' (60 m). Maximum distance to be determined by the Engineer but should not exceed 5 times length required for one normal working day operation, or 4 miles (6.4 km) whichever is less.

**OFF-ROAD MOVING OPERATIONS,
 2L, 2W, DAY ONLY**
 STANDARD 701011-04

DATE	REVISIONS
1-1-14	Revised work area sign number to agree with current MUTCD.
1-1-13	Original text "WORKERS" sign.

SYMBOLS

- Work area
- Sign
- Flagger with traffic control sign when required

Illinois Department of Transportation

ASST. DIRECTOR

APPROVED

DATE


PROJECT NO.

DATE

PROJECT NO.

DATE

PROJECT NO.

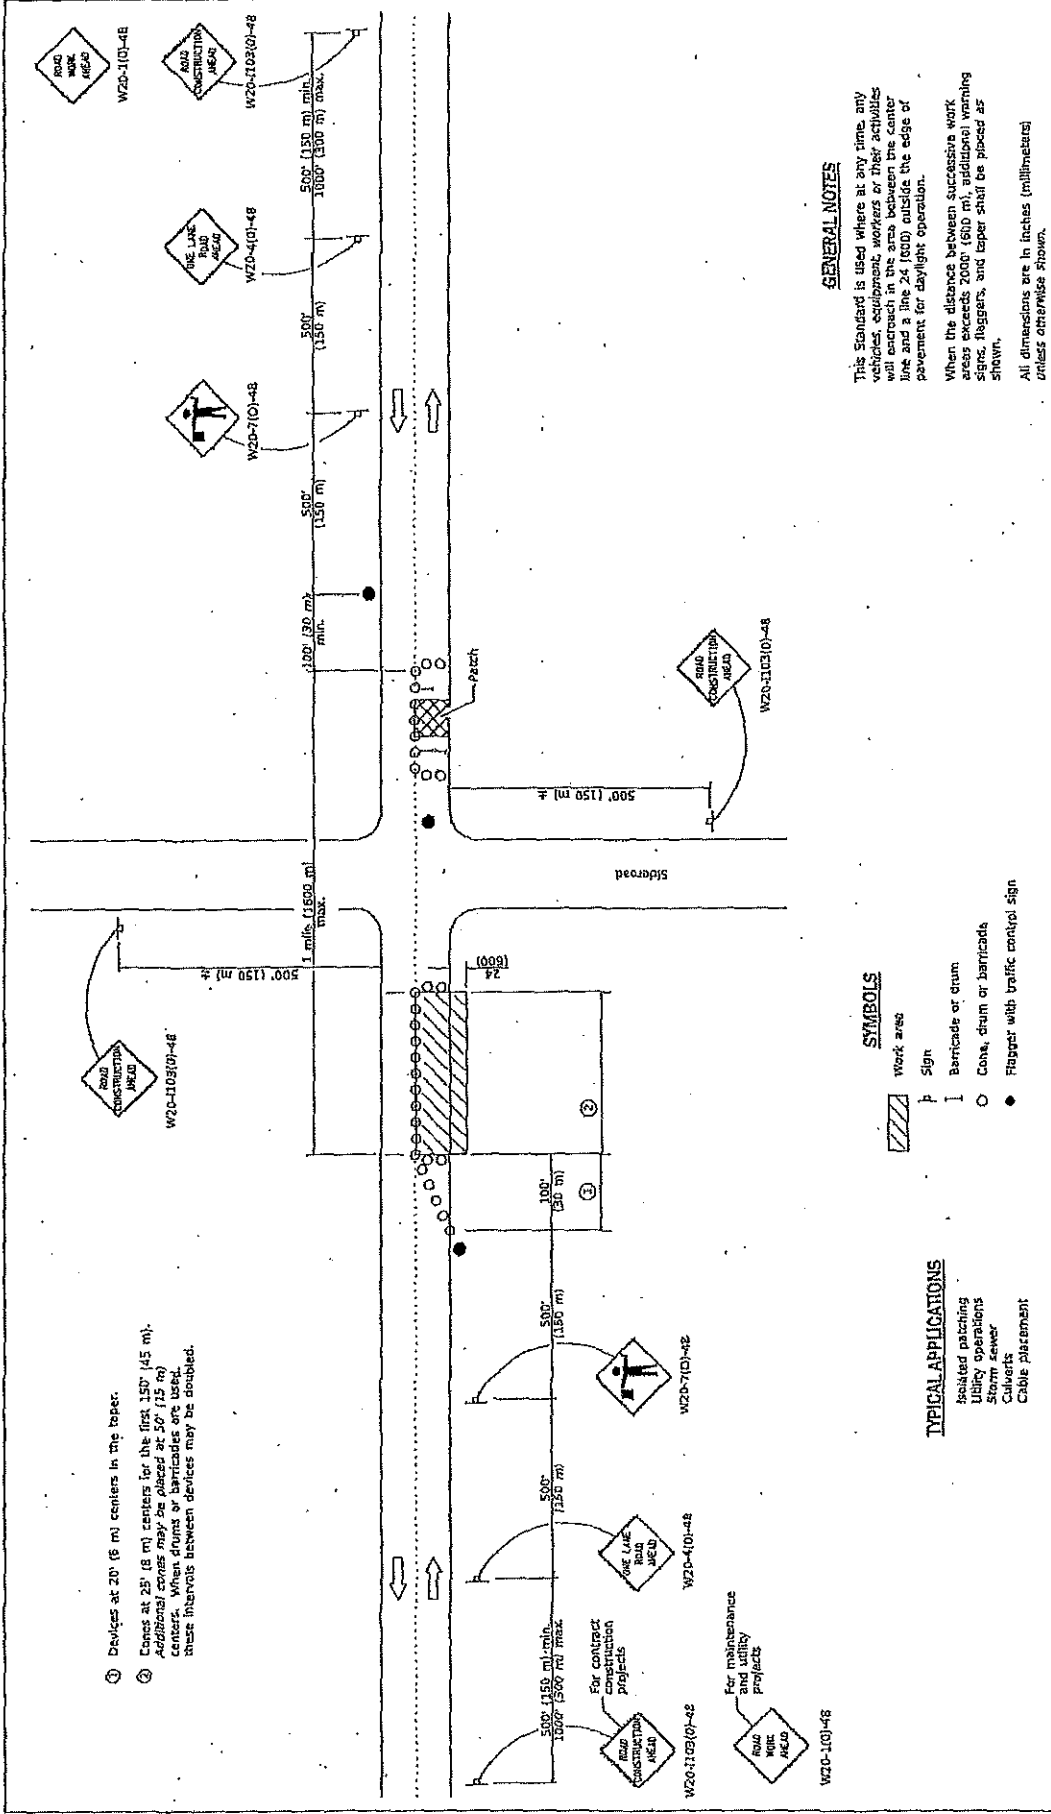

- ① Devices at 20' (6 m) centers in the taper.
- ② Cones at 25' (8 m) centers for the first 150' (45 m). Additional cones may be placed at 50' (15 m) centers, when drums or barricades are used, these intervals between devices may be doubled.

GENERAL NOTES

This Standard is used where at any time, any vehicles, equipment, workers or their activities will encroach in the area between the center line and a line 24' (800) outside the edge of pavement for daylight operation.

When the distance between successive work areas exceeds 2000' (600 m), additional warning signs, flaggers, and taper shall be placed as shown.

All dimensions are in inches (millimeters) unless otherwise shown.

SYMBOLS

- Work area
- Sign
- Barricade or drum
- Cones, drum or barricade
- Flagger with traffic control sign

TYPICAL APPLICATIONS

- Assisted patching
- Utility operations
- Sign placement
- Culverts
- Cable placement

DATE		REVISIONS
1-1-19		Revised device spacing in taper.
1-1-11		Revised flagger sign.

**LANE CLOSURE, 2L, 2W,
DAY ONLY,
FOR SPEEDS ≥ 45 MPH**

STANDARD 701201-05.


Illinois Department of Transportation

APPROVED: [Signature] DATE: 2019

DESIGNED BY: [Signature] PROJECT AND ENGINEERING

APPROVED: [Signature] DATE: 2019

REVISIONS OF ORIGINAL DOCUMENT

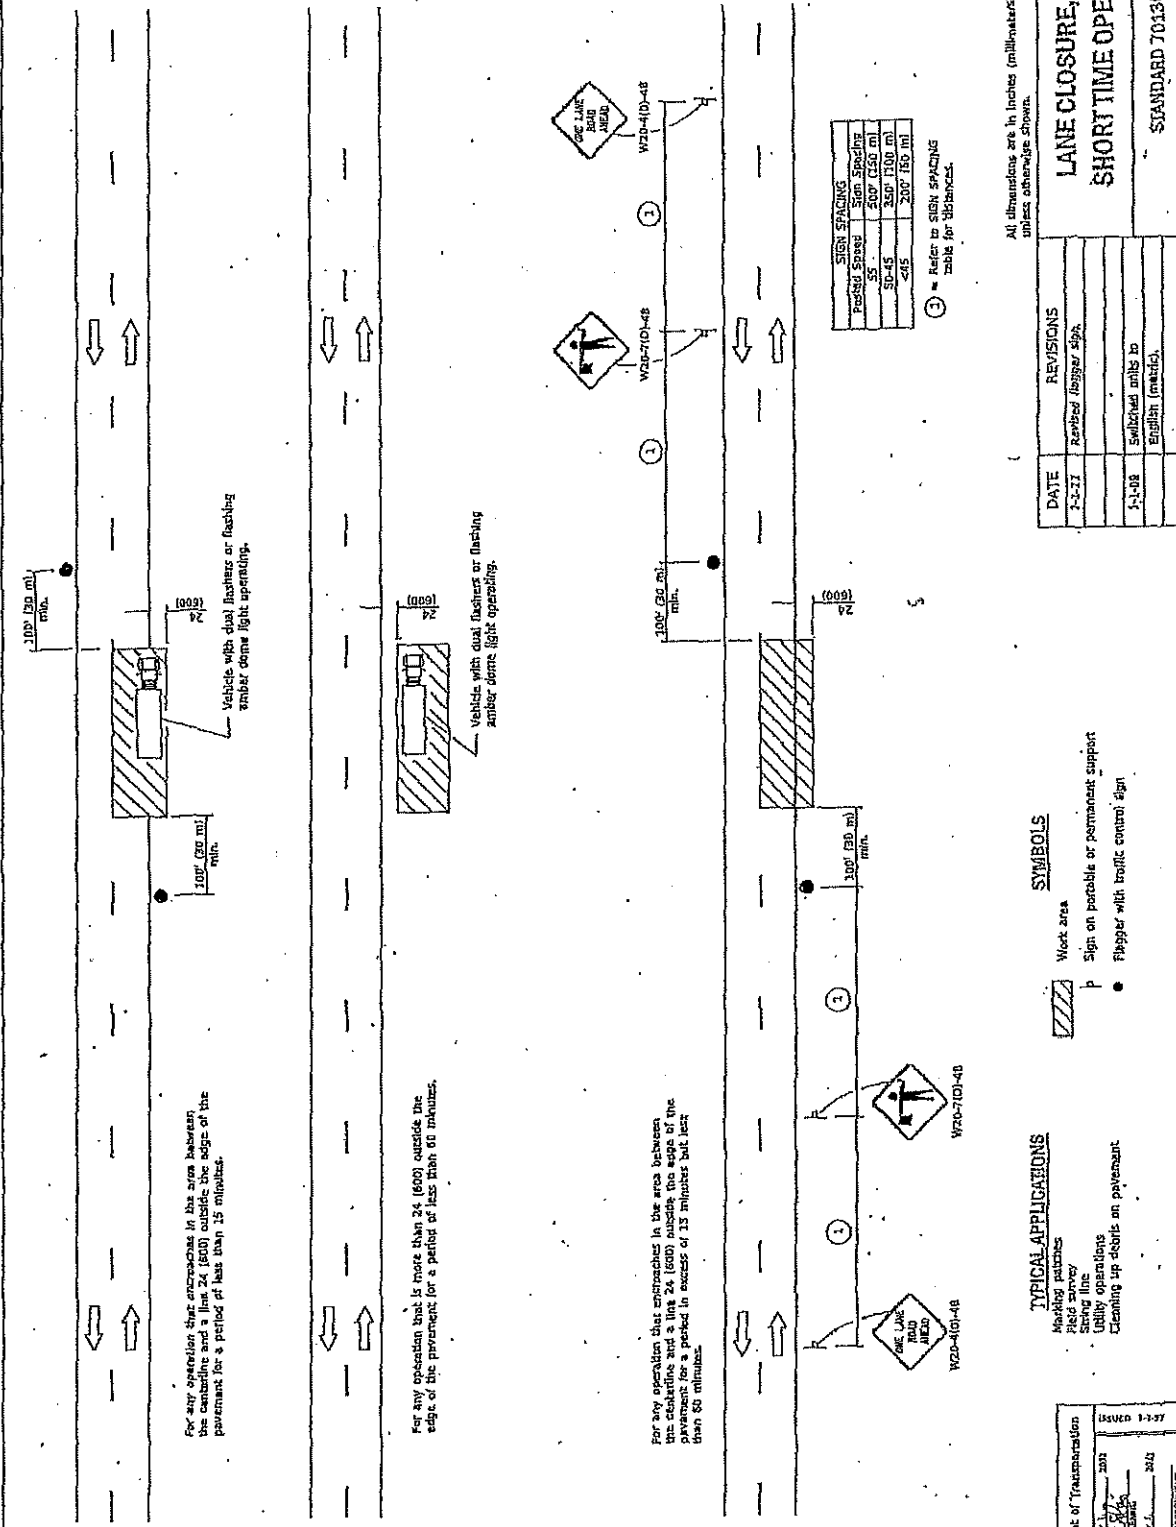

For any operation that encroaches in the area between the centerline and a line 24 (600) outside the edge of the pavement for a period of less than 15 minutes.

For any operation that is more than 24 (600) outside the edge of the pavement for a period of less than 60 minutes.

For any operation that encroaches in the area between the centerline and a line 24 (600) outside the edge of the pavement for a period in excess of 15 minutes but less than 60 minutes.

SIGN SPACING	
POSTING SPACING	Sign Spacing
W	200' (60 m)
S	100' (30 m)
SA	50' (15 m)
SA-S	200' (60 m)

① Refer to SIGN SPACING table for distances.

All dimensions are in inches (millimeters) unless otherwise shown.

LANE CLOSURE, 2L, 2W, SHORT TIME OPERATIONS

STANDARD 701301-04

TYPICAL APPLICATIONS

- Marking patches
- Field survey
- String line
- Utility operations
- Cleaning up debris on pavement

SYMBOLS

- Work area
- Sign on portable or permanent support
- Flagger with traffic control sign


REVISIONS

DATE	REVISIONS
7-2-77	Revised (Rogger sign)
1-1-08	Substituted units to English (metric)

Illinois Department of Transportation
 DIVISION OF HIGHWAYS
 OFFICE OF PROJECT MANAGEMENT
 MEMBER OF ILLINOIS STATE TRANSPORTATION

ISSUED 1-3-97

PROJECT: *1000*
 DRAWING: *1000*
 APPR: *[Signature]*
 CHECK: *[Signature]*

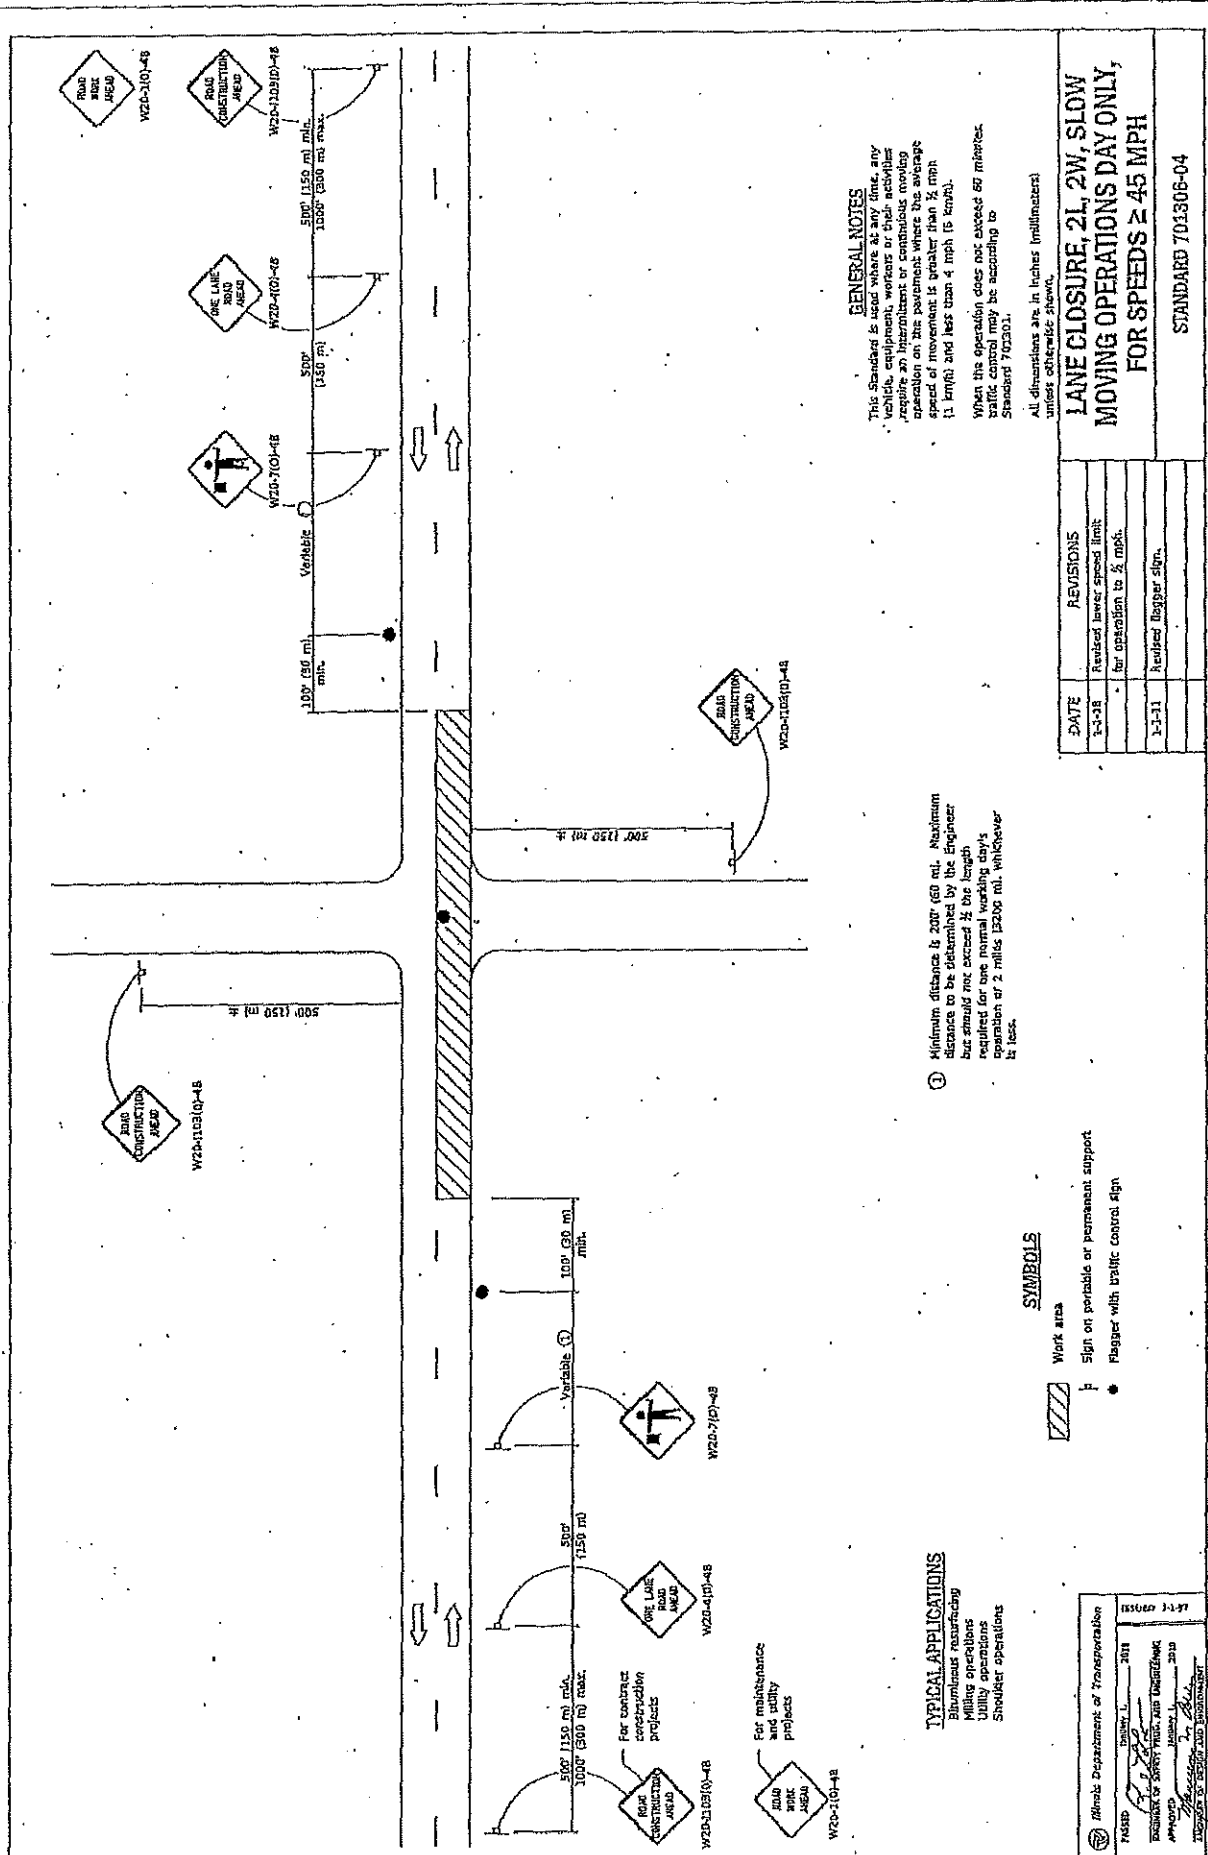

GENERAL NOTES
 This Standard is used where at any time, any vehicle, equipment, workers or their activities require an intermittent or continuous moving operation on the pavement whose average speed of movement is greater than 1/2 mph (1 km/hr) and less than 4 mph (6 km/hr).
 When the operation does not exceed 60 minutes, traffic control may be according to Standard 702001.
 All dimensions are in inches (millimeters) unless otherwise shown.

① Minimum distance is 200' (60 m). Maximum distance to be determined by the Engineer but shall not exceed 1/2 the length required for one normal working day's operation of 2 miles (3200 m), whichever is less.

TYPICAL APPLICATIONS
 Bituminous resurfacing
 Milling operations
 Utility operations
 Shoulder operations


SYMBOLS

- Work area
- Sign on portable or permanent support
- Flagger with traffic control sign

Minnesota Department of Transportation
 DIVISION OF HIGHWAYS
 15500 3-1-97
 PROJECT NO. _____ DATE _____
 DRAWING NO. _____ DATE _____
 DESIGNED BY _____
 CHECKED BY _____
 APPROVED BY _____

LANE CLOSURE, 2L, 2W, SLOW MOVING OPERATIONS DAY ONLY, FOR SPEEDS ≥ 45 MPH
 STANDARD 701306-04

DATE	REVISIONS
1-3-98	Revised lower speed limit for operation to 1/2 mph.
1-1-11	Revised flagger sign.

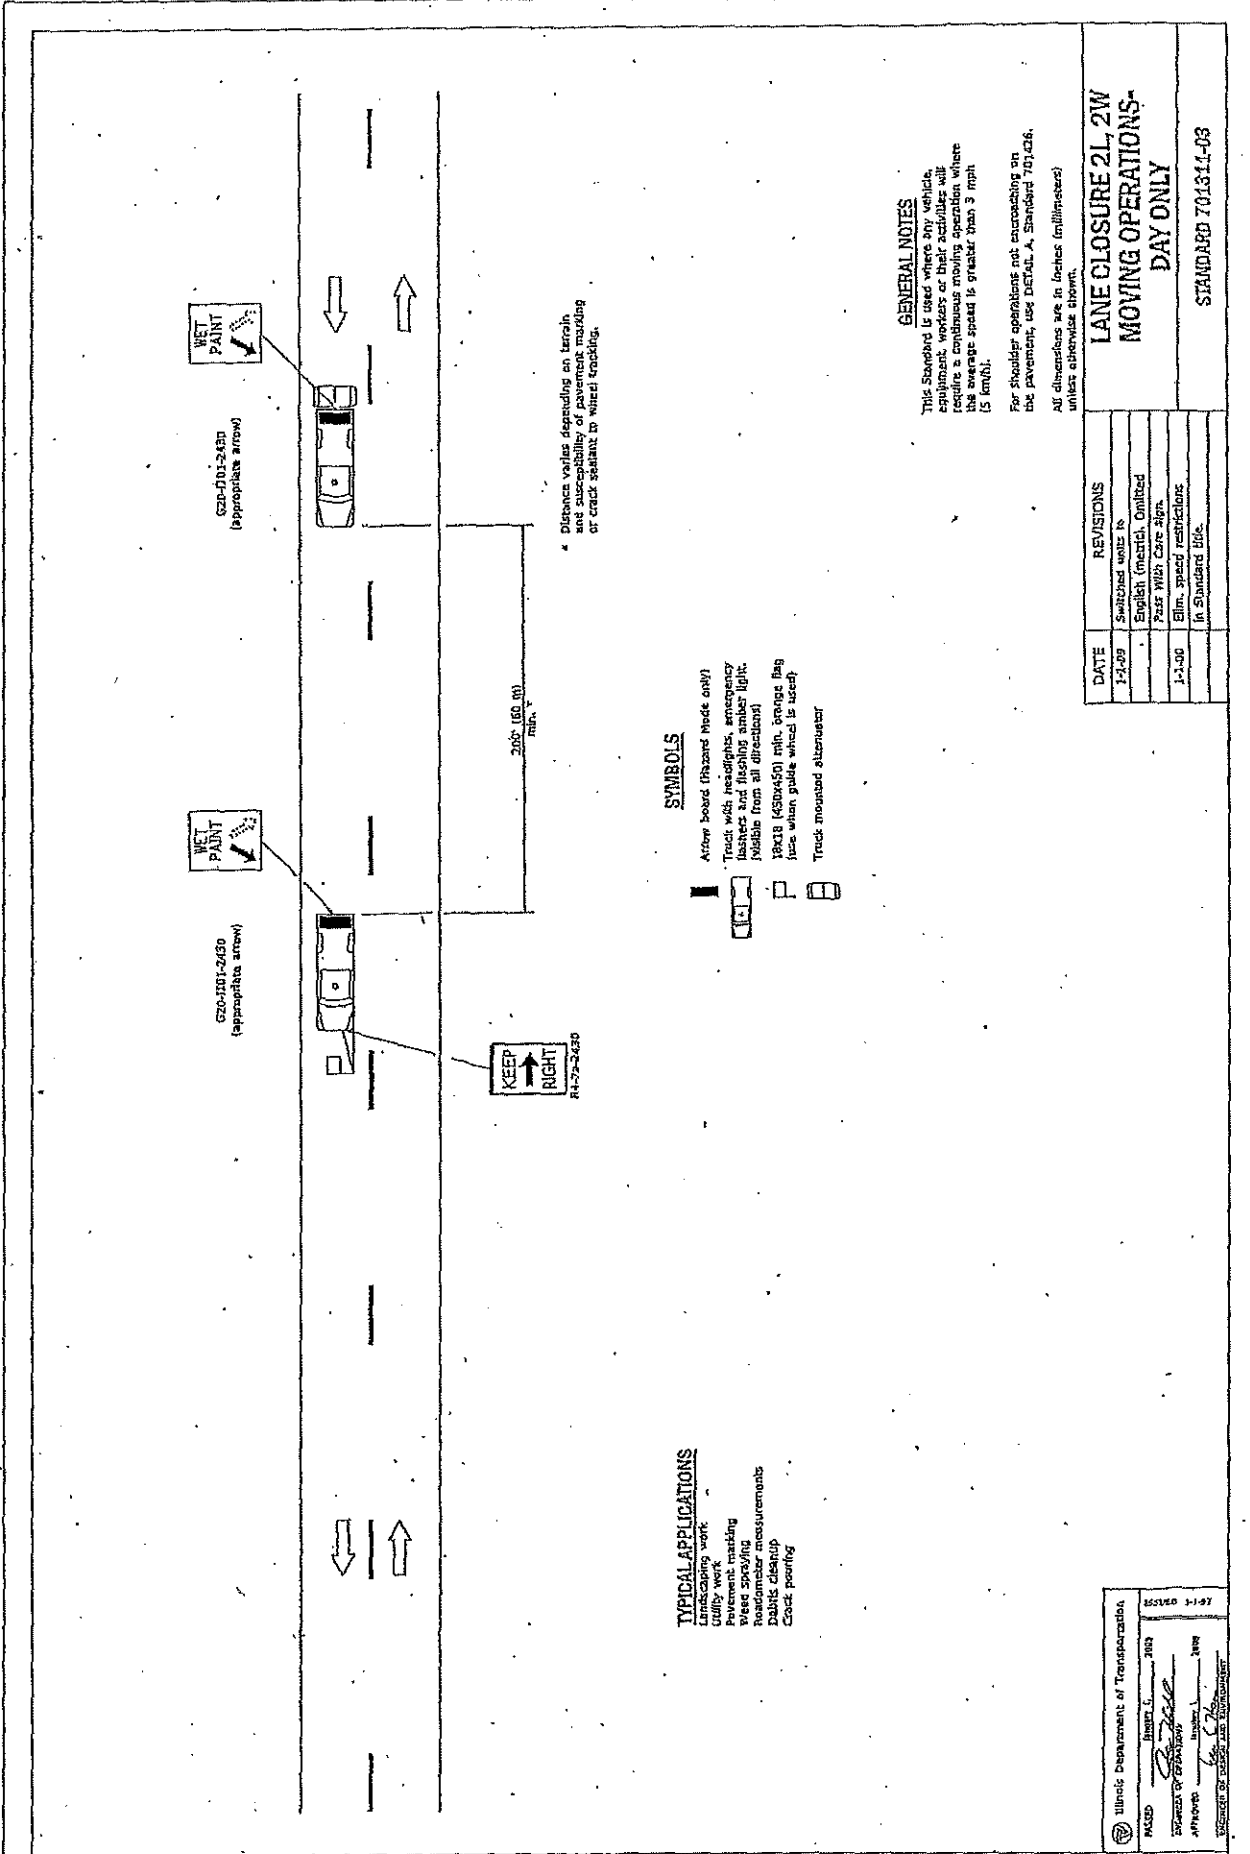

* Distance varies depending on terrain and susceptibility of pavement marking or crack resistant to wheel tracking.

TYPICAL APPLICATIONS

- Lane closing work
- Utility work
- Paving and finishing
- Wheel socking
- Roadometer measurements
- Dabbis cleanup
- Crack pouring

SYMBOLS

- Arrow board (Flashed mode only)
- Truck with headlights, emergency flashers and flashing amber light (visible from all directions)
- 18x18 (430x450) mm, orange flag (use when public work is used)
- Truck-mounted attenuator

GENERAL NOTES

This Standard is based on the use of equipment, workers or their activities will require a continuous moving operation where the average speed is greater than 3 mph (5 km/h).

For shoulder operations not encroaching on the pavement, use DETAIL A, Standard 701.016. All dimensions are in inches (millimeters) unless otherwise shown.

LANE CLOSURE 2L, 2W MOVING OPERATIONS- DAY ONLY

STANDARD 701.016-03

DATE	REVISIONS
1-1-09	Switched note to English (Metric), Omitbed Post With Care sign.
1-1-00	Elim. speed restrictions in Standard Bldg.

Illinois Department of Transportation

ISSUED 1-1-07


APPROVED: *[Signature]* 2013

DESIGNED BY: *[Signature]*

DATE: 1-1-07

BY: *[Signature]*

FOR: *[Signature]*

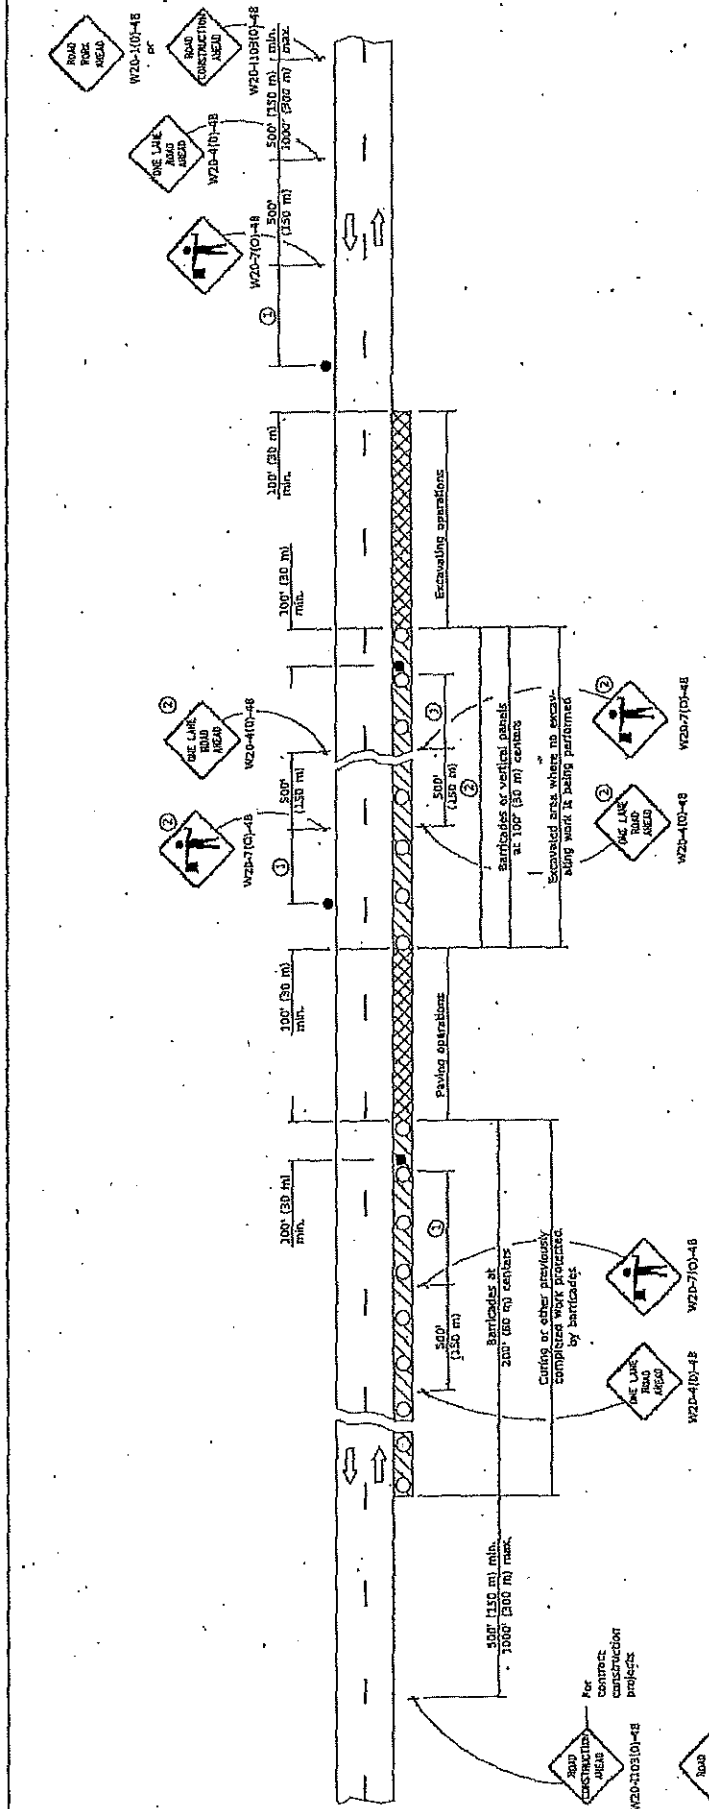

SYMBOLS

- ▨ Work area
- ▨ Active Work area
- Sign
- Barricade, drum, or vertical panel
- Flagger with traffic control sign

GENERAL NOTES

This Standard is used where at any time, any vehicle, equipment, workers or their activities will encroach on the pavement during widening operations.

Two flaggers are required for each separate operation.

All dimensions are in inches (millimeters) unless otherwise stated.

① Minimum clearance is 200' (60 m). Maximum distance to be determined by the Engineer but in no case to exceed the length of ½ day's normal operation or 2 miles (3200 m) whichever is less.

② Signs are not required if distance between work operations is less than 2000' (600 m) unless restricted sight distance exists.

REVISIONS	
DATE	REVISIONS
5-3-11	Revised flagger sign.
3-3-09	Switched units to English (mksd).
	Corrected sign No. 4.

LANE CLOSURE, 2L, 2W, PAVEMENT WIDENING, FOR SPEEDS ≥ 45 MPH

STANDARD 70.1326-04

Illinois Department of Transportation


PROJECT NO. 2011-01-01-01

DESIGNED BY: [Signature]

CHECKED BY: [Signature]

APPROVED BY: [Signature]

DATE: 11/14/11

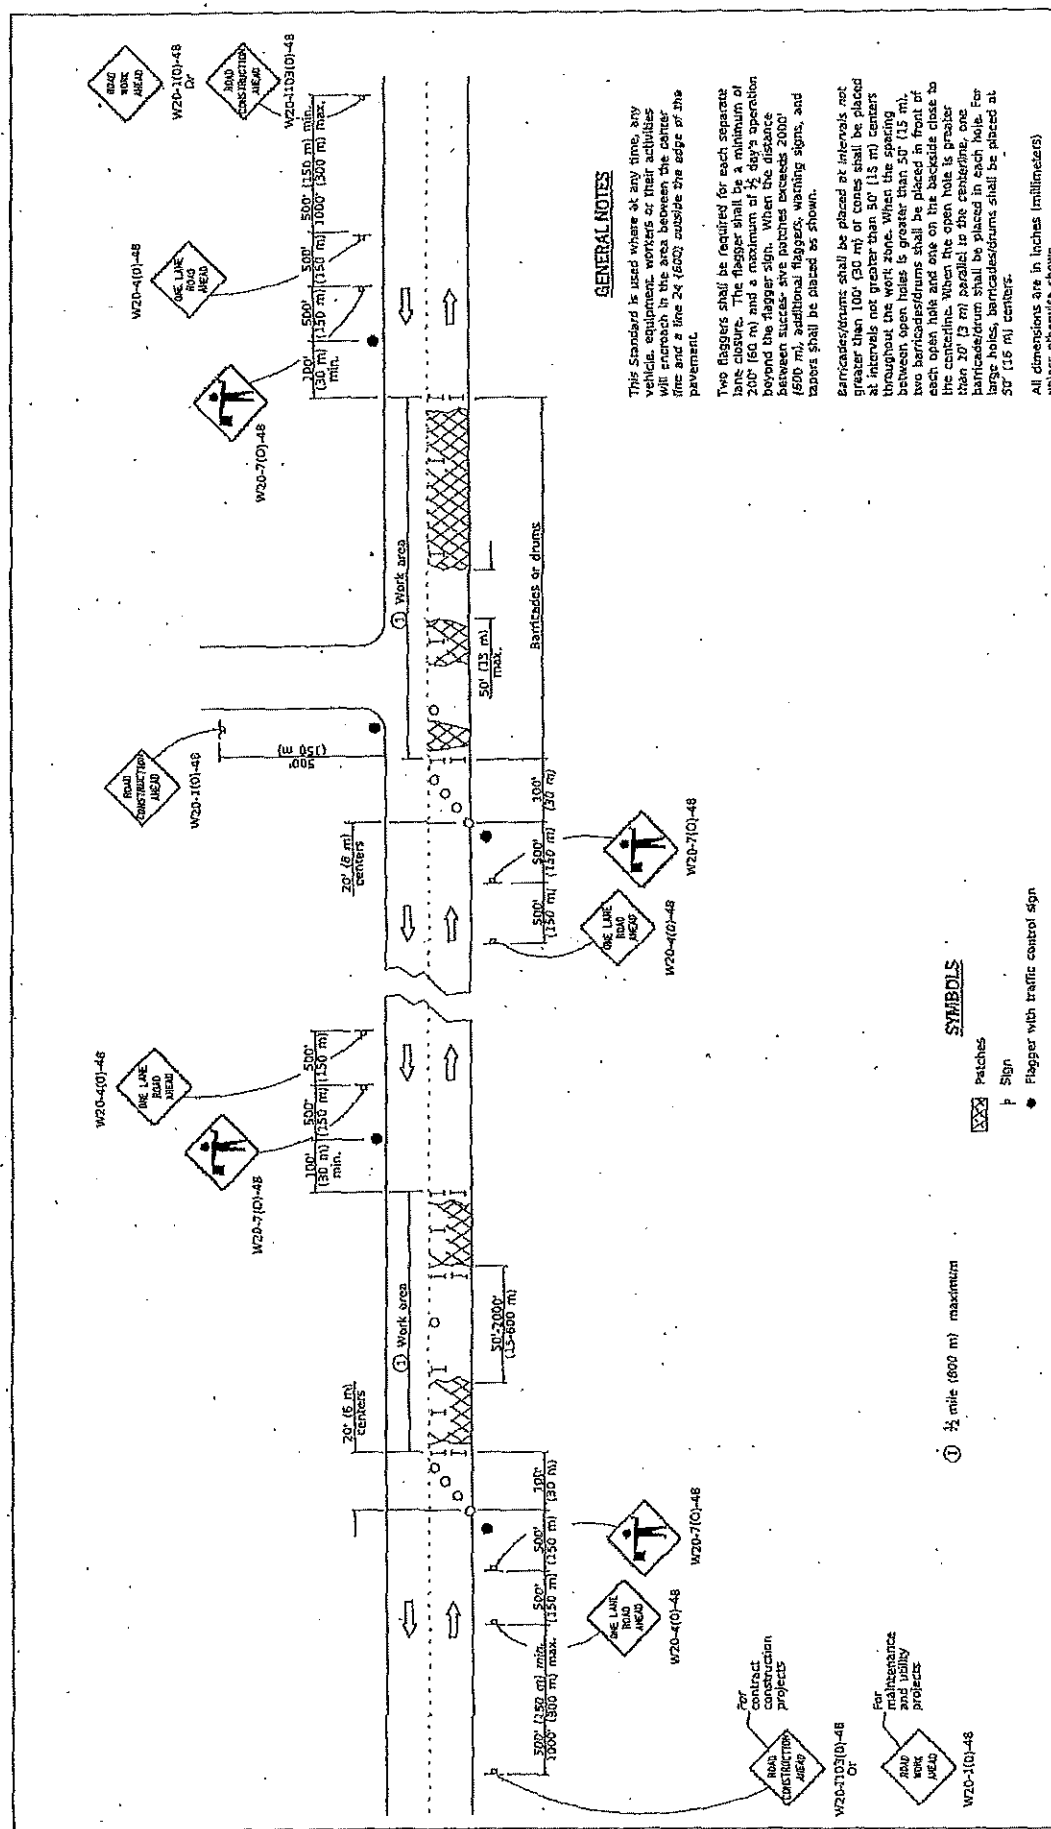

GENERAL NOTES

This Standard is used where at any time, any vehicle, equipment, workers or their activities will impinge in any way between the center line and the 24' (7.32 m) outside the edge of the pavement.

Two flaggers shall be required for each separate lane closure. The flagger shall be a minimum of 200' (60 m) and a maximum of 1/2 day's operation beyond the flagger sign. When the distance between successive patches exceeds 2000' (600 m), additional flaggers, warning signs, and tapers shall be placed as shown.

Barricades/drums shall be placed at intervals not greater than 100' (30 m) and shall be placed at intervals not greater than 50' (15 m) between patches in the work zone. When the spacing between open holes is greater than 50' (15 m), two barricades/drums shall be placed in front of each open hole and one on the backside close to the centerline. When the open hole is greater than 20' (6 m) parallel to the centerline, one barricade/drum shall be placed in each hole. For large holes, barricades/drums shall be placed at 50' (15 m) centers.

All dimensions are in inches (millimeters) unless otherwise shown.

SYMBOLS

- XXXX Patches
- P Sign
- Flagger with traffic control sign
- I Barricade or drum
- Cons. barricade or drum

① 1/2 mile (800 m) maximum

TYPICAL APPLICATIONS

Patching

DATE	REVISIONS
1-2-19	Revised advice spacing in table.
3-2-11	Revised flagger sign.

LANE CLOSURE, 2L, 2W, WORK AREAS IN SERIES, FOR SPEEDS ≥ 45 MPH


STANDARD 701336-07

Illinois Department of Transportation

APPROVED: [Signature] DATE: 1-1-97

DESIGNED BY: [Signature] DRAWN BY: [Signature]

CHECKED BY: [Signature] ENGINEER: [Signature]

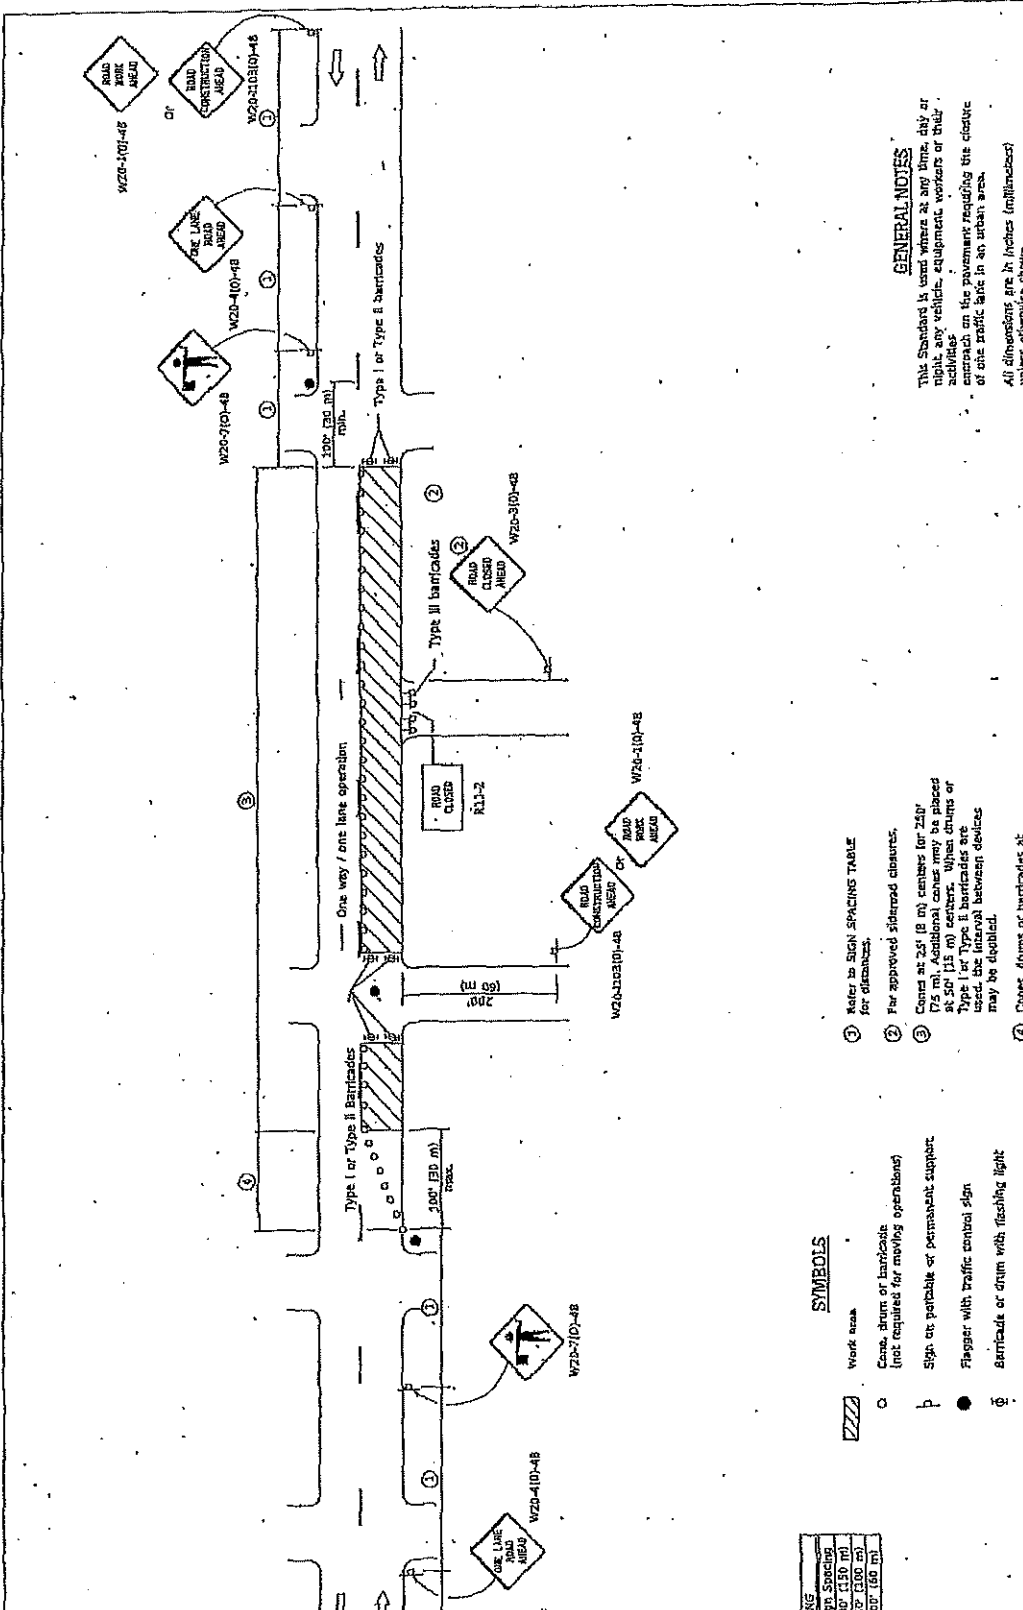

GENERAL NOTES
 The Standard is used where at any time, day or night, any vehicle, equipment, workers or their activities encroach on the pavement requiring the closure of the traffic lane in an urban area.
 All dimensions are in inches (millimeters) unless otherwise shown.

DATE	REVISIONS
3-3-31	Revised flagger sign.
3-3-09	Switched units to English (Imperial).
	Corrected sign No. 2.

**URBAN LANE CLOSURE,
 2L, 2W, UNDIVIDED**
 STANDARD 701501-06

- KEY TO SIGN SPACING TABLE**
 for distances:
1. For approved staggered closures.
 2. Cones at 25' (8 m) centers for 250' (75 m). Additional cones may be placed at 50' (15 m) centers. When drums or Type I or Type II barricades are used, the interval between devices may be doubled.
 3. Cones drums or barricades at 20' (6 m) centers.

- SYMBOLS**
- Work area
 - Cones, drums or barricade (not required for moving operations)
 - Sign on portable or permanent support
 - Flagger with traffic control sign
 - Barricade or drum with flashing light
 - Type III barricade with flashing lights

SIGN SPACING	SIGN SPACING
50'-45'	500' (150 m)
50'-45'	350' (100 m)
45'	200' (60 m)

Illinois Department of Transportation

PROJECT: _____

DATE: _____


DESIGNED BY: _____

CHECKED BY: _____

APPROVED BY: _____

TITLE: _____

W20-101-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-102-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-103-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-104-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-105-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-106-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-107-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-108-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-109-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-110-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-111-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-112-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-113-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-114-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-115-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-116-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-117-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-118-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-119-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-120-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-121-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-122-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-123-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-124-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-125-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-126-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-127-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-128-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-129-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-130-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-131-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-132-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-133-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-134-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-135-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-136-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-137-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-138-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-139-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-140-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-141-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-142-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-143-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-144-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-145-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-146-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-147-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-148-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-149-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-150-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-151-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-152-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-153-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-154-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-155-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-156-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-157-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-158-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-159-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-160-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-161-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-162-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-163-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-164-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-165-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-166-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-167-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-168-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-169-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-170-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-171-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-172-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-173-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-174-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-175-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-176-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-177-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-178-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-179-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-180-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-181-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-182-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-183-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-184-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-185-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-186-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-187-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-188-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-189-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-190-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-191-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-192-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-193-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-194-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-195-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-196-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-197-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-198-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-199-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD
 W20-200-48
 ROAD AHEAD
 ROAD CONSTRUCTION AHEAD
 ONE LANE ROAD AHEAD

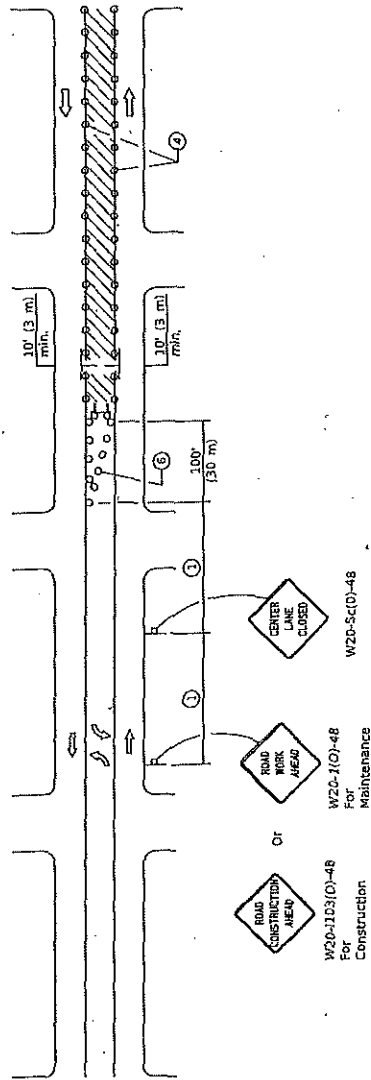

ROAD CONSTRUCTION AHEAD
W20-123(D)-48
For Construction

OR

ROAD AHEAD
W20-110(D)-48
For Maintenance

CENTER LINE CLOSED
W20-50(D)-48

CASE I
(Signs required for both directions)

- 1 Refer to SIGN SPACING TABLE for distances.
- 2 Required for speeds > 40 mph (70 km/h).
- 3 Required if work exceeds 500' (164 m) or 1 block.
- 4 Cones at 35' (8 m) centers for 250' (75 m) work area. Additional cones may be placed at 50' (15 m) centers. When drums or type I or II barricades are used, the interval between devices may be doubled.
- 5 For approved sideroad closures.
- 6 Cones, drums or barricades at 20' (6 m) centers in taper.
- 7 Use flagger sign only when flagger is present.

POSTED SPEED	MIN. SIGN SPACING
55	500' (150 m)
50-45	350' (100 m)
<45	200' (60 m)

SYMBOLS

- Work area
- Barricade or drum with flashing light
- Flagger with traffic control sign
- Cone, drum or barricade
- Sign on portable or permanent support
- Type III barricade with flashing lights

GENERAL NOTES

This Standard is used to close one lane of an urban, two lane, two way roadway with a bidirectional turn lane.

Case I applies when no workers are present. When workers are present, this Standard shall be closed and traffic control shall be according to Standard 701502.

Calculate L as follows:

SPEED LIMIT

English (Metric)

$L = \frac{WS^2}{60}$ $L = \frac{WS^2}{150}$

$L = (W)(S)$ $L = 0.65(W)(S)$

40 mph (70 km/h) or less

45 mph (80 km/h) or greater

W = Width of offset in feet (meters).

S = Normal posted speed mph (km/h).

All dimensions are in inches (millimeters) unless otherwise shown.

URBAN LANE CLOSURE, 2L, 2W, WITH BIDIRECTIONAL LEFT TURN LANE

(Sheet 1 of 2)

STANDARD 701502-09

DATE	REVISIONS
3-3-19	Revised to allow cones at night.
3-3-18	Corrected sign number for TWO WAY TRAFFIC sign for CASE II.

Illinois Department of Transportation

Approved: _____ Date: 3-1-2019


Checked: _____ Date: 3-1-2019

Engineer in Charge: _____

ISSUED 3-1-01

**URBAN LANE CLOSURE,
2L, 2W, WITH BIDIRECTIONAL
LEFT TURN LANE**
(Sheet 2 of 2)

STANDARD 701502-09

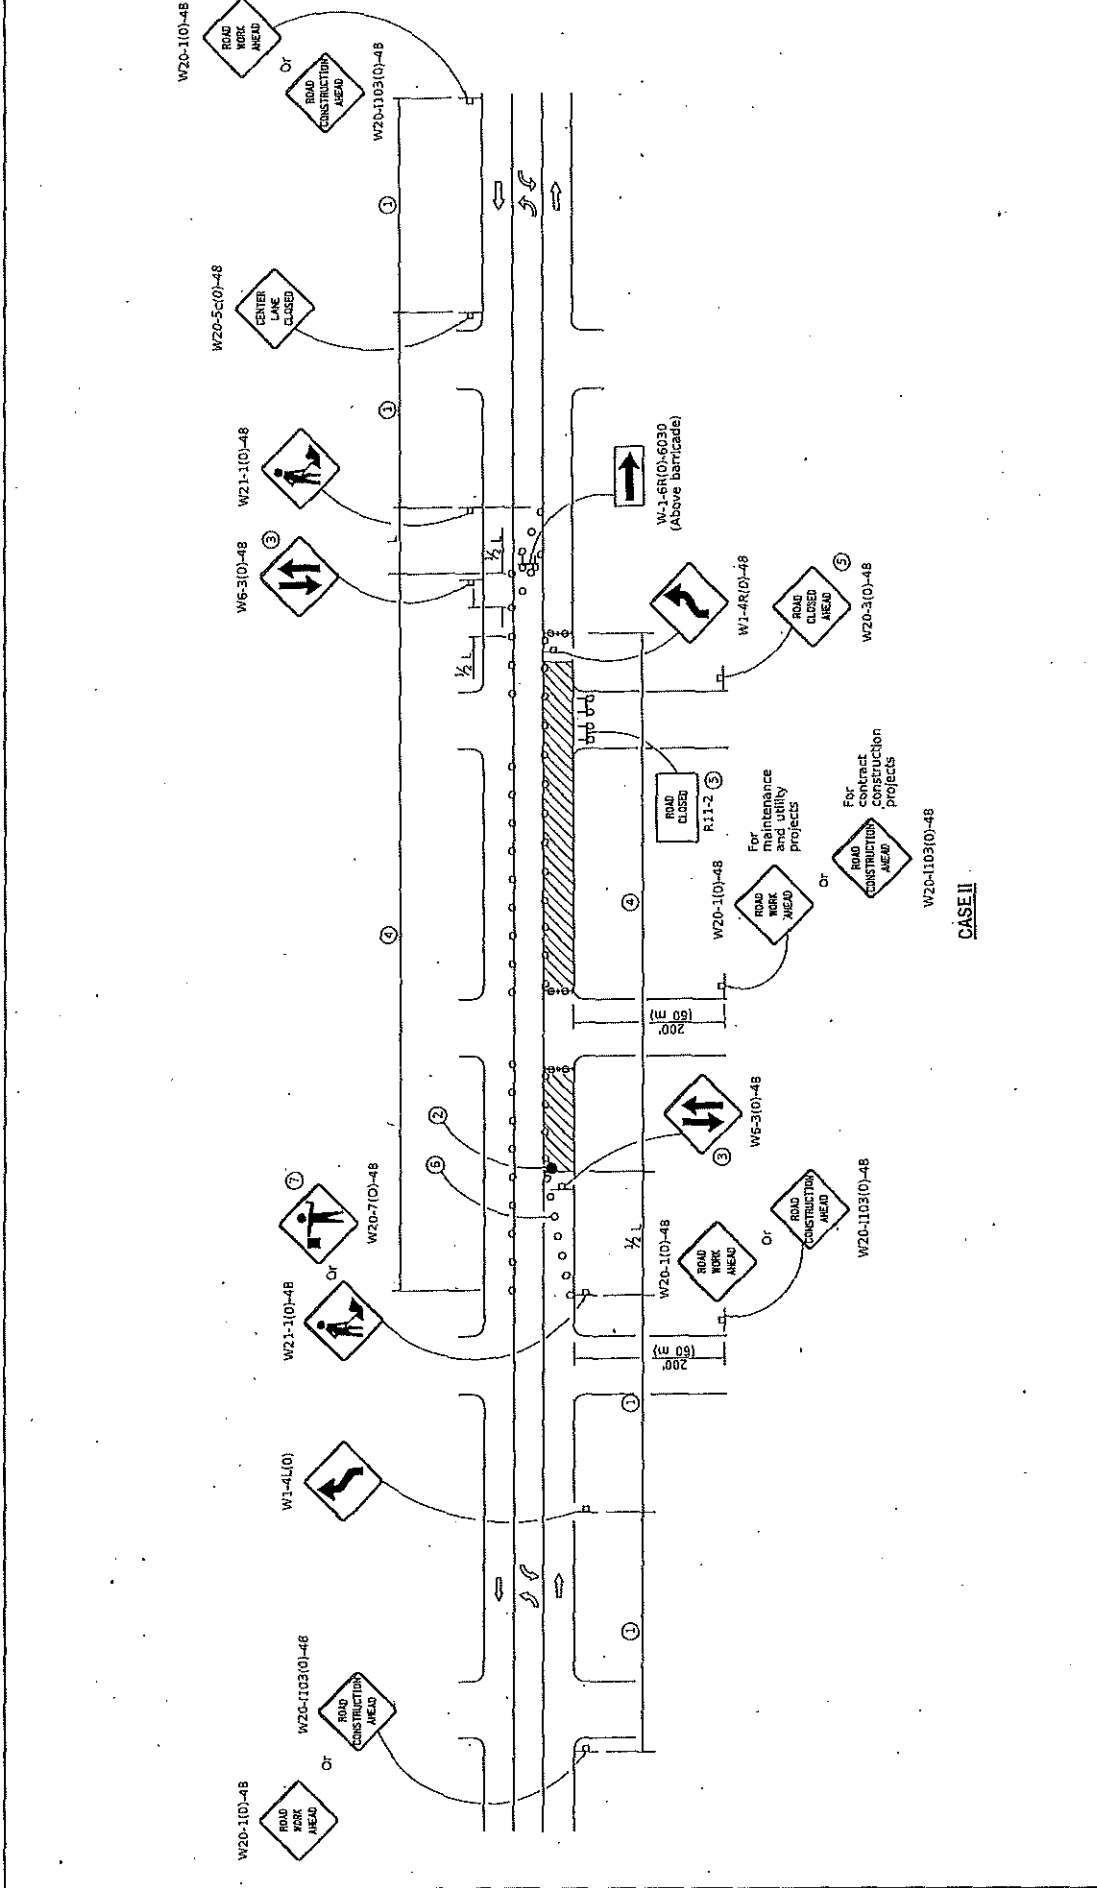


CASE II


Illinois Department of Transportation

ISSUED 1-1-01


Approved: *[Signature]* January 1, 2019
 Checked: *[Signature]* January 1, 2019
 Engineer of Traffic Signs and Engineering
 Approved: *[Signature]* January 1, 2019
 Engineer of Roadway and Pavement

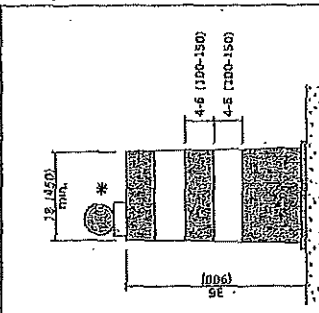


DRUM

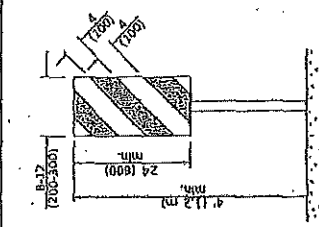


VERTICAL PANEL
POST MOUNTED

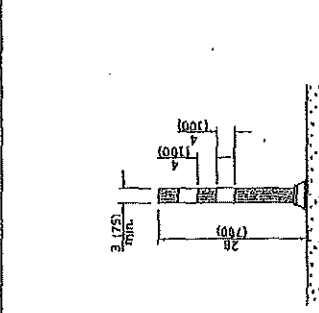


TUBULAR MARKER

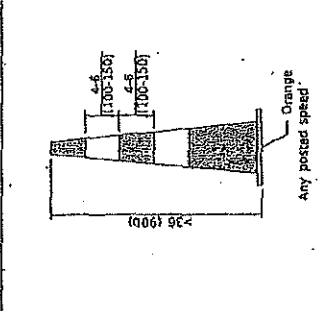


DAY OR NIGHTTIME USE

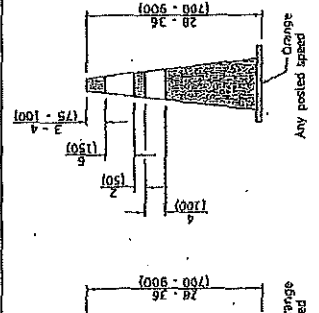


CONES

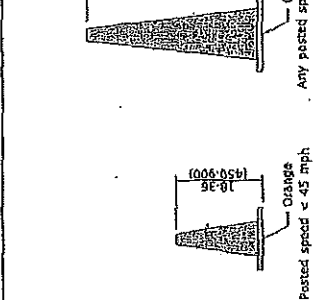


DAYTIME USE

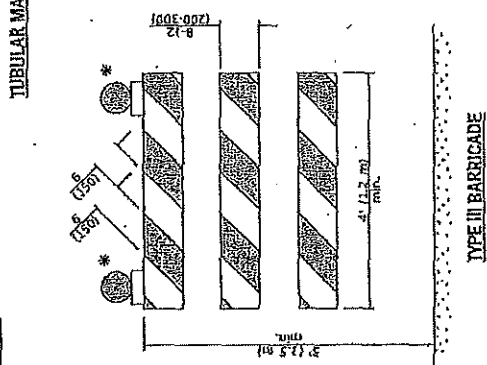


TYPE II BARRICADE

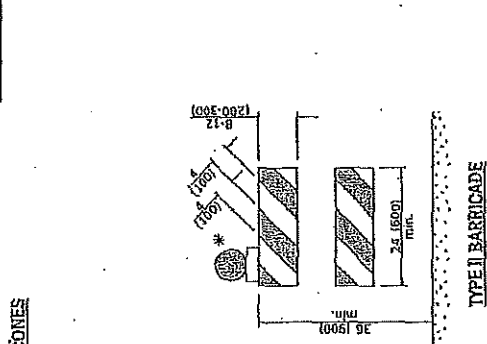

TYPE III BARRICADE

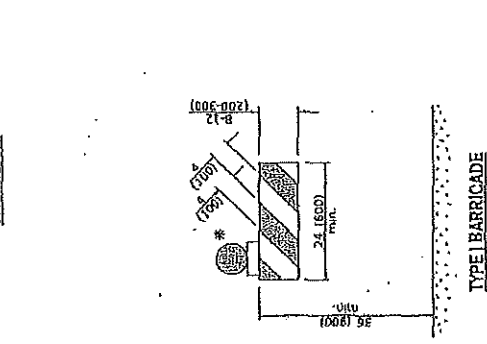

DIRECTION INDICATOR
BARRICADE

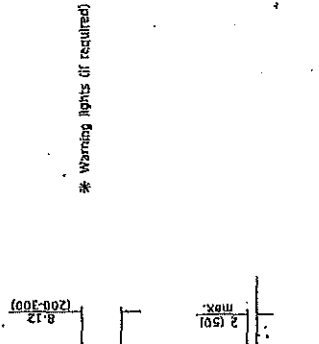

DETECTABLE PEDESTRIAN
CHANNELIZING BARRICADE

GENERAL NOTES

All heights shown shall be measured above the pavement surface.
All dimensions are in inches (millimeters) unless otherwise shown.


DATE	REVISIONS
3-3-19	Revised cone usage and added cone 36" (900 mm) height.
1-1-18	Revised ENR WORK ZONE SPEED LIMIT sign from orange to white background.

TRAFFIC CONTROL
DEVICES

STANDARD 701901-08
(Sheet 1 of 3)


Illinois Department of Transportation
APPROVED: [Signature] 2019
ENGINEER IN CHARGE, TRANSPORTATION DIVISION
APPROVED: [Signature] 2019
NUMBER OF PAGES AND SHEETS: 1/1

* Warning lights if required

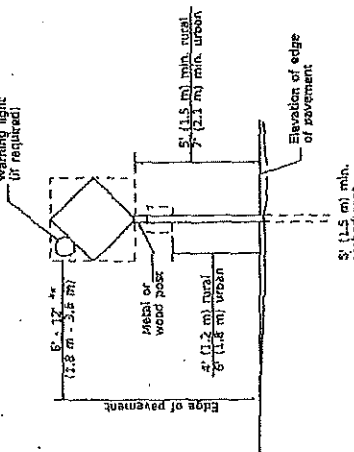


POST MOUNTED SIGNS

When curb or paved shoulder are present this number shall be 24 (600) on the face of curb or 5' (15.2 m) to the outside edge of the paved shoulder.

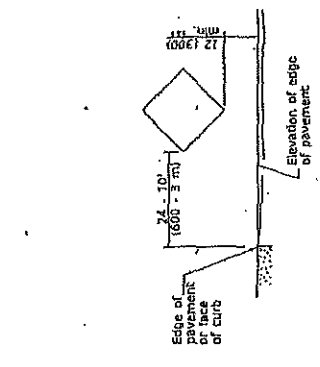

SIGNS ON TEMPORARY SUPPORTS

When work operations exceed four days, this dimension shall be 5' (1.5 m) min. If located behind other devices, the height shall be sufficient to be seen completely above the devices.

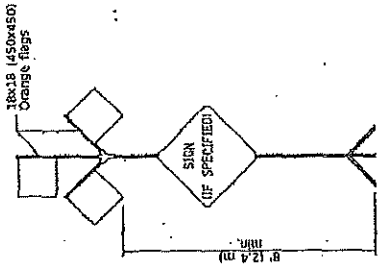


HIGH LEVEL WARNING DEVICE

ROAD CONSTRUCTION NEXT X MILES
G20-1104(0)-6036


END CONSTRUCTION
G20-1105(0)-6024

This signing is required for all projects 2 miles (3200 m) or more in length. ROAD CONSTRUCTION NEXT X MILES sign shall be placed 500' (150 m) in advance of project limits. END CONSTRUCTION sign shall be erected at the end of the job unless another job is within 2 miles (3200 m). Dual sign displays shall be utilized on multi-lane highways.

WORK LIMIT SIGNING

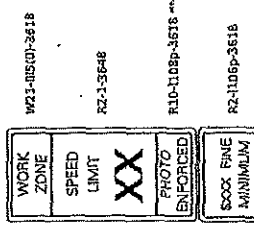


Sign assembly as shown on Standards or as allowed by district operators.




This sign shall be used when the above sign assembly is used.

HIGHWAY CONSTRUCTION SPEED ZONE SIGNS

Signatures shall only be used along roadways under the jurisdiction of the State.

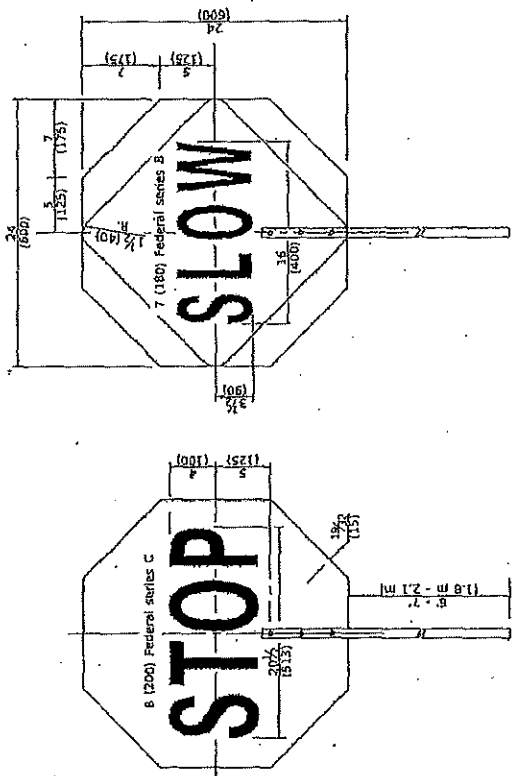

FRONT SIDE
REVERSE SIDE

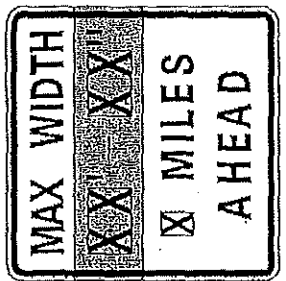

WT2-1103-48-68

WIDTH RESTRICTION SIGN

XX=xxx width and X miles are variable.

TRAFFIC CONTROL DEVICES

(Sheet 2 of 3)

STANDARD 701901-08


Illinois Department of Transportation

DESIGNED BY: [Signature] DATE: 2019


APPROVED BY: [Signature] DATE: 2019

PROJECT NO: 1103-48-68


REVISION NO: 01

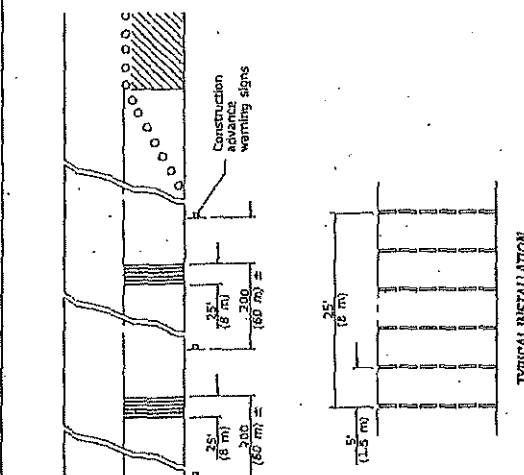

TYPICAL INSTALLATION

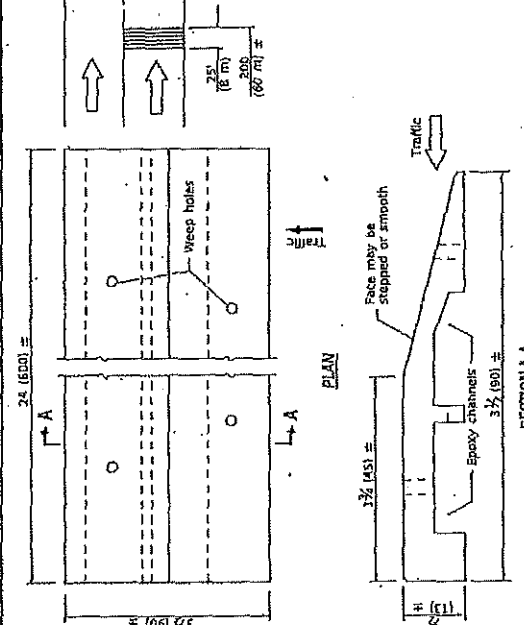


TEMPORARY RUMBLE STRIPS

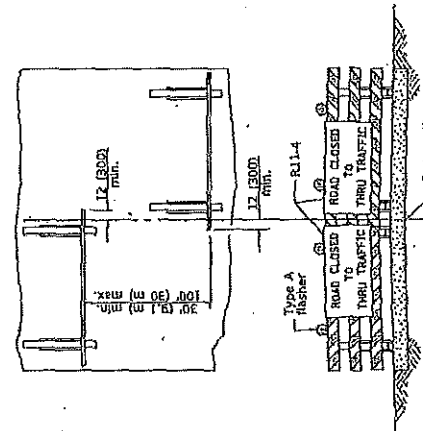


ROAD CLOSED TO THRU TRAFFIC

Reflectorized striping shall appear on both sides of the barricades. If a Type III barricade with an attached sign is used, the sign may be mounted on MCHRP 350 temporary sign supports directly in front of the barricade.

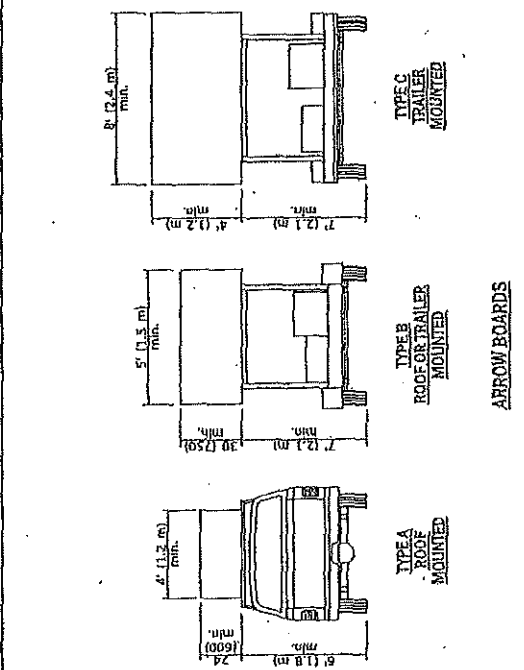

ARROW BOARDS

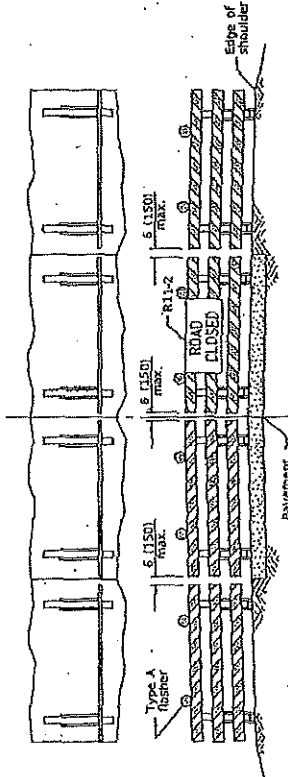

ROAD CLOSED TO ALL TRAFFIC



Reflectorized striping may be omitted on the back side of the barricades. If a Type III barricade with an attached sign is used, the sign may be mounted on MCHRP 350 temporary sign supports directly in front of the barricade.

TYPICAL APPLICATIONS OF TYPE III BARRICADES CLOSING A ROAD

TRAFFIC CONTROL DEVICES
STANDARD 701901-08
(Sheet 3 of 3)

Illinois Department of Transportation
 APPROVED: _____ DATE: 2019
 CHIEF ENGINEER
 APPROVED: _____ DATE: 2019
 CHIEF OF SAFETY, REG. AND INSPECTION
 ILLINOIS DEPARTMENT OF TRANSPORTATION

A B C D E F G H I J
 K L M N O P Q R S
 T U V W X Y Z 1 2
 3 4 5 6 7 8 9 0

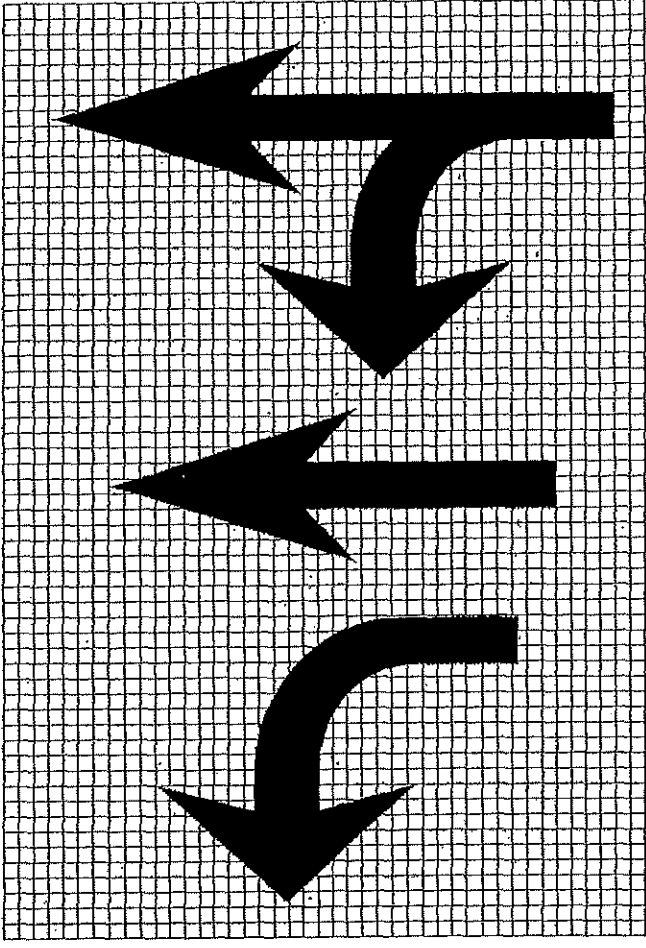


Legend Height	Arrow Size	b
6" (1.5 m)	Small	2.5 (70)
6" (1.5 m)	Large	3.5 (95)

The space between adjacent letters of the size shown in legend entry 3 (75) for 6" (1.5 m) legend and 4 (100) for 2" (2.4 m) legend.


LETTER AND ARROW GRID SCALE

Illinois Department of Transportation
 Approved: _____ 2015
 Director of Transportation
 Approved: _____ 2015
 Director of Design and Construction


TYPICAL PAVEMENT MARKINGS
 STANDARD T8C001-05
 (Sheet 2 of 3)

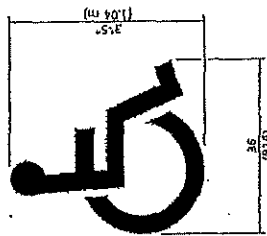


INTERNATIONAL SYMBOL OF ACCESSIBILITY

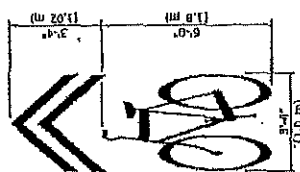

SHARED LANE SYMBOL



BIKE SYMBOL (Arrow is optional.)




ARROW SYMBOL




20" (50.8 mm) urban
30" (76.2 mm) rural
(Between arrow and word or between words)

ONLY

WORD AND ARROW LAYOUT

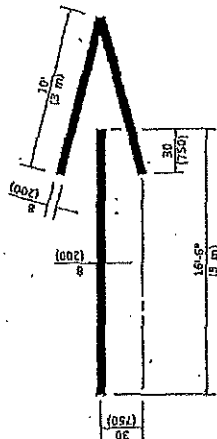

WRONG WAY ARROW

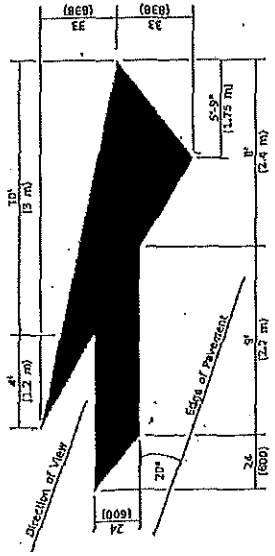

LANE-REDUCTION ARROW
Slight lane-reduction arrow shown.
Use mirror image for left lane.

TYPICAL PAVEMENT MARKINGS



(Sheet 3 of 3)

STANDARD 780001-05


Illinois Department of Transportation
 ISSUED 1-1-99
 NUMBER 3 2011
 NUMBER OF OPERATIONS
 APPROVED NUMBER 1 2011
 SIGNATURE OF OPERATIONS MANAGER

Reduce to 40' (12.2 m) o.c. on curves with posted or advisory speeds of 45 mph (70 km/h) or less.

TWO-LANE / TWO-WAY

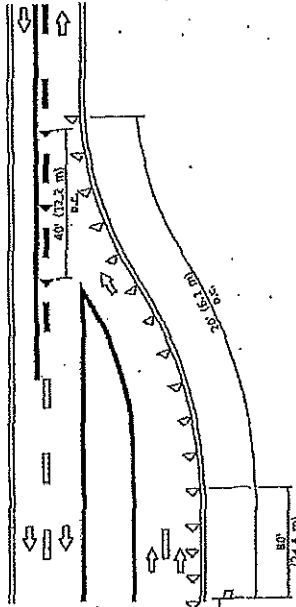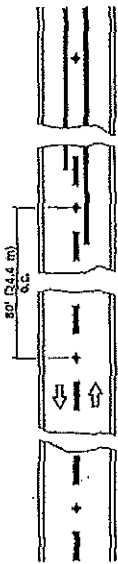


LANE REDUCTION TRANSITION

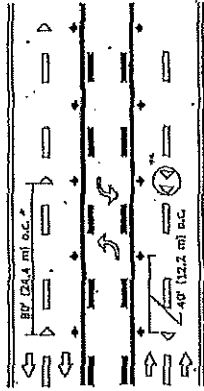


* See MULTI-LANE DIVIDED detail for lane marker notes.

TWO-WAY LEFTTURN

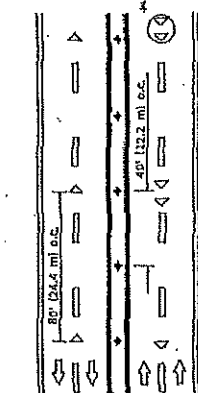

* See MULTI-LANE DIVIDED detail for lane marker notes.


MULTI-LANE UNDIVIDED

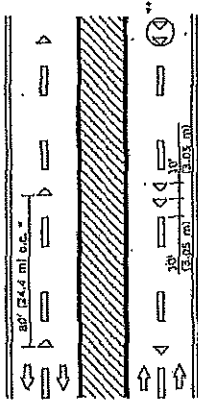

* Reduce to 40' (12.2 m) o.c. on curves where advisory speeds are 30 mph (45 km/h) lower than posted speeds.


* Where double line lane markers are specified, they shall be spaced as shown.

MULTI-LANE DIVIDED

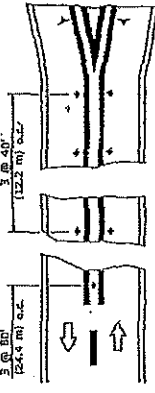

Illinois Department of Transportation
 DIVISION OF TRANSPORTATION
 APPROVED: [Signature]
 DATE: 2015
 PROJECT: [Blank]

RURAL LEFTTURN

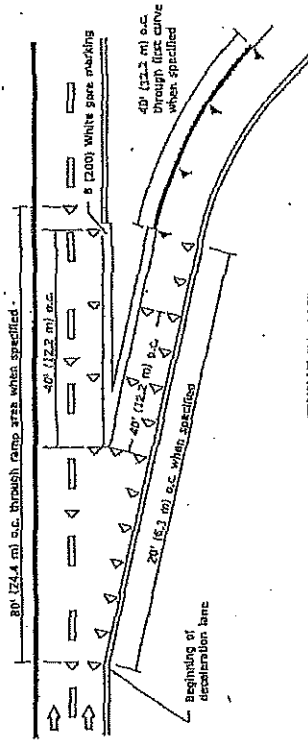

FREEWAY EXIT RAMP

SYMBOLS

- Yellow stripe
- White stripe
- One-way rubber marker
- One-way crystal marker
- Two-way amber marker


All dimensions are in inches (millimeters) unless otherwise shown.

**TYPICAL APPLICATIONS
 RAISED REFLECTIVE
 PAVEMENT MARKERS**


DATE	REVISIONS
4-1-06	Revised LANE ENDS sign
10-4-02	to agree with current MUTCD.
1-1-03	Switched units to English (metric).

STANDARD 781001-04


TYPE	ROAD WIDTH	STRAIGHT	CURVED
1	14	3	3
2	20	5	5
3	30	8	8
4	36	10	10
5	42	12	12
6	48	15	15
7	54	18	18
8	60	21	21
9	66	24	24
10	72	27	27

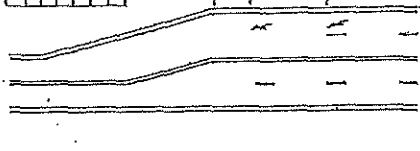


LANE REDUCTION TRANSITION
* LANE REDUCTIONS SHOULD BE MADE AT SPACES OF 45 FEET OR GREATER TO PERMIT PROPER SIGHTING.

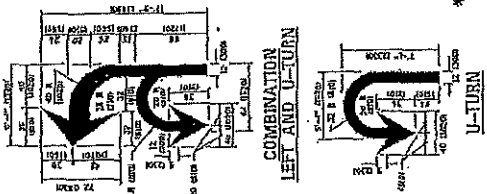

COMBINATION LEFT AND U-TURN

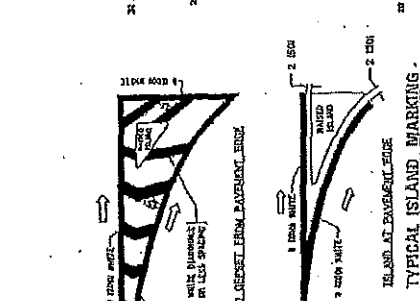


TYPICAL ISLAND MARKING




ISLAND OFFSET FROM PAVEMENT EDGE



TYPICAL PAINTED MEDIAN MARKING

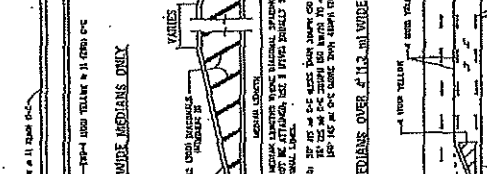

MEDIANS OVER 12' WIDE

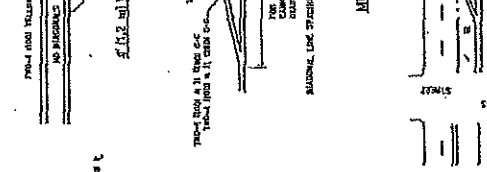


MEDIANS WITH 12' WIDE RISE CURB




MEDIANS WITH 12' WIDE RISE CURB



MULTI-LANE UNDIVIDED

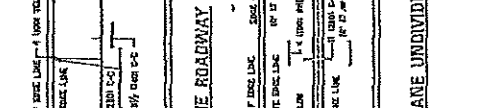

MULTI-LANE DIVIDED WITH MEDIAN

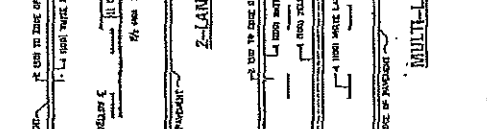

TYPICAL LANE AND EDGE LINE MARKINGS



TYPICAL CROSSWALK MARKINGS

TYPE OF MARKING	WIDTH OF STRIPES	PATTERN	COLOR	SPACING (FEET)	OTHER NOTES
CONTROLLED 2-LANE THROUGH	4 INCHES	STRIPES	YELLOW	20-40	SEE TYPICAL PAINTED MEDIAN MARKING.
CONTROLLED 2-LANE THROUGH	4 INCHES	STRIPES	YELLOW	20-40	SEE TYPICAL PAINTED MEDIAN MARKING.
CONTROLLED 2-LANE THROUGH	4 INCHES	STRIPES	YELLOW	20-40	SEE TYPICAL PAINTED MEDIAN MARKING.
CONTROLLED 2-LANE THROUGH	4 INCHES	STRIPES	YELLOW	20-40	SEE TYPICAL PAINTED MEDIAN MARKING.
CONTROLLED 2-LANE THROUGH	4 INCHES	STRIPES	YELLOW	20-40	SEE TYPICAL PAINTED MEDIAN MARKING.
CONTROLLED 2-LANE THROUGH	4 INCHES	STRIPES	YELLOW	20-40	SEE TYPICAL PAINTED MEDIAN MARKING.
CONTROLLED 2-LANE THROUGH	4 INCHES	STRIPES	YELLOW	20-40	SEE TYPICAL PAINTED MEDIAN MARKING.
CONTROLLED 2-LANE THROUGH	4 INCHES	STRIPES	YELLOW	20-40	SEE TYPICAL PAINTED MEDIAN MARKING.
CONTROLLED 2-LANE THROUGH	4 INCHES	STRIPES	YELLOW	20-40	SEE TYPICAL PAINTED MEDIAN MARKING.
CONTROLLED 2-LANE THROUGH	4 INCHES	STRIPES	YELLOW	20-40	SEE TYPICAL PAINTED MEDIAN MARKING.

DISTRICT ONE

TYPICAL DISTRICT ONE MARKINGS

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

FILE NO. _____

REVISION _____

DATE _____

DESIGNED BY _____

DRAWN BY _____

CHECKED BY _____

APPROVED BY _____

CONTRACT NO. _____

SECTION _____

SHEET _____ OF _____


DISTRICT ONE

TYPICAL DISTRICT ONE MARKINGS

DATE _____


SECTION _____

CONTRACT NO. _____

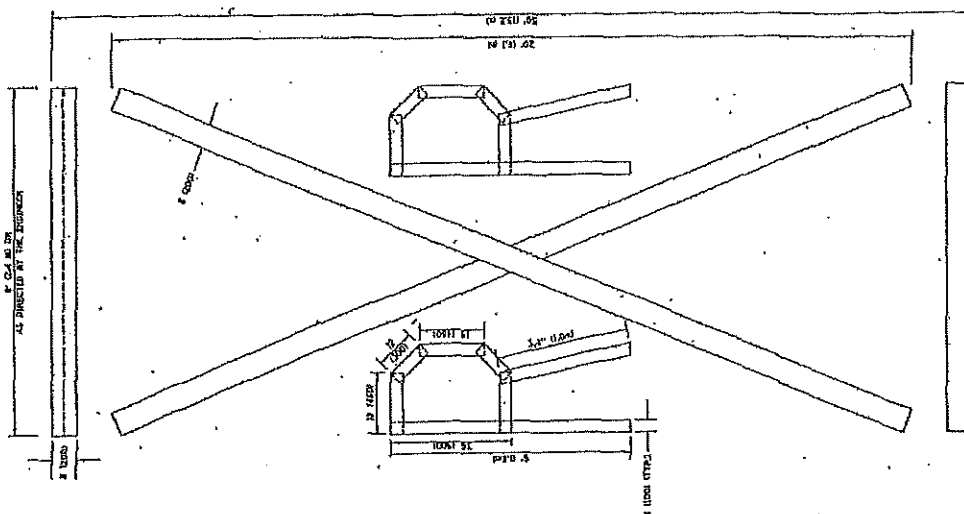


QUANTITY
4 000 LINS = 223.9 sq. ft. 15.9 sq. m

All dimensions are in inches unless otherwise shown.

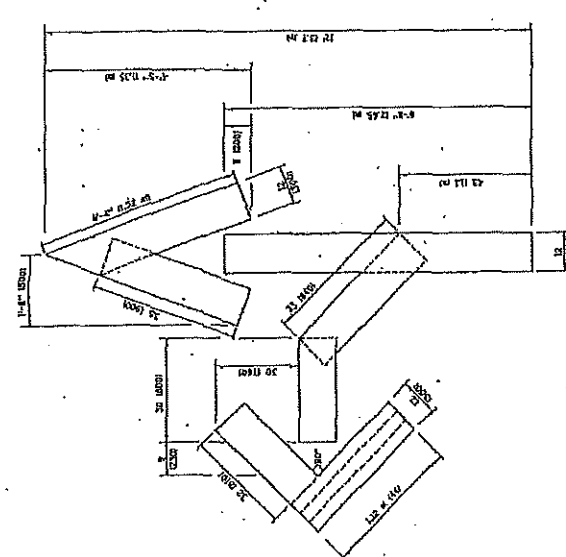


QUANTITY
4 000 LINS = 223.9 sq. ft. 15.9 sq. m

NOTE:
ALL QUANTITIES OF PLACEMENT ARE REPRESENTED IN LINEAR FEET OF 4" LINES TO MATCH THE 4" TEMPORARY TAPE PAY ITEM AND REPRESENTS THE TOTAL QUANTITY OF 4" TAPE REQUIRED.

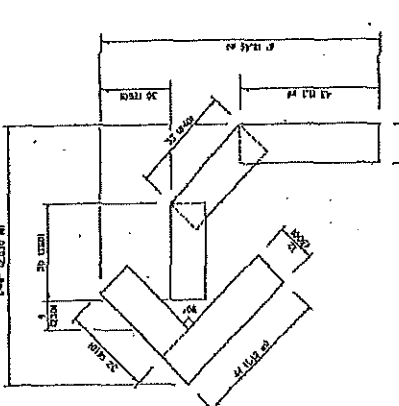


QUANTITY
4 000 LINS = 455 sq. ft. 41.9 sq. m

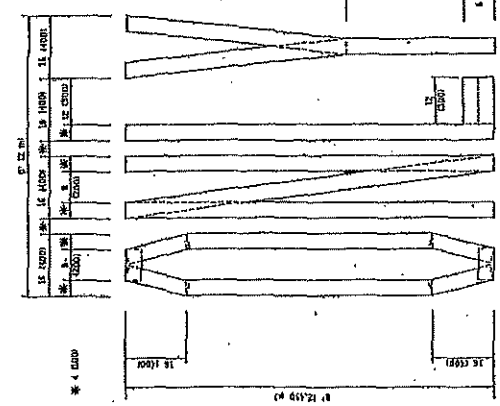


QUANTITY
4 000 LINS = 641 sq. ft. 59.5 sq. m


FILE NO.	PROJECT NO.	SHEET NO.	OF	TOTAL SHEETS
DATE	SECTION	CONST.	DATE	BY
STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION				
PROJECT NAME: [REDACTED]				
SCALE: [REDACTED]				
DESIGNED BY	CHECKED BY	APPROVED BY	DATE	BY
REVISED - 1	REVISED - 2	REVISED - 3	REVISED - 4	REVISED - 5
DATE	DATE	DATE	DATE	DATE

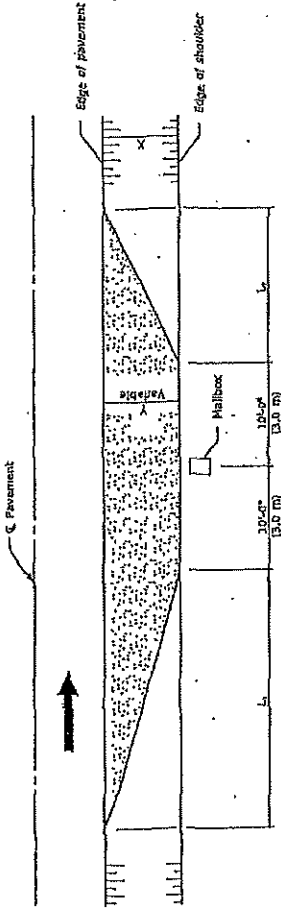

TYPICAL APPLICATION

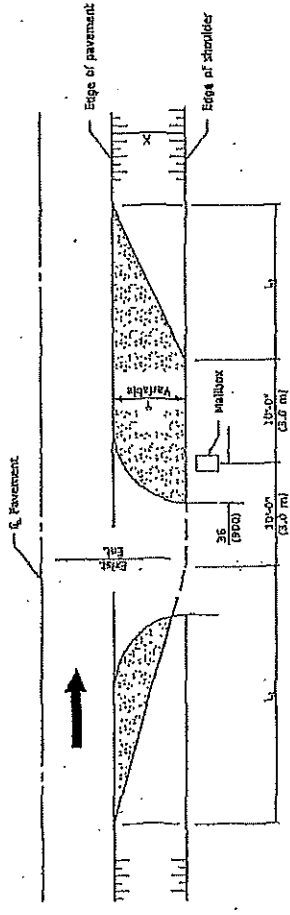

MAILBOX ON FAR SIDE OF ENTRANCE

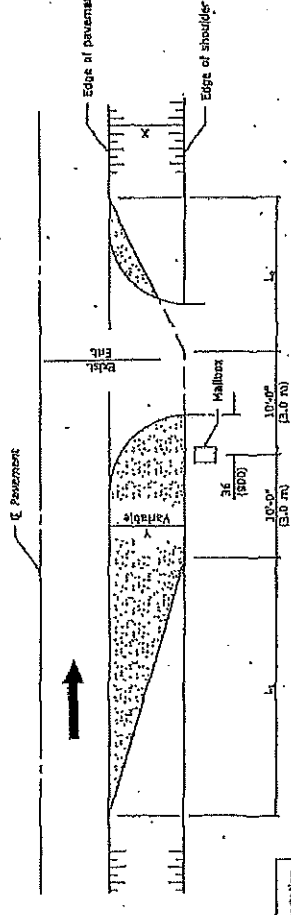

MAILBOX ON NEAR SIDE OF ENTRANCE

DIMENSIONS - ft. (m)

Width of Shoulder (ft.)	Width of Mailbox (ft.)	Height of Mailbox (ft.)	L1 (ft.)	L2 (ft.)
22 (6.7)	6 (1.8)	36 (10.7)	10 (3.0)	11 (3.3)
18 (5.5)	6 (1.8)	36 (10.7)	10 (3.0)	11 (3.3)
14 (4.3)	6 (1.8)	36 (10.7)	10 (3.0)	11 (3.3)
10 (3.0)	6 (1.8)	36 (10.7)	10 (3.0)	11 (3.3)
6 (1.8)	6 (1.8)	36 (10.7)	10 (3.0)	11 (3.3)

Note:
Dimensions for Township and District Roads may vary from the above dimensions.

GENERAL NOTES
Mailboxes shall be mounted such that the face of the mailbox is 6 (150) to 12 (300) and the post a minimum of 24 (600) from the edge of the turnout surfacing.
All dimensions are in inches (millimeters) unless otherwise shown.

DATE	REVISIONS
3-2-09	Revised units to English (metric).
3-2-09	Add width of shoulder L1.

MAILBOX TURNOUT FOR LOCAL ROADS

STANDARD S.L.R. 24-2

Illinois Department of Transportation

PROJECT: District 11, 2009

PROJECT LOCATION: Local Roads

DATE: 3/2/09

SCALE: As Shown

62-1-94878